


1" & 1.5" Nail Strip Snap Lock

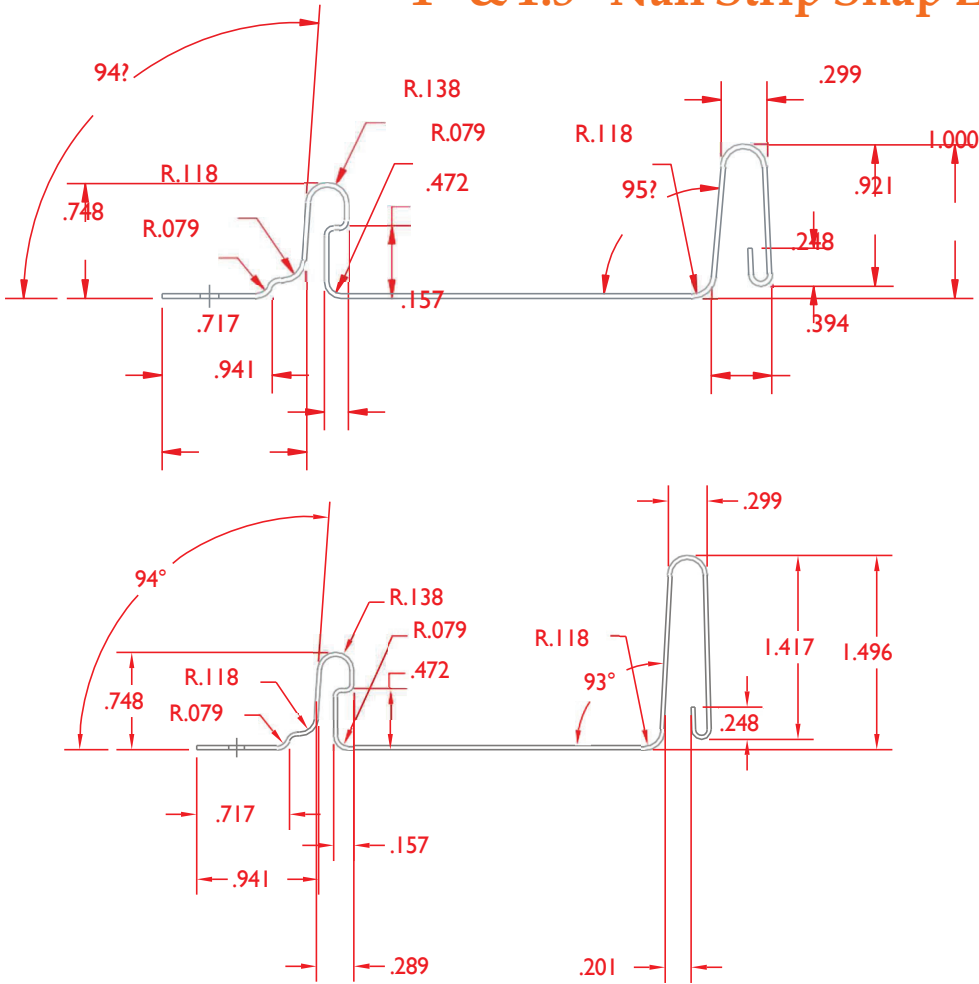

- Architectural standing seam panel.
- 1.0" rib height.
- Gauges 24, 26
- Screw fastening through slotted hole for limited thermal movement.
- Fastest panel in the market for installation.

- Architectural or structural standing seam panel.
- 1.5" rib height.
- Gauges 22, 24, 26
- Screw fastening through slotted hole for limited thermal movement.
- Applies over open purlin or solid substrate.
- Fastest panel in the market for installation

FLORIDA PRODUCT APPROVAL

Designation	FPA #	Panel Profile	Material	Panel Width	Substrate
Non-HVHZ	8629.1	1.0" Nail Strip	Steel, 24ga	16" Nominal	Plywood
HVHZ	9193.3	1.5" Nail Strip	Steel, 24ga	16" Nominal	Plywood

Panel	Type	Test Type	Width	Gauge	Fastener Spacing	Decking
1" Nail	Wind Uplift Class 90	UL Construction Number 600	16	24 CRS	16	1/2 Plywood
1.5" Nail Strip	Flexural Strength	ASTM 330	12	24 CRS	12	Purlins 16 ga
1.5" Nail Strip	Wind Uplift	Dade 80 MPH	15	24 CRS	12	1/2 Plywood
1.5" Nail Strip	Wind Uplift	Dade 140 MPH	15	24 CRS	12	5/8 Plywood
1.5" Nail Strip	Hail	UL Class 4	15	24 CRS	18	5/8 Plywood
1.5" Nail Strip	Impact	Dade Impact	15	24 CRS	18	5/8 Plywood
1.5" Nail Strip	Hail	UL Class 4	15	26 CRS	18	5/8 Plywood
1.5" Nail Strip	Water	Dade Wind Driven Rain	16	24 CRS	18	5/8 Plywood
1.5" Nail Strip	Wind Uplift	ASTM 1592	12	24 CRS	12	Purlins 16 ga
1.5" Nail Strip	Wind Uplift Class 90	UL Construction Number 587	14.5	24 CRS	18	5/8 Plywood
1.5" Nail Strip	Wind Uplift Class 90	UL Construction Number 601	3/16	22 CRS	12	5/8 Plywood