


atamai

SMART COOKING

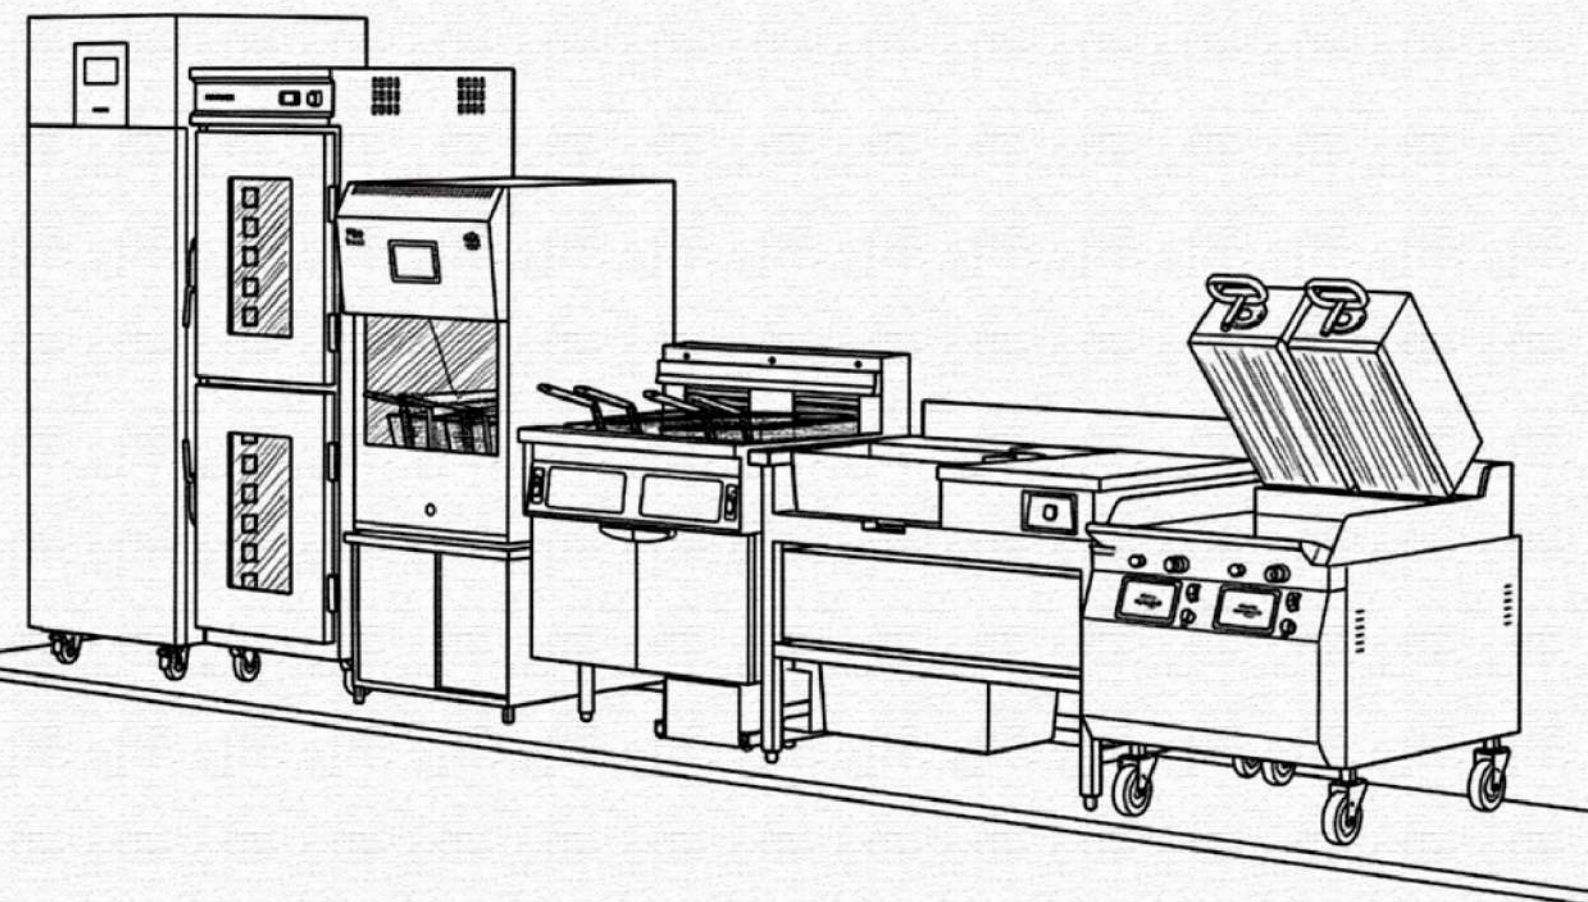

LEAN Manufacturing

Intelligent Cooking Equipment



Holding & Heating Equipment



CONTENT



Fryers Series

Smart Electric Deep Fryer	04-05
Smokeless Deep Fryer	06-07
Auto Double-Sided Griddle	08-09
Automatic Dumpling Fryer	10-11

Grill Series

Microwave Speed Oven	12-13
High-Speed Smokeless Grill	14-15

Steam & Cook Series

Smart Noodle Boiler	16-17
Induction Soup Cooker	18-19
Smart Electric Steam Cabinet	20-21
Smart Rice Cooker	22-23

Warming Series

Vertical Warming Cabinet	24-25
Proofing Cabinet	26-27
Multi-Function Countertop Cooker	28-29
Hot Air Dish Warmer Cabinet	30-31

Other Series

Smart Thawing Cabinet	32-33
Auto Breeding Table	34-35

SMART ELECTRIC


Deep Fryer

Single Tank, Double Tank, 2/3/4 Compartments


- Smart Control
24 one-touch menus, Simple and intuitive
 - Independent Heating
Multi-zone, precise temperature control
 - Energy Efficient
Auto-temp, low-peak mode, quick oil filtration
 - Safety Protection
Overheat cut-off, lift-up shutdown, low-oil alert
- Precise Temperature Control
Flat heating elements deliver efficient, even heating
 - Easy Maintenance
Lift-up heater, anti-oil back panel
 - USB Menu Transfer
Quick menu import and updates



DZ-18-S

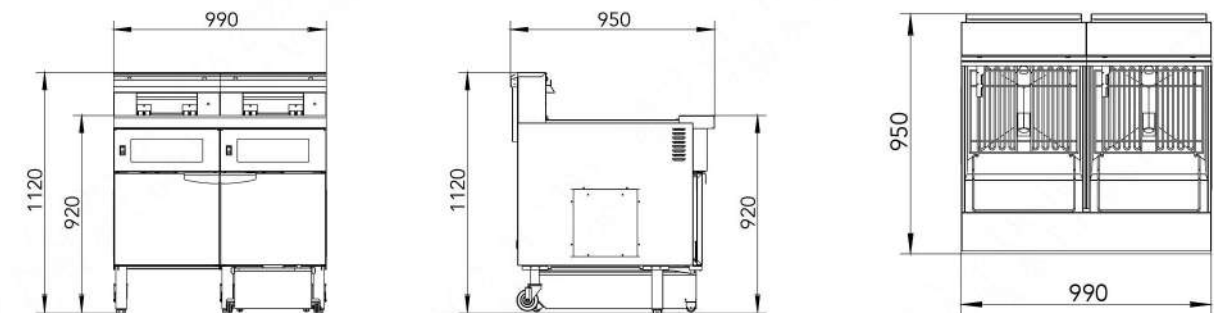

DZ7-4-S

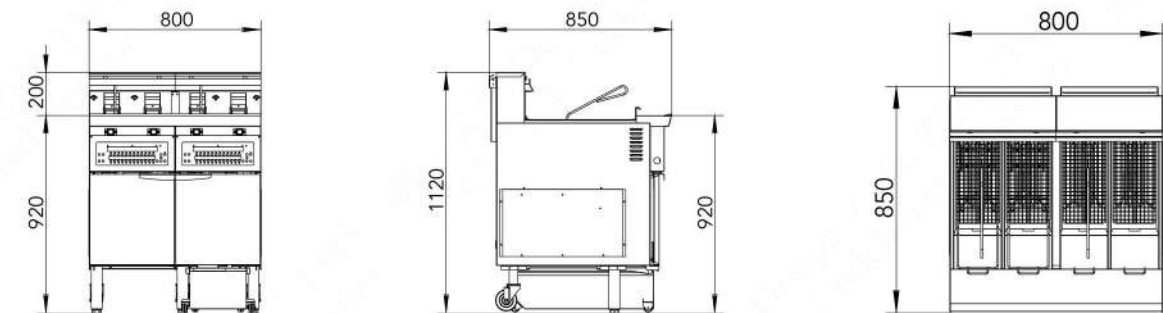

Model	Product Dim (WxDxH mm)	Power(W)	Voltage(V)	Capacity(L)	Net Weight(KG)
DZ-18-S	495x950x(920+200)	17.5	AC 380	35	164
DZ18-2-S	990x950x(920+200)	34.5	AC 380	35x2	243
DZ7-2-S	400x850x(920+200)	14.5	AC 380	10x2	100
DZ7-3-S	600x850x(920+200)	21.5	AC 380	10x3	134
DZ7-4-S	800x850x(920+200)	28.5	AC 380	10x4	173

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SMOKELESS

Deep Fryer

Dual Tanks & Dual Baskets



- Built-in Fume Purification
Internal circulation system for smokeless operation
- Smart Control
Bilingual interface, 10-program memory presets
- Auto Lift
Auto-lift system for baskets – labor-saving & efficient
- Precise Heating
Delivers uniform heat distribution with electronically controlled temperature variance for precise and stable performance.
- Dual Tanks
Cook two foods simultaneously without flavor mixing
- Unique Detachable Design
Heating tubes can be lifted and oil tanks easily removed for simple maintenance and cleaning
- Safety Protection Design
Power-off protection when the heating element is lifted.



KD-WYZ-2



KD-WYZ-2

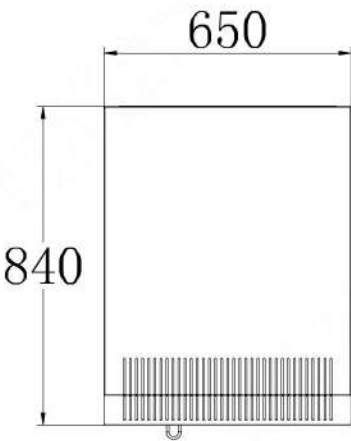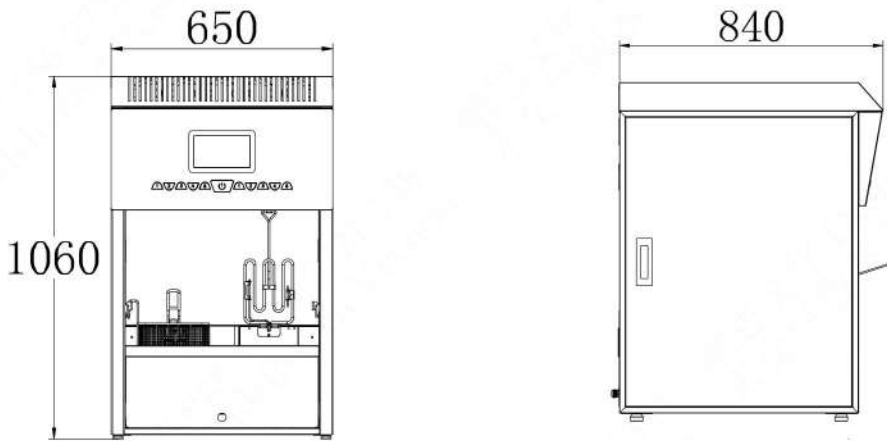

Model	Product Dim (WxDxH mm)	Power(KW)	Heating power (KW)	Voltage(V)	Capacity(L)	Net Weight(KG)
KD-WYZ-2	650x840x1060	6.5	3kWx2	10L	AC 220V	165

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

AUTO DOUBLE-Sided Griddle

Single/Double/Triple Head

- Smart Control
Bilingual interface with multi-stage menu settings and storage.
 - Auto Dual-Side Grill
Top plate auto-lift system with adjustable gap control
 - Efficient Heating
Independent top & bottom heating with precise temperature control for consistent results.
- Safe & Easy
Auto-lift safety feature, removable oil tray for easy maintenance
 - USB Menu Import
USB interface for centralized menu updates



ZJL-01






ZJL-02






ZJL-03

ZJL-01

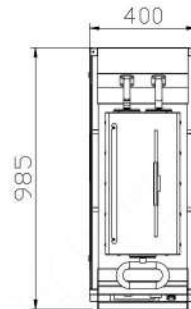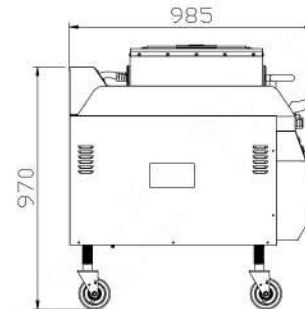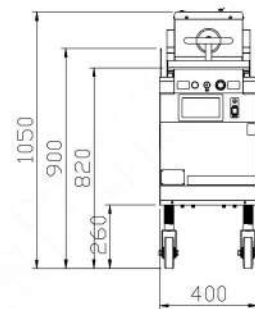

ZJL-03

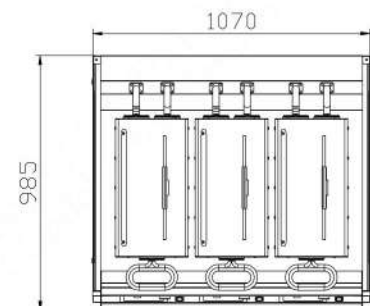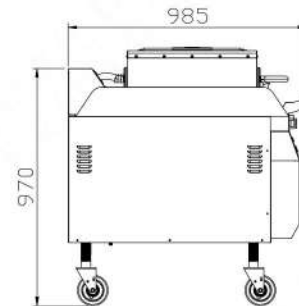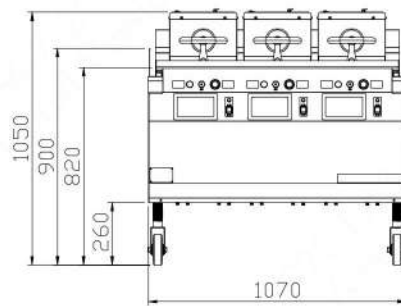

Model	Product Dim (W×D×H mm)	Upper Plates	Power (KW)	Voltage (V)	Net Weight (KG)
ZJL-01	400×985×970	1	8.85kW	AC 380V	209
ZJL-02	735×985×970	2	17.7kW	AC 380V	372
ZJL-03	1070×985×970	3	26.55kW	AC 380V	537

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

AUTOMATIC

Dumpling Fryer

Single/ Double Tank

- One-Touch Start
Automated heating, water supply, and temp-control.
- Precise Water Control
High-performance solenoid valve ensures steady flow
- Compact Footprint
Space-saving design for kiosks and small chain kitchens
- Even Heating Pot
Composite heating plate for uniform heat
- Easy to Use & Maintain
SUS304 stainless steel body for simple cleaning




JZ-1




JZ-2

JZ-1

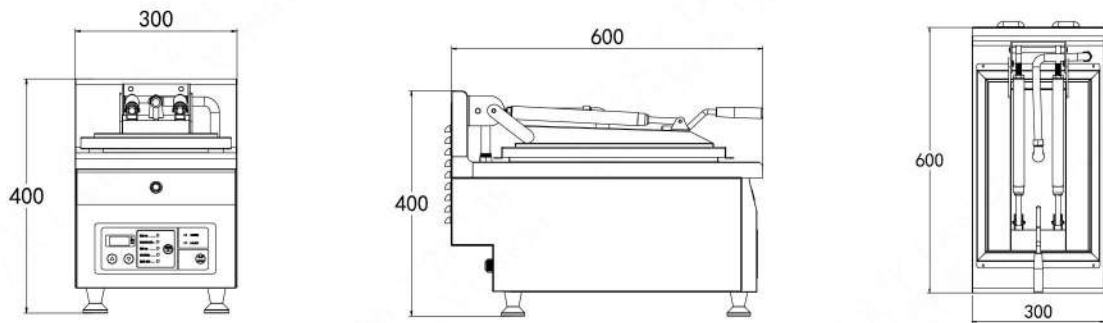

JZ-2

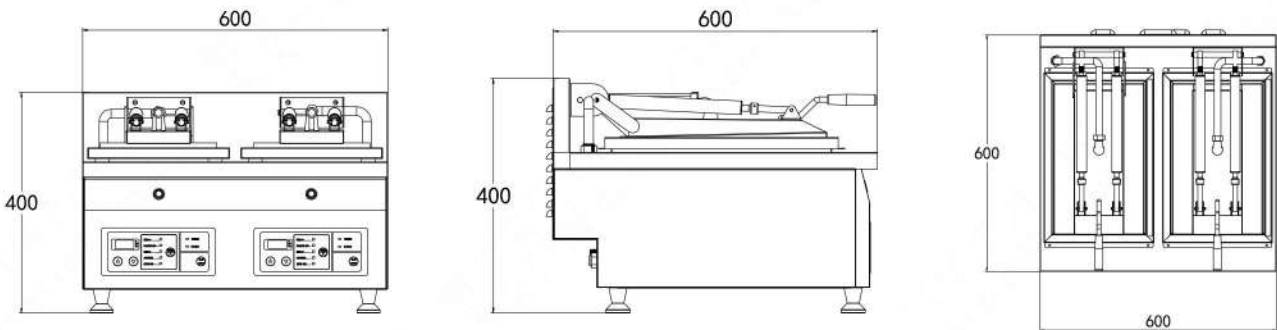

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Net Weight (KG)
JZ-1	300×600×400	3	AC220V	28
JZ-2	600×600×400	6	AC220V	53

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

MICROWAVE

Speed Oven

Microwave + High-Speed Hot Air Circulation

- Hybrid Heating System
Microwave + high-speed hot air for fast, even heating
 - 7" HD Touchscreen
Bilingual interface with customizable multi-menu modes
 - Intelligent Temperature Control
High-precision sensors ensure accurate heat and timing
- Efficient Fume Management
Built-in grease filtration for easy maintenance and compliant emissions
 - Easy-Clean Chamber
Stainless steel interior with smooth surfaces and no dead corners

Optional Colors





WK-D



WK-S

WK-D

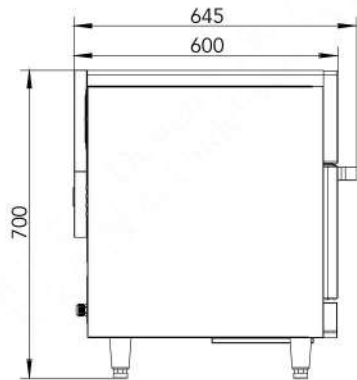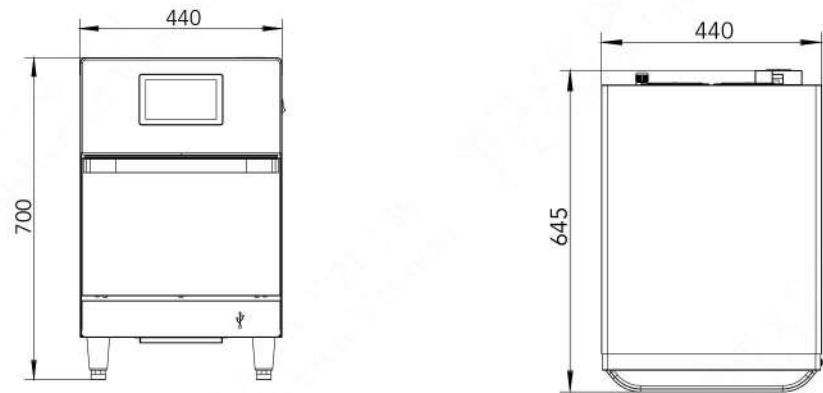

Model	Product Dim (W×D×H mm)	Power (KW)	Microwave power (KW)	Hot Air Power (KW)	volume (L)	Net Weight (KG)
WK-D	440×645×700	3.5	1.5	3	17	62
WK-S	440×645×700	6.3	3	5.5	17	76.5

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

ULTRA-FAST

Smokeless Grill


Heats up to 1000°C in Seconds - Smokeless & Efficient Grilling

- Rapid Heating System
Special heating elements heat up to over 1000 °C within 60 seconds.
 - Three-Level Power Adjustment
Adapts to different ingredients and cooking needs
 - Independent Temperature Zones
Each zone controlled separately for simultaneous multi-item grilling
- Built-in Water & Oil Management
Integrated drip tray and water supply prevent dry burning and oil overflow
 - Compact & Easy to Clean
Compact stainless steel build for easy daily maintenance



JKL-1

JKL-1

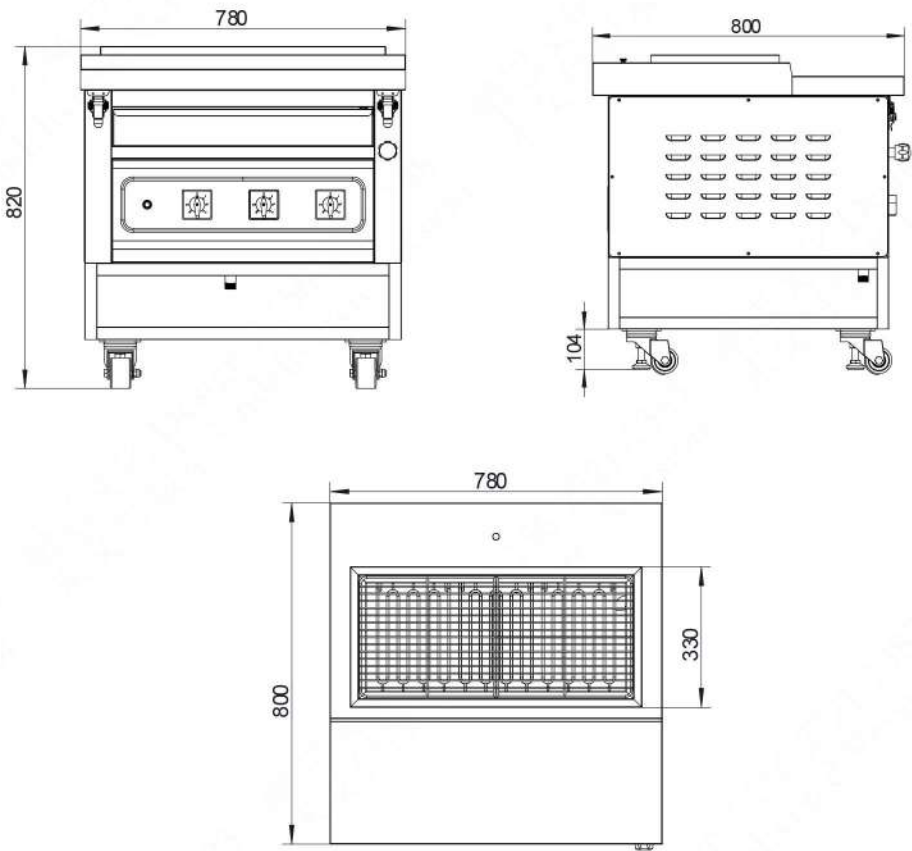

Model	Product Dim (W×D×H mm)	Power (KW)	Microwave power (KW)	Voltage (V)	Net Weight (KG)
JKL-1	780×800×800	4kW×3	3-level power × 3 temperature zones	AC 380V	200

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SMART


Noodle Boiler

Multi-Zone Precise Boiling - Efficient & Continuous Noodle Cooking


- Self-developed multifunction control system
- Low-water & dry-burn protection
- Automatic overflow protection
- Independent boiling function
- USB interface for convenient menu data transfer



ZM70-9

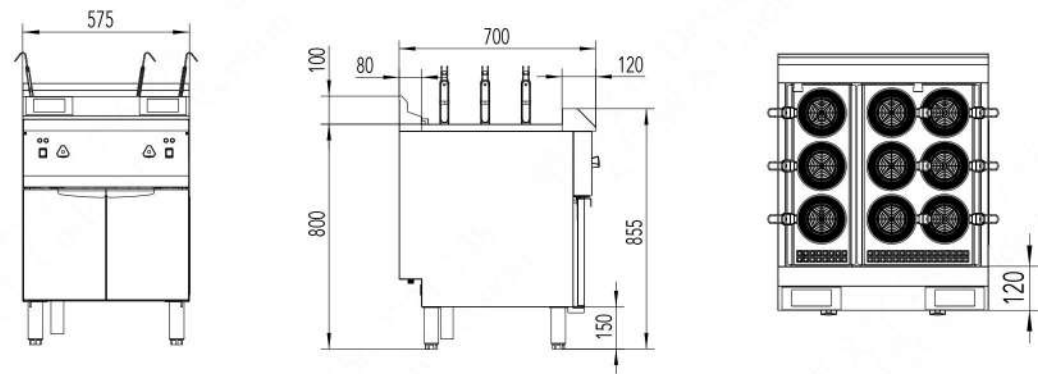

ZM70-6S

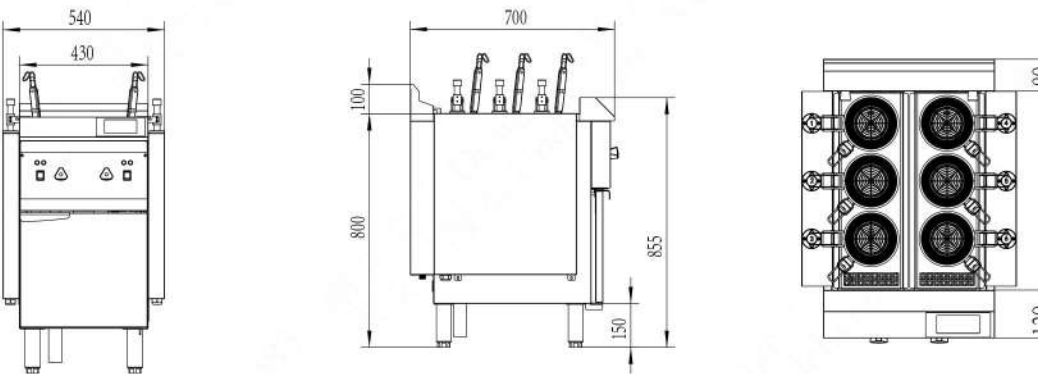

ZM70-3



ZM70-6



ZM70-9



ZM70-6S

Model	Product Dim (W×D×H mm)	Tank Size (W×D×H mm)	Power (KW)	Cooking Heads	Voltage (V)	Control	Net Weight (KG)
ZM70-3	239×700×(800+100)	166×500×236	6	3	AC 380V	Independent	23
ZM70-6	430×700×(800+100)	L/R:166×500×236	6+6	6	AC 380V	Dual Tank Dual Control	38
ZM70-9	575×700×(800+100)	L:166×500×236 R:311×500×236	6+12	9	AC 380V	Dual Tank Dual Control	54
ZM70-6S	540×700×(800+100)	L/R:166×500×236	6+6	6	AC 380V	Dual Tank Dual Control	38

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SOUP

Boiler Series

Stock Pot Range/Soup Holding Range

- Large capacity with adjustable power
- High-power electromagnetic heating for rapid, stable boiling
- Thickened composite bottom for more efficient and even heat transfer
- Proprietary 8-level power control panel for intuitive operation




TL135




TL90



TL135

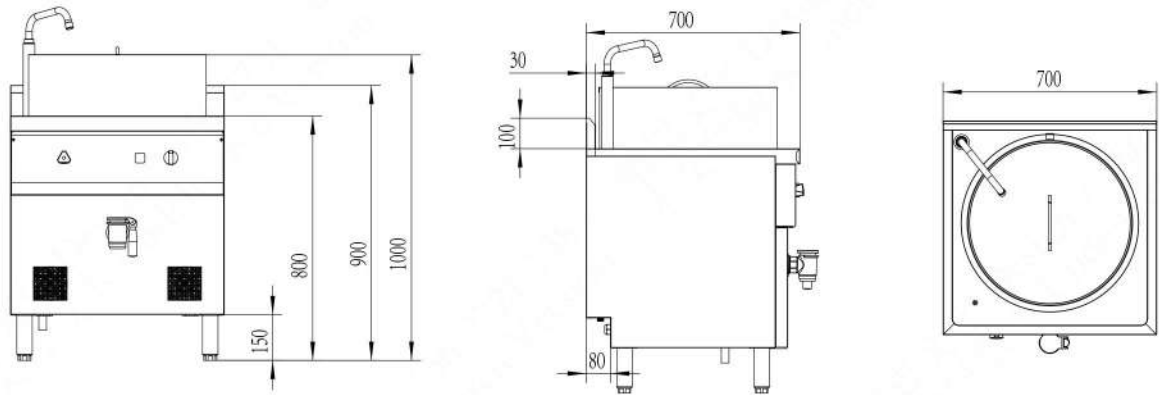

TL90

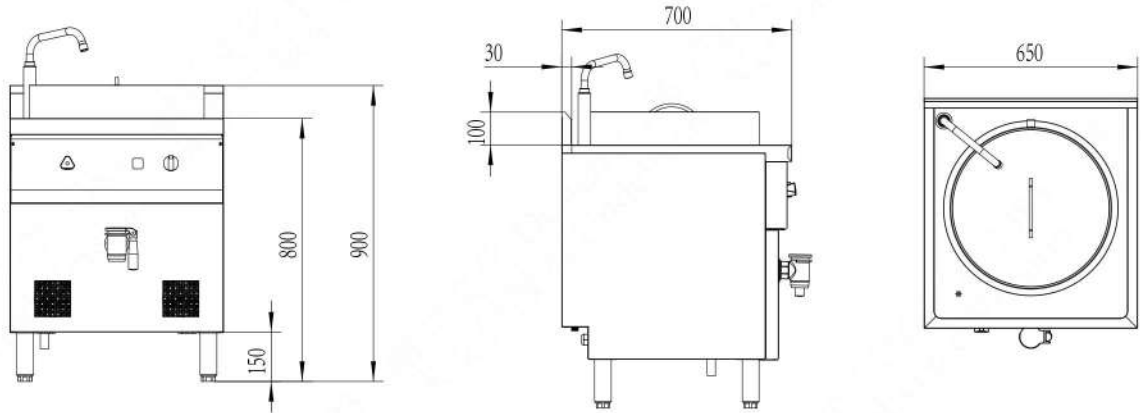

Model	Product Dim (W×D×H mm)	Power (W)	Voltage (V)	Tank Size (W×D×H mm)	Capacity (L)	Net Weight (KG)
TL135	700×700×(800 + 100)	12	AC 380V	Ø550×600 mm	5–135	68
TL90	650×700×(800 + 100)	6	AC 380V	Ø500×500 mm	5–90	50

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SMART ELECTRIC

Steam Cabinet

High-Efficiency Steam - Fast & Fresh Cooking Performance

- Intelligent Temperature Control
Precise time and temperature management for consistent results
- Anti-Drip Design
Top condensation device prevents water from dripping onto food
- Safety Protection
Features dry-boil, overheat, and leakage safeguards
- Independent Boiler Steam System
Preserves freshness and ensures safe, efficient cooking
- Proprietary 5-Inch Touch Screen
Supports counting, multi-menu cooking, and fault alerts



DZG-4









DZG-8



DZG-12



DZG-4

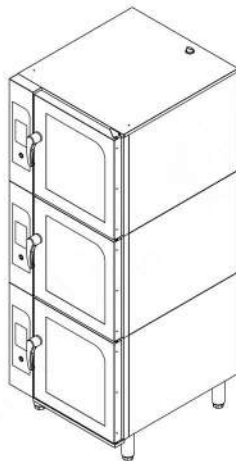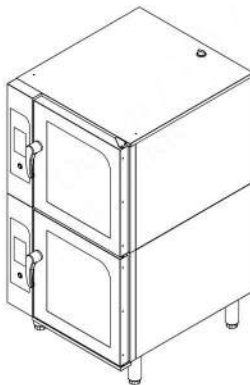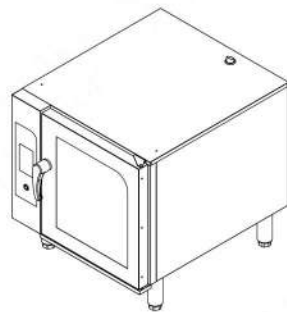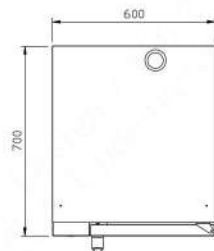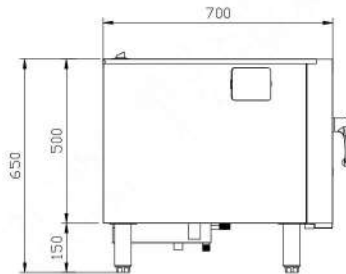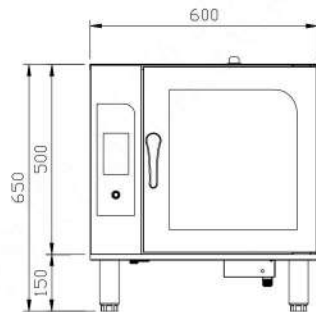

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Number of Slots	Net Weight (KG)
DZG-4	600×700×650	6	AC 380V	4	68
DZG-8	600×700×1150	12	AC 380V	8	85
DZG-12	600×700×1650	18	AC 380V	12	108

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

RICE COOKER


Machine

Single/Double/Triple Layer


- Multi-Layer Heating System
Single, double, or triple layers to meet different output needs
 - Proprietary 5-Inch Touch Screen
Intuitive interface with adjustable gelatinization temperature for precise rice texture
 - Multiple Texture Modes
Customize softness, medium, or firm rice by setting the gelatinization level
- Durable Construction
SUS430 stainless-steel housing with reinforced rails for long-term reliability
 - Safe & Stable
High-temperature insulation design ensures consistent and secure operation



ZFJ-1

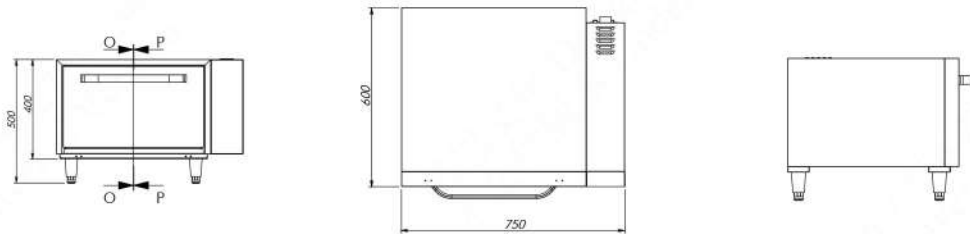

ZFJ-3

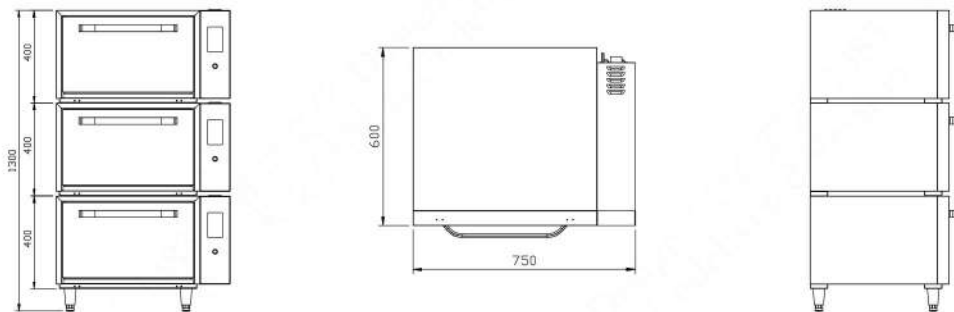

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Single-Layer Capacity	Net Weight (KG)
ZFJ-1	750×600×500	5.4	380V	3–5KG Rice	50
ZFJ-2	750×600×900	10.8	380V	3–5KG Rice / Layer	98
ZFJ-3	750×600×1300	16.2	380V	3–5KG Rice / Layer	147

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

VERTICAL


Cabinet Warming

Single Access/Dual Access/Flip Door/Half-Height Models


- Precision Temperature Control
Digital temperature display system with $\pm 2^{\circ}\text{C}$ accuracy
 - Efficient Hot-Air Circulation
Independent dual-air channel design for rapid reheating
 - Double-Layer Insulated Glass Door
Visible display with anti-fog coating for optimal presentation
- Auto-Rebound Door
Improves retrieval efficiency and reduces heat loss
 - Multiple Configurations Available
Single/double door, flip-up, half-height, or multi-layer options
 - Dual-Layer Insulation
Thickened PU insulation for energy saving and reduced heat loss



2ZbR01-S

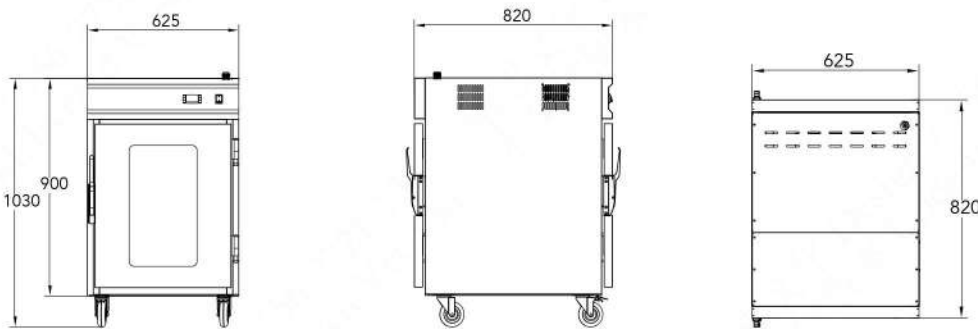

4ZbR01-S

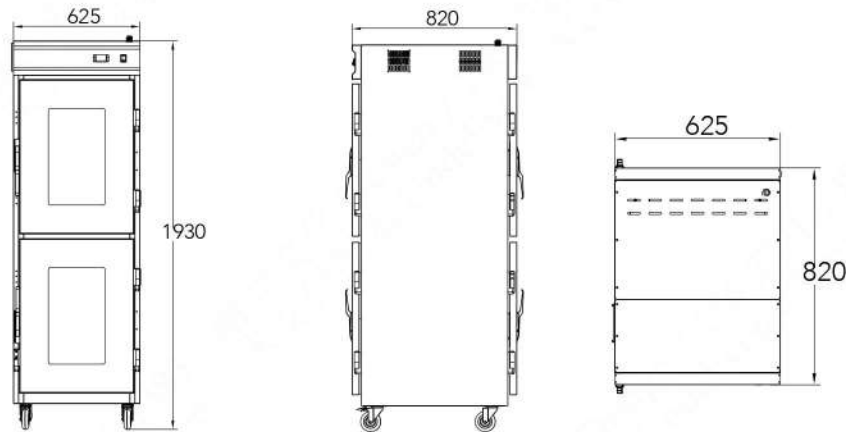

Model	Product Dim (W×D×H mm)	Inner Chamber Dim (W×D×H mm)	Power (KW)	Voltage (V)	Volume (L)	Net Weight (KG)
4ZbR01-S	625×820×1930	525×710×1560	2.5	AC220V	14	91
4ZbR02-S	625×820×1930	525×710×1560	2.5	AC220V	14	114.5
4ZbR03-S	625×820×1930	525×710×1560	2.5	AC220V	14	111
2ZbR01-S	625×820×1930	525×710×675×2	2.5	AC220V	12	125.5
2ZbR02-S	625×820×900	525×710×675	1.25	AC220V	6	60
2ZbR03-S	625×820×1030	525×710×675	1.25	AC220V	6	62.5

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

PROOFING Cabinet

Single Door/Double Door

- Constant Temperature Control
Intelligent system ensures optimal proofing curve
 - Hot Air Circulation
Evenly distributed air channels maintain consistent fermentation temperature, preventing local overheating
- Large-Capacity Multi-Layer Structure
Compatible with multiple proofing racks
 - Compact Space-Saving Design
Ideal for kitchens and bakery counters with limited space



DFJ-1




SFJ-2

DFJ-1



SFJ-2

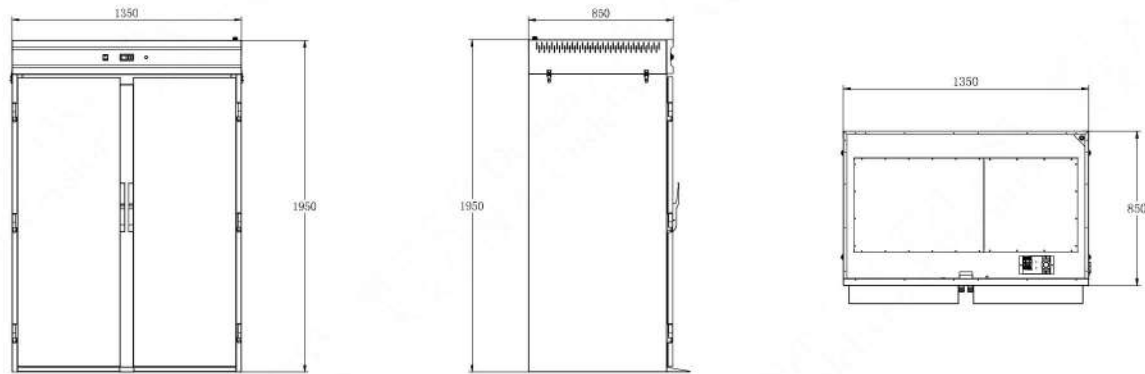

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Net Weight (KG)
DFJ-1	670×850×1950	1	380V	95
SFJ-2	1350×850×1950	1.5	380V	155

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

MULTI-FUNCTION

Countertop Cooker

- 3-in-1 Function Modes
Switch between steaming, boiling, and warming for versatile food preparation
- Precise Temperature Control
Adjustable range with stable, energy-efficient performance
- Countertop or Built-In Installation
Flexible setup to fit various kitchen layouts
- Fast & Even Heating
Cast-aluminum heating plate for quick heating and uniform temperature
- Full Stainless-Steel Housing
Durable, hygienic, and easy to clean




SYB-01




SYB-01D

SYB-01

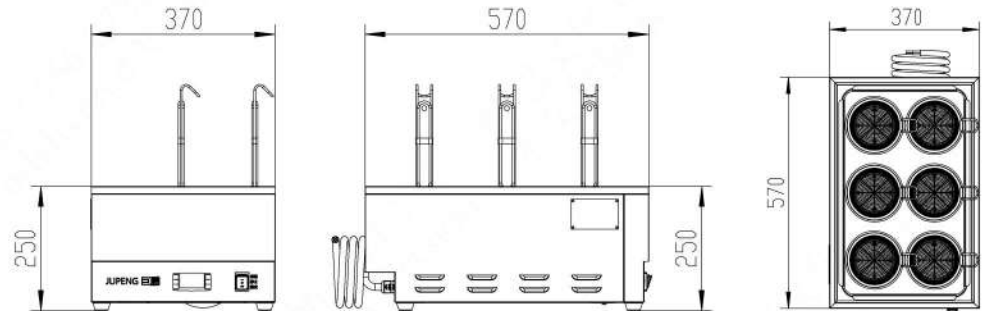

SYB-01D

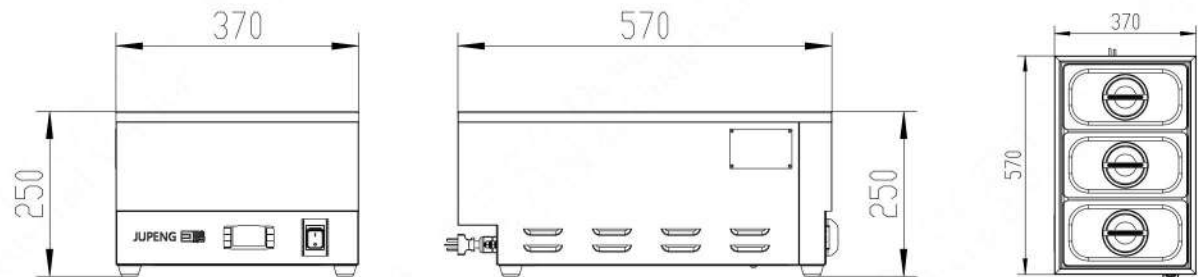

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Modes	Net Weight (KG)
SYB-01	370×570×250	1	AC220V	Heat Preservation	7.6
SYB-01D	370×570×250	4	AC220V	Steaming / Heat Preservation	12.5

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

HOT AIRDISH

Cabinet Warmer

Warm Plates, Better Meals- Preserve Serving Temperature Perfectly

- Electronic Temperature Control
±3°C accuracy, ensures uniform dish temperature
 - Efficient Hot-Air Circulation
Built-in axial fan for even heating on all levels
 - Double-Layer Insulation Structure
Thickened insulation reduces energy consumption
- Adjustable Stainless Steel Interior Racks
Multi-layer structure adaptable to different utensil sizes
 - Double Sliding Door Design
Smooth operation for quick loading and unloading of dishes





FRG-03 Warming Dish Cabinet



FRG-1Z Lift & Warming Dish Cabinet



FRG-03

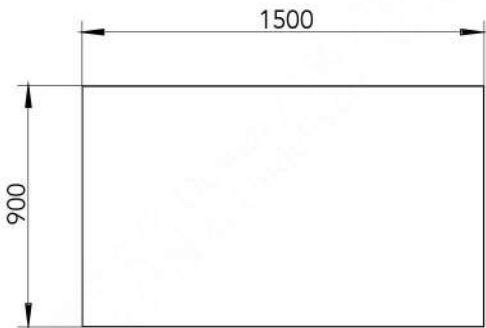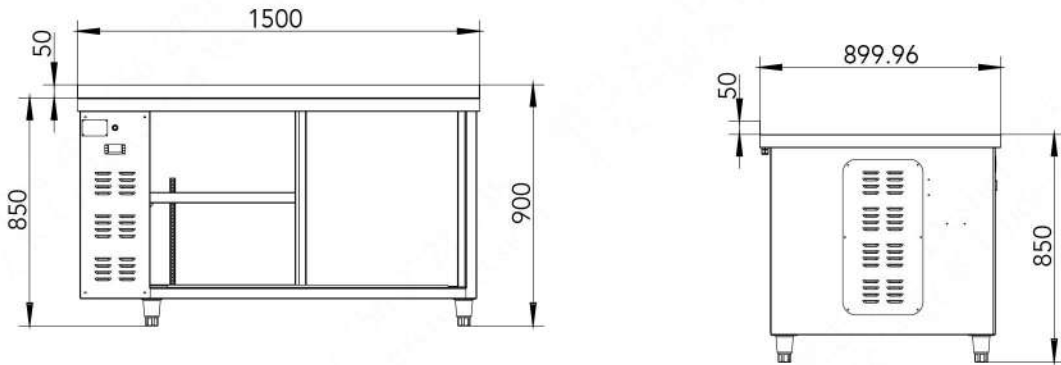

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Temperature Range (°C)	Net Weight (KG)
FRG-03	1500×700×800	2.05	AC220V	30–80	120
FRG-1Z	1500×700×800	2.05	AC220V	30–80	120

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

SMART THAWING

Cabinet

6-Layer/10-Layer Models


- Multi-Stage Program Control
Supports 8 defrost programs, each with 8 temperature & humidity steps
- Central Touchscreen Control
7" touch screen, bilingual interface, intuitive operation
- Precise Temp & Humidity System
Enables efficient, gradual low-temperature defrosting, preserving nutrients
- High-Efficiency Cooling & Heating Modules
Fast and responsive hot/cold switching
- Casters & Fixed Feet
Mobile yet stable, convenient for workstation repositioning




JDB-3-S

JD-2-S

JDB-3-S

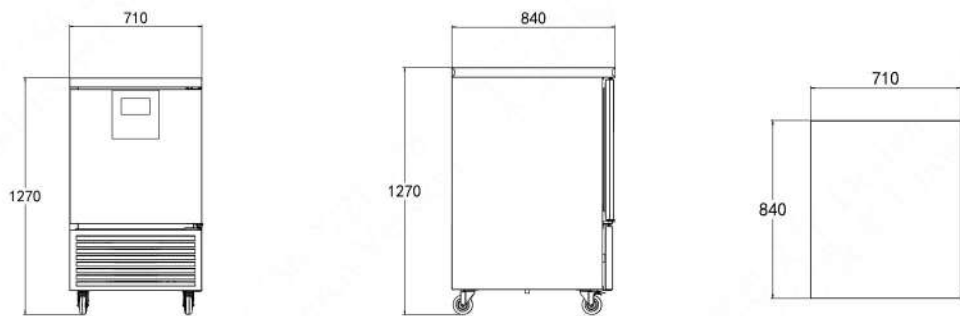

JD-2-S

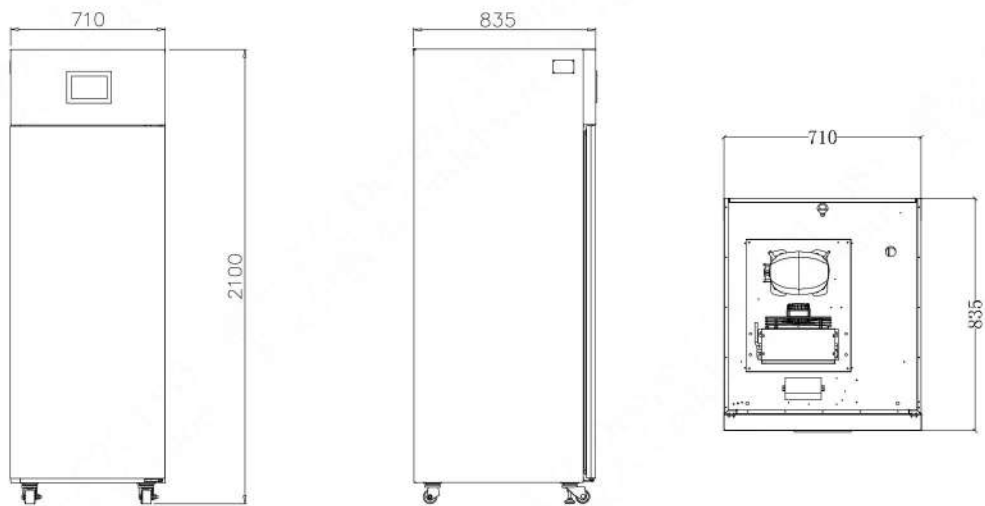

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Net Weight (KG)
JDB-3-S	710×840×1270	1.85	AC220V	75
JD-2-S	710×835×2090	2.8	AC220V	150

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

AUTOMATIC

Breading Table

Single/Double Bowl

- Automatic Flour Sifting
Processes ≥ 7 kg of dry powder per minute, prevents clumping
- Ergonomic Breeding Trough
Easy to operate, ergonomically designed
- Food-Grade SUS304 Contact Areas
Hygienic, durable, and easy to clean
- Single / Double Station Options
Flexible configuration for different workloads
- Stable Stainless-Steel Structure
Adjustable feet ensure stability on various floor conditions




GF-01-S




GF-02-S

GF-01-S

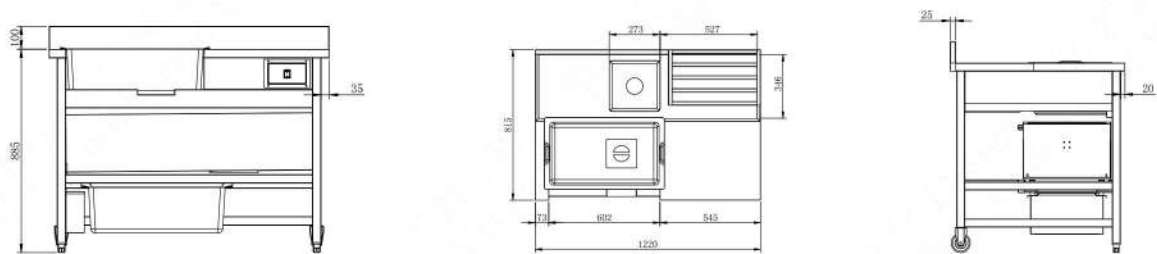

GF-02-S

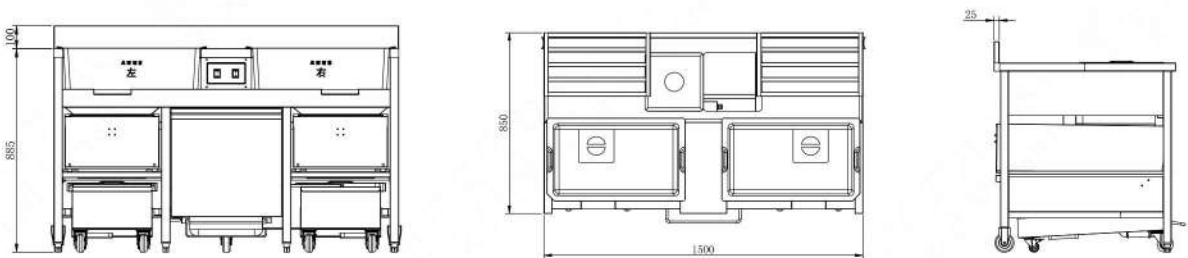

Model	Product Dim (W×D×H mm)	Power (KW)	Voltage (V)	Bowl Size (W×D×H mm)	Net Weight (KG)
GF-01-S	1220×815×(885+100)	0.25	AC220V	590×340×200	91
GF-02-S	1500×815×(885+100)	0.5	AC220V	(590×340×200)×2	114.5

*Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

