

# COTTURA



2025 Products  
**CATALOGUE**

**COTTURA**  
group

# Catalogue

## *Fryer Series 01*

Gas Fryer.....	02
Electric Fryer.....	05

## *Gas Range Series 06*

Gas Range.....	07
Gas Range/Griddle Combos.....	10
Gas Range/Griddle/Salamander Combos.....	13

## *Heavy Duty Series 14*

Gas Countertop Hotplates.....	15
Gas Countertop Griddle.....	17
Gas Thermostatic Griddle.....	18
Gas Countertop Charbroiler.....	19

## *Medium Duty Series 21*

Gas Countertop Hotplates.....	22
Gas Countertop Griddle.....	23
Gas Thermostatic Griddle.....	25
Gas Countertop Charbroiler.....	27

## *Standard Series 29*

Gas Countertop Griddle.....	30
Gas Countertop Charbroiler.....	32

## *Convection Oven 34*

Gas Convection Oven.....	34
Convection Oven.....	36

# GAS FRYER





## HFRF-90 / HFRF-120 HFRF-150 Gas Fryer

### Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs can be removed when packing to reduce transportation cost.
- Adjustable thermostat from 200°F-400°F.

#### HFRF-90

Size(W\*D\*H): 395X765X1162mm  
 Size(W\*D\*H): 15.57"X30.12"X45.75"  
 N.W. : 61kg G.W. : 73kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 2.367 / LPG: 1.02

Capacity: 18.5-23L  
 Quantity of Fryer Baskets: 2  
 Quantity of Tube Burners: 3  
 Power(BTU): 30,000X3

#### HFRF-120

Size(W\*D\*H): 395X765X1162mm  
 Size(W\*D\*H): 15.57"X30.12"X45.75"  
 N.W. : 66kg G.W. : 78kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 3.156 / LPG: 1.36

Capacity: 21.3-25L  
 Quantity of Fryer Baskets: 2  
 Quantity of Tube Burners: 4  
 Power(BTU): 30,000X4

#### HFRF-150

Size(W\*D\*H): 533X765X1162mm  
 Size(W\*D\*H): 21"X30.12"X45.75"  
 N.W. : 75kg G.W. : 93kg Gas  
 consumption(m<sup>3</sup>/h): NG: 3.946 /  
 LPG: 1.7

Capacity: 31-37L  
 Quantity of Fryer Baskets: 2  
 Quantity of Tube Burners: 5  
 Power(BTU): 30,000X5



\* All above parameters for reference only, take practicality as standard.



## HFRF-90-ES/HFRF-120-ES/ HFRF-150-ES

Gas Energy-Star Fryer

### Features

- ENERGY STAR®, ETL safety and ETL sanitation certified.
- Robertshaw brand key components.
- Millivolt thermostat control adjusts from 200°F to 400°F.
- The temperature of the ledge and panel is cool.
- 6 inch adjustable legs, casters available.

#### HFRF-90-ES

Size(W\*D\*H): 394X762X1243mm  
Size(W\*D\*H): 15.5"X30.02"X48.94"  
Capacity: 35LBS

Quantity of Fryer Baskets: 2  
Quantity of Tube Burners: 3  
Power(BTU): 65,000

#### HFRF-120-ES

Size(W\*D\*H): 394X762X1243mm  
Size(W\*D\*H): 15.5"X30.02"X48.94"  
Capacity: 45LBS

Quantity of Fryer Baskets: 2  
Quantity of Tube Burners: 4  
Power(BTU): 84,000


#### HFRF-150-ES

Size(W\*D\*H): 533X762X1243mm  
Size(W\*D\*H): 20.98"X30.02"X48.94"  
Capacity: 60LBS

Quantity of Fryer Baskets: 2  
Quantity of Tube Burners: 5  
Power(BTU): 105,000



\* All above parameters for reference only, take practicality as standard.

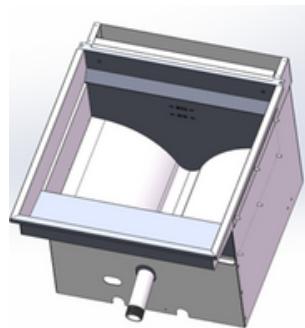

## HFRF-120-K/HFRF-150-K

### Gas Open Pot Fryer

#### Features

- ETL safety and ETL sanitation certified.
- Temperature range adjusts from 200°F to 400°F.
- The control is at right hand side, easy to access.
- The burner is diffusion burner, the flame is stable and do not backfire.
- The bottom of tank is round, easy to clean.
- Insulation on the two side panels and the front of tank, the temperature rising of wall and floor are low.

#### HFRF-120-K




Size(W\*D\*H): 394X763.5X1164.4mm  
 Size(W\*D\*H): 15.51"X30.06"X45.84"  
 Capacity: 40LBS

Quantity of Fryer Baskets: 2  
 Power(BTU): 100,000(NG)/75000(LPG)  
 Distance from drain valve to floor:46CM

#### HFRF-150-K

Size(W\*D\*H): 534X766.4X1162.3mm  
 Size(W\*D\*H): 21.02"X30.17"X45.76"  
 Capacity: 50LBS

Quantity of Fryer Baskets: 2  
 Power(BTU): 130,000(NG)/95,000(LPG)  
 Distance from drain valve to floor:46CM

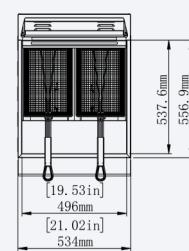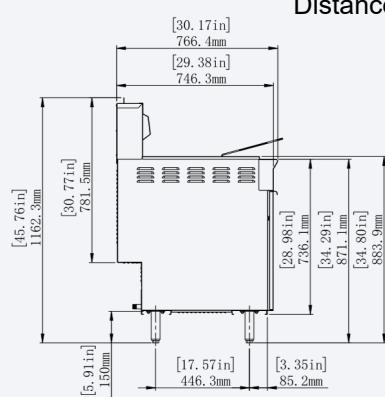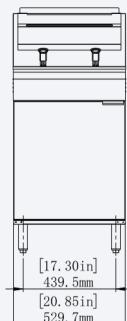

\* All above parameters for reference only, take practicality as standard.



## HFEF-11KW/HFEF-14KW Electric Fryer

### Features

- Two sets of heating element, 7KW per set, total is 14KW.
- Flat heat element, fast heating.
- Heating element can be lift-up, easy for cleaning.
- Front control, easy to access and convenient for operation.

#### HFEF-11KW




Dimensions: 394×761×1134mm  
Power: 11KW  
Volts: 208V/60HZ/3PH

Capacity: 23L  
Temperature Range: 200-400F

#### HFEF-14KW

Dimensions: 394×761×1134mm  
Power: 14KW  
Volts: 240V/60HZ/3PH

Capacity: 23L  
Temperature Range: 200-400F

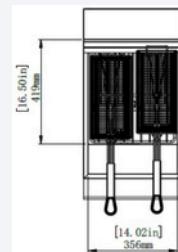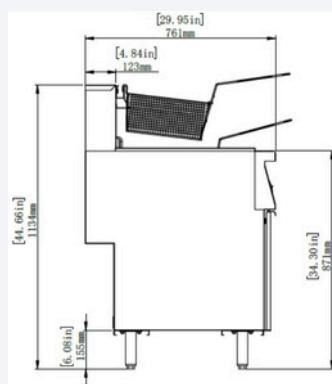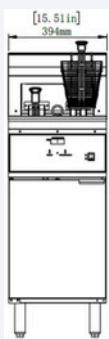

\* All above parameters for reference only, take practicality as standard.

# Gas Range





## HFSO-24


### Gas Range

## Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 609.4X829.7X1532.3mm  
 Size(W\*D\*H): 23.99"X32.67"X60.33"  
 N.W. : 129kg    G.W. : 161.5kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 3.946 / LPG: 1.699

Quantity of Burners: 4  
 Quantity of Controls: 5  
 Quantity of Racks: 2  
 Burner Power(BTU): 30,000X4  
 Oven Power(BTU) : 30,000X1  
 Total Power(BTU): 150,000

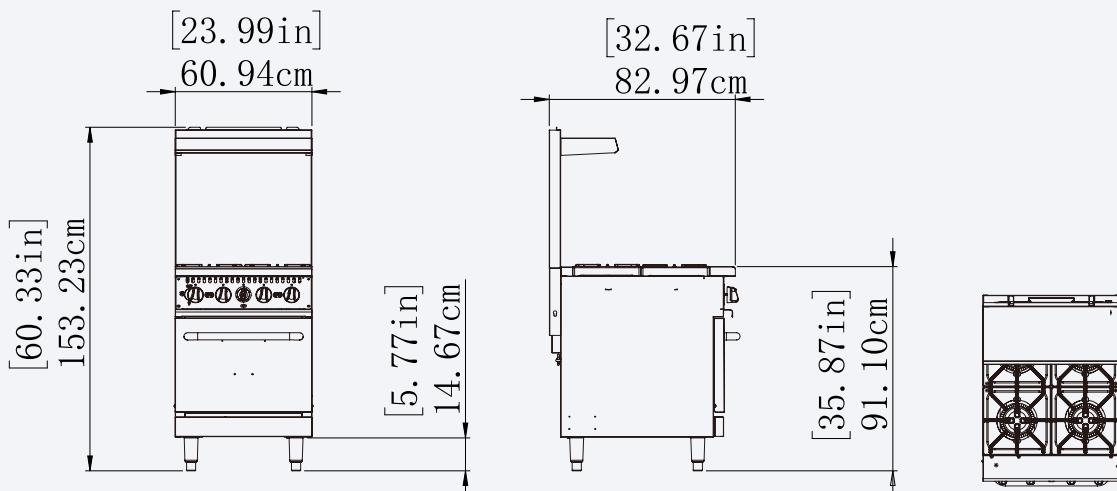

\* All above parameters for reference only, take practicality as standard.




## HFSO-36 GasRange

### Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 908.8X829.7X1532.9mm  
 Size(W\*D\*H): 35.78"X32.67"X60.35"  
 N.W. : 170kg G.W. : 204kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 5.524 / LPG: 2.379

Quantity of Burners: 6  
 Quantity of Controls: 7  
 Quantity of Racks: 2  
 Burner Power(BTU): 30,000X6  
 Oven Power(BTU): 30,000X1  
 Total Power(BTU): 210,000

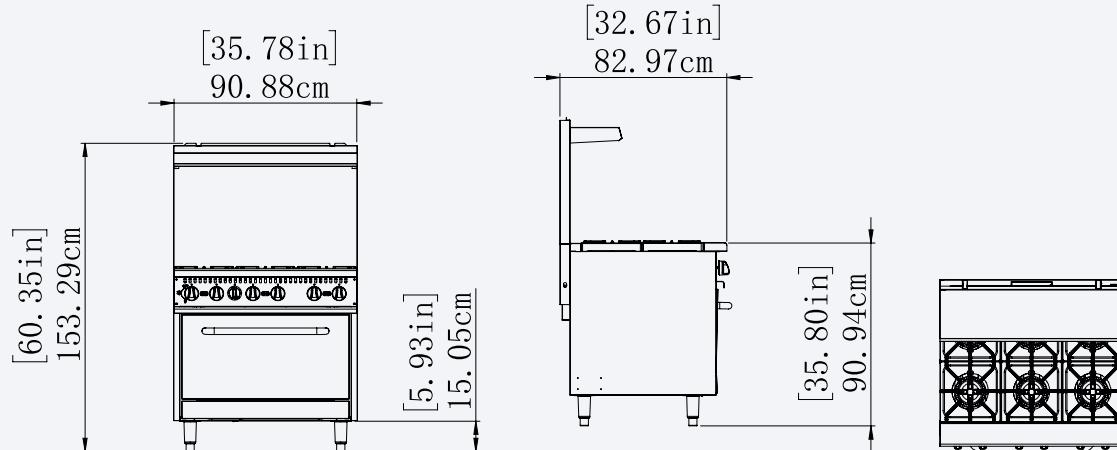

\* All above parameters for reference only, take practicality as standard.




## HFSO-60 GasRange

### Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 1524X828.7X1532.9mm  
 Size(W\*D\*H): 60"X32.63"X60.35"  
 N.W. : 290.5kg G.W. : 348kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 9.469 / LPG: 4.079

Quantity of Burners: 10  
 Quantity of Controls: 12  
 Quantity of Racks: 4  
 Burner Power(BTU): 30,000X10  
 Oven Power(BTU): 30,000X2  
 Total Power(BTU): 360,000

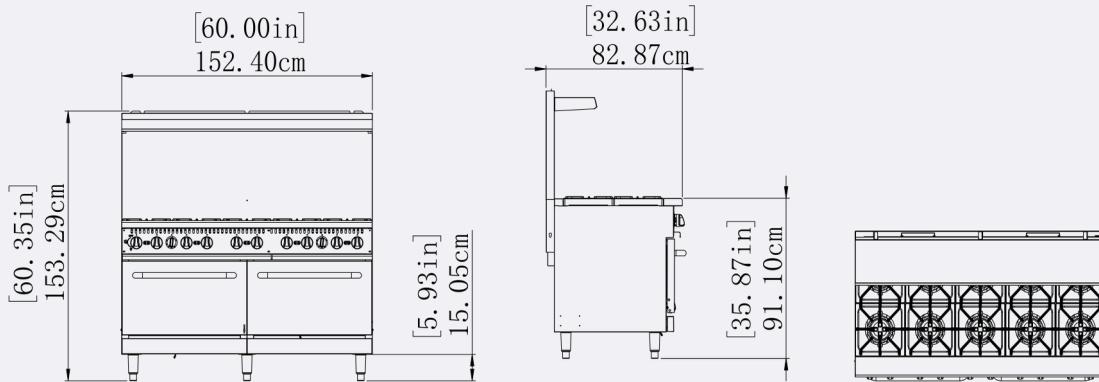

\* All above parameters for reference only, take practicality as standard.



## HFSO-36-G12


### GasRange/Griddle Combos

## Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 914.4X827.5X1532.9mm  
 Size(W\*D\*H): 36"X32.58"X60.35"  
 N.W. : 187.5kg G.W. : 225kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 4.472 / LPG: 1.926  
 Plate Thickness:0.75"(19mm)

Quantity of Burners: 4  
 Quantity of Controls: 5  
 Quantity of Racks: 2  
 Burner Power(BTU): 30,000X4  
 Oven Power(BTU): 30,000X1  
 Griddle Power(BTU): 20,000X1  
 Total Power(BTU): 170,000

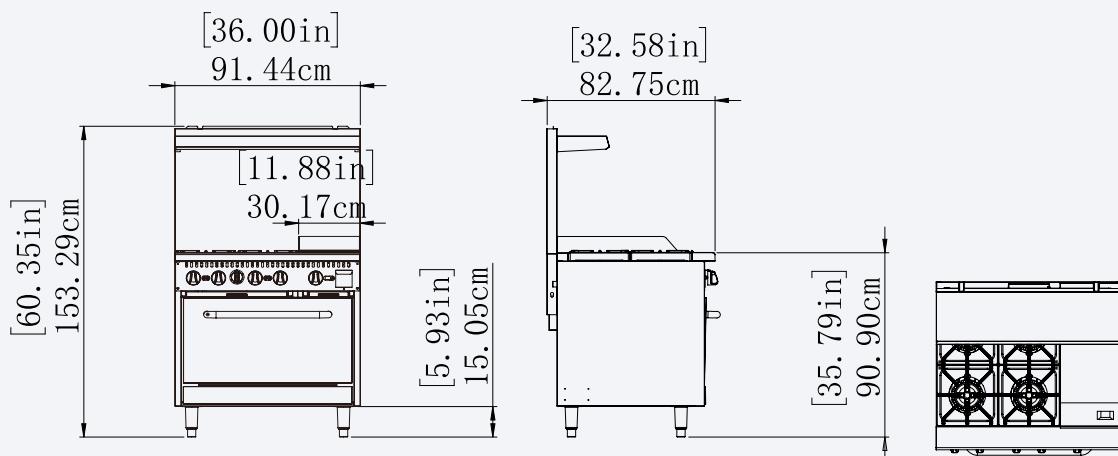

\* All above parameters for reference only, take practicality as standard.



## HFSO-36-G24


### GasRange/Griddle Combos

## Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 911.6X827.7X1532.9mm  
 Size(W\*D\*H): 35.89X"32.59"X60.35"  
 N.W. : 195kg G.W. : 231kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 3.42 / LPG: 1.473  
 Plate Thickness:0.75"(19mm)

Quantity of Burners: 2  
 Quantity of Controls: 5  
 Quantity of Racks: 2  
 Burner Power(BTU): 30,000X2  
 Oven Power(BTU): 30,000X1  
 Griddle Power(BTU): 20,000X2  
 Total Power(BTU): 130,000

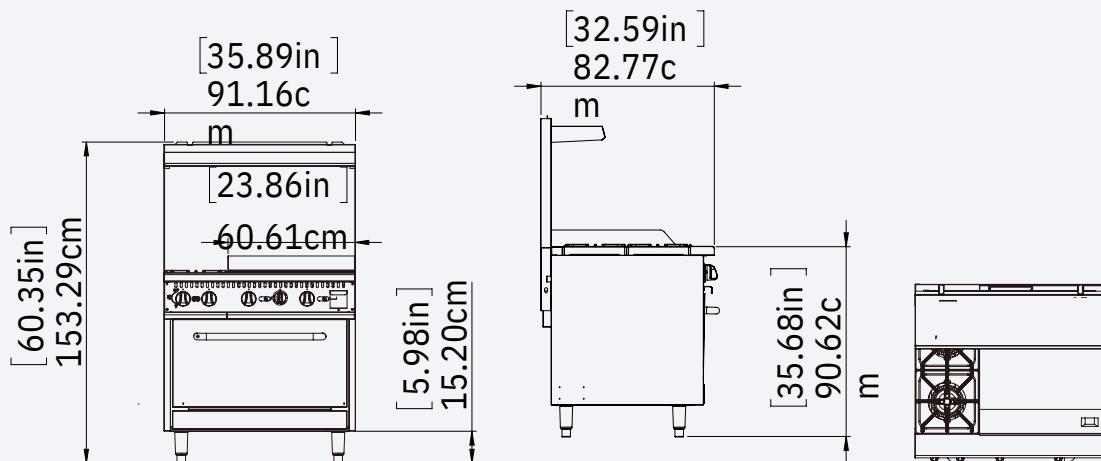

\* All above parameters for reference only, take practicality as standard.



## HFSO-60-G24


### GasRange/Griddle Combos

## Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 1518.4X827.1X1532.9mm  
 Size(W\*D\*H): 59.78"X32.56"X60.35"  
 N.W. : 312kg G.W. : 362kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 7.365 / LPG: 3.172  
 Plate Thickness: 0.75"(19mm)

Quantity of Burners: 6  
 Quantity of Controls: 10  
 Quantity of Racks: 4  
 Burner Power(BTU): 30,000X6  
 Oven Power(BTU): 30,000X2  
 Griddle Power(BTU): 20,000X2  
 Total Power(BTU): 280,000

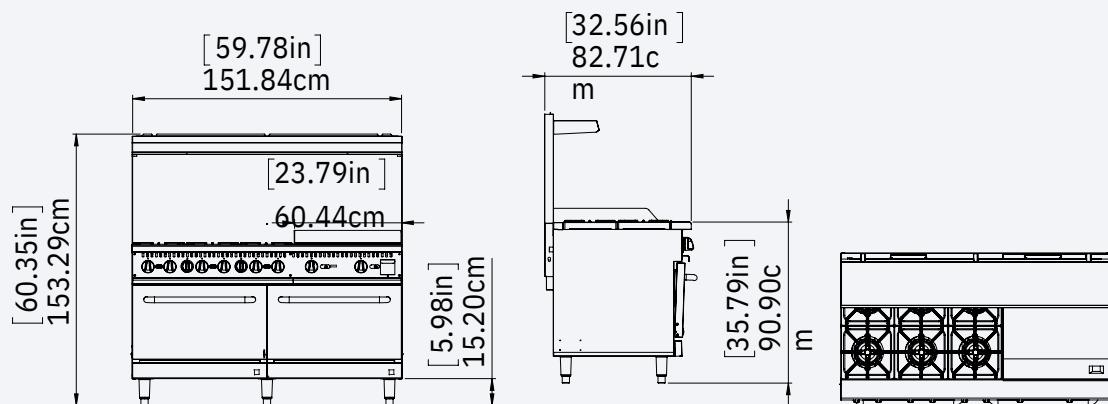

\* All above parameters for reference only, take practicality as standard.



## HFSO-60-GS24


### Gas Range/Griddle/ Salamander Combos

## Features

- Key components have CSA / ETL certificate.
- 6" adjustable stainless steel legs and back shelf can be removed when packing to reduce transportation cost.
- Equipped with regulator.
- Gas convert kit to exchange the gas type.
- Heavy-duty cast iron lift-off grates for easy cleaning.
- Adjustable thermostat from 250°F-550°F.

Size(W\*D\*H): 1524X829.2X1532.9mm  
 Size(W\*D\*H): 60"X32.65"X60.35"  
 N.W. : 331.5kg G.W. : 387kg  
 Gas consumption(m<sup>3</sup>/h):  
 NG: 7.26 / LPG: 3.127  
 Plate Thickness:0.75"(19mm)

Quantity of Burners: 6  
 Quantity of Controls: 11  
 Quantity of Racks: 4  
 Burner Power(BTU): 30,000X6  
 Oven Power(BTU): 30,000X2  
 Griddle/Salamander Power(BTU): 12,000X3  
 Total Power(BTU): 276,000

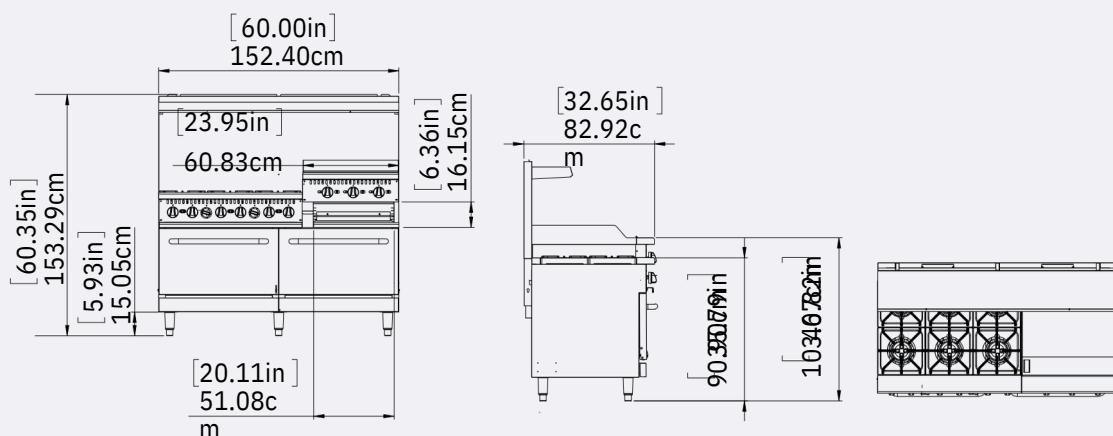

\* All above parameters for reference only, take practicality as standard.