



**COTTURA**  
b b b group

**CATALOG**





# REFRIGERATED CABINET

Premium GN 2/1 and GN1/1-Class A



Interior AISI 304 stamped liner,  
easy cleaning,  
GN compatible



**Digital controller**  
(Wi-Fi optional, remote monitoring  
available)



Rear air duct for uniform  
temperature distribution



LED lighting



Lock & key

R290 refrigerant, 100mm high-density  
insulation, energy efficient & environ-  
mentally friendly

Ventilated monoblock cooling system

Exterior AISI 201 or AISI 304 body  
stainless steel

Glass door, solid door, half door  
or drawers

Rounded inner corners for hygiene

Automatic defrost & evaporation

Self-closing & reversible doors

**Optional**  
60mm eco insulation version  
Foot pedal door opening  
Special voltage  
Class 5 climate class configuration



Adjustable feet or castors



Magnetic replaceable  
gasket



Foot pedal door opening (Optional)





## REFRIGERATED CABINET

Premium GN 2/1 and GN1/1-Class A  
100mm insulation



Model	GNH280TNV	GNH280BTV	GNH550TN-PT	GNH550BT-PT
Dimension (mm) (W x D x H)	448 x 735 x 2100		740 x 870 x 2100	
Temperature (°C)	-2 ~ +8	-22 ~ -18	-2 ~ +8	-22 ~ -18
Capacity (L)	280		525	
Shelves	3		3	
Energy Class	D	E	A	B
Climate Class	5	4	5	4
V/Hz	230/50		230/50	
Refrigerant	R290		R290	
Loading Qty/40HQ	67		39	
Extended Model	GNH280TNV-2 D GNH280TNVG	GNH280BTV-2 D GNH280BTVG	GNH550TNG-PT GNH550TN-PT-2D GNH530TN-PT	GNH550BTG-PT GNH550BT-PT-2D GNH530BT-PT
*	V- ventilated, non-monoblock PT- monoblock 2D- two drawers G- glass door			





Model	GNH1260TN-PT	GNH1260BT-PT
Dimension (mm) (W x D x H)	1480 x 870 x 2100	
Temperature (°C)	-2 ~ +8	-22 ~ -18
Capacity (L)	1260	
Shelves	6	
Energy Class	A	C
Climate Class	5	
V/Hz	230/50	
Refrigerant	R290	
Loading Qty/40HQ	15	
Extended Model	GNH1260TNG-PT GNH1260TN-PT-4D GNH1220TN-PT	GNH1260BTG-PT GNH1260BT-PT-4D GNH1220BT-PT
*	PT- monoblock 4D- four drawers G- glass door	

## REFRIGERATED CABINET

GN 2/1-Class B  
70mm insulation



Model	GNH510TN-PT	GNH510BT-PT
Dimension (mm) (W x D x H)	675 x 840 x 2045	
Temperature (°C)	-2 ~ +8	-22 ~ -18
Capacity (L)	525	510
Shelves	3	
Energy Class	B	C
Climate Class	5	
V/Hz	230/50	
Refrigerant	R290	
Loading Qty/40HQ	42	
Extended Model	GNH510TNG-PT	GNH510BTG-PT
*	PT- monoblock G- glass door	



Model	GNH1210TN-PT	GNH1210BT-PT
Dimension (mm) (W x D x H)	1360 x 840 x 2045	
Temperature (°C)	-2 ~ +8	-22 ~ -18
Capacity (L)	1195	1195
Shelves	6	
Energy Class	B	C
Climate Class	5	
V/Hz	230/50	
Refrigerant	R290	
Loading Qty/40HQ	21	
Extended Model	GNH1210TNG-PT	GNH1210BTG-PT
*	PT- monoblock G- glass door	



# REFRIGERATED CABINET

Standard Monoblock GN 2/1



GN 2/1 compatible guides



**Digital controller**  
Carel as standard, Copeland, Evco etc as optional, Wi-Fi function optional

Ventilated monoblock cooling, easy for maintenance

AISI 201 or AISI 304 body

Solid or glass doors

Rounded hygienic corners

Automatic defrost

LED lighting

Lock & key

Self-closing reversible doors

**Optional**  
Non-monoblock version  
Heating element in door frame  
Class 5 climate class configuration



Magnetic replaceable gasket



Casters (Optional)




Foot pedal door opening (Optional)



# REFRIGERATED CABINET

Standard Monoblock GN 2/1



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>Shelves</b>	
<b>Energy Class</b>	
<b>Climate Class</b>	
<b>V/Hz</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	
<b>Extended Model</b>	
* PT- monoblock G- glass door	

<b>GNH650TN-PT</b>	<b>GNH650BT-PT</b>
740 x 830 x 2010	
-2 ~	-22 ~ -18
620	
3	
D	E
5	4
230/50	
R290	
40	
<b>GNH650TNG-PT</b>	<b>GNH650BTG-PT</b>

<b>GNH1410TN-PT</b>	<b>GNH1410BT-PT</b>
1480 x 830 x 2010	
-2 ~	-22 ~ -18
1354	
6	
D	E
5	4
230/50	
R290	
15	
<b>GNH1410TNG-PT</b>	<b>GNH1410BTG-PT</b>



# REFRIGERATED CABINET

Class A Standard Monoblock GN 2/1



- R290 refrigerant, 80mm insulation
- Ventilated monoblock cooling unit
- Digital controller (Wi-Fi optional)
- Embraco high-efficiency compressor
- Designed for GN 2/1 shelves or containers
- AISI 201 or AISI 304 body
- Rounded hygienic corners
- Magnetic replaceable gasket
- LED lighting
- Lock & key
- Self-closing reversible door
- Adjusted feet or casters
- Foot pedal open as optional



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>Shelves</b>	
<b>Energy Class</b>	
<b>Climate Class</b>	
<b>V/Hz</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	

<b>GNH610TN-PT</b>	<b>GNH610BT-PT</b>
740 x 828 x 2050	
-2 ~ +8	-22 ~ -18
470	
3	
A	B
5	4
230/50	
R290	
40	



# REFRIGERATED CABINET

Compact GN 2/1 600 series



- Ventilated monoblock cooling unit
- Digital controller Carel/Copeland, optional Wi-Fi function
- Designed for GN 2/1 shelves or containers.
- AISI 201 or AISI 304 body
- Rounded hygienic corners
- LED lighting
- Magnetic replaceable gasket
- Lock & key
- Self-closing reversible door
- Adjusted feet or casters
- Foot pedal opening as optional

### Optional

Class 5 climate class configuration

Model
Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
Energy Class
Climate Class
V/Hz
Refrigerant
Loading Qty/40HQ
Extended Model
* PT- monoblock
M- two half solid door
G- glass door

GNH600TNV-PT	GNH600BTV-PT
680 × 810 × 2010	
-2 ~ +8	-22 ~ -18
542	
D	E
5	4
230/50	
R600a	R290
42	
GNH600TNMV-PT	GNH600BTMV-PT
GNH600TNVG-PT	GNH600BTVG-PT

GNH1200TNV-PT	GNH1200BTV-PT
1340 × 810 × 2010	
-2 ~ +8	-22 ~ -18
1171	
D	E
5	4
230/50	
R290	
22	
GNH1200TNVM-PT	GNH1200BTVM-PT
GNH1200TNVG-PT	GNH1200BTVG-PT

# REFRIGERATED CABINET

Snack Series



- Static or ventilated
- Full solid door, half solid door and glass door options
- Digital controller Carel/Copeland, optional Wi-Fi function
- AISI 201 or AISI 304 body
- LED lighting
- Magnetic replaceable gasket
- Lock & key
- Self-closing reversible door
- Adjusted feet or casters

### Optional

Class 5 climate class configuration



Model
Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
Energy class
Climate Class
Shelves
V/Hz
Refrigerant
Loading Qty/40HQ
Extended Model
*M- two half solid door
G- glass door
V- ventilated

SNACKH400TN	SNACKH400BTV
680 × 710 × 2010	
-2 ~ +8	-22 ~ -18
462	
D	E
5	4
230/50	
R600a	R290
48	
SNACKH400TNM	SNACKH400TNMV
SNACKH400TNG	SNACKH400BTMV
SNACKH400TNV	

SNACKH800TN	SNACKH800BTV
1340 × 710 × 2010	
-2 ~ +8	-22 ~ -18
1003	
D	E
5	4
230/50	
R290	R290
25	
SNACKH800TNG	SNACKH800TNMV
SNACKH800TNM	SNACKH800BTMV
SNACKH800TNV	

# REFRIGERATED CABINET



## Fish Cabinet



- Ventilated cooling
- Digital controller Carel/Copeland, optional Wi-Fi function
- 7 fish pan included
- LED lighting
- Lock & key
- Adjustable feet or castors
- Self-closing reversible door
- Magnetic replaceable gasket
- Class 5 climate class configuration

Model
Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
Fish Pan
Energy Class
Climate Class
V/Hz
Refrigerant
Loading Qty/40HQ
Extended Model

GNH600TN-FISH
680 x 810 x 2010
-2 - +8
542
7
D
5
230/50
R134a/R600a
60
GNH600TNG-FISH glass door (class 4)

# REFRIGERATED CABINET



## Bakery & Gelato

- Ventilated cooling
- Digital controller Carel/Copeland, optional Wi-Fi function
- AISI 201 or AISI 304 body
- Bakery Version: 10 trays support (600x800mm)
- Gelato Version: 10 shelves for gelato pans
- Automatic defrost
- Magnetic replaceable gasket
- LED lighting
- Lock & key
- Self-closing reversible door
- Adjusted feet or castors
- Class 5 climate class configuration



Model
Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
Doors
Energy class
Climate Class
Shelves
V/Hz
Refrigerant
Loading Qty/40HQ

PAH800TN	PAH800BT
740 x 990 x 2010	
-2 - +8	-22 - -18
760	
1	
D	E
5	4
10	
230/50	
R290	R290
33	

GEH800TN	GEH800BT
740 x 990 x 2010	
-2 - +8	-22 - -18
760	
1	
D	E
5	4
10	
230/50	
R290	R290
33	

**NEW**

# REFRIGERATED CABINET

## Asian Style - CLASS 5

- Stainless steel construction
- 70 mm insulation
- Climate class 5
- Monoblock ventilated cooling
- Digital controller (Wi-Fi optional)
- Self-closing doors
- Full solid door or half door
- Magnetic replaceable gasket
- Lock & key
- Adjustable feet or castors
- LED lighting



### Model

#### Dimension (mm) (W x D x H)

#### Temperature (°C)

#### Capacity (L)

#### Climate class

#### Shelves

#### V/Hz

#### Refrigerant

#### Loading Qty/40HQ

**DNH520TNM-PT**

**DNH520BTM-PT**

700 x 800 x 1980

-2 - 8

-22 ~ -18

520

5

3

230/50

R290

44

**DNH980TNM-PT**

**DNH980BTM-PT**

1200 x 800 x 1980

-2 - 8

-22 ~ -18

980

5

6

230/50

R290

23

**DNH1160TNM-PT**

**DNH1160BTM-PT**

1400 x 800 x 1980

-2 - 8

-22 ~ -18

1160

5

6

230/50

R290

22

**DNH1530TNM-PT**

**DNH1530BTM-PT**

1800 x 800 x 1980

-2 - 8

-22 ~ -18

1530

5

9

230/50

R290

14






# REFRIGERATED COUNTER



## GN 1/1 - 700mm depth

Ventilated monoblock or non-monoblock version  
 Stainless steel construction AISI 201 or AISI 304  
 Automatic defrosting  
 LED lighting optional

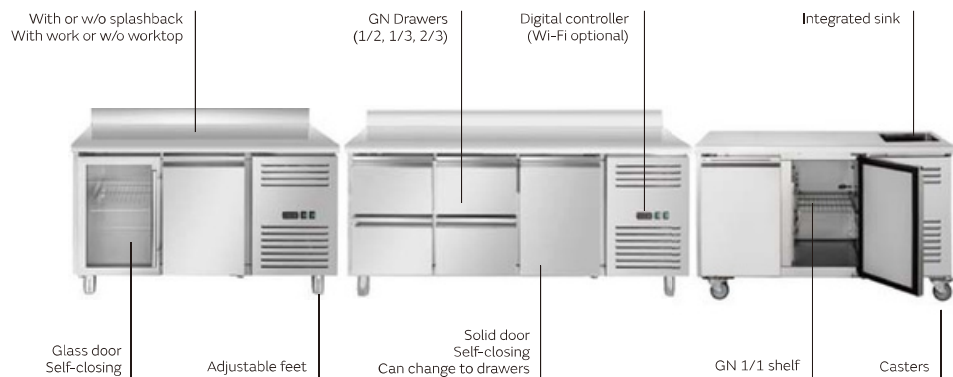

Magnetic replaceable gasket



Lock & key



GN 1/1 Shelf



Sink



Model	GNH2100TN-PT GNH2100BT-PT	GNH3100TN-PT GNH3100BT-PT	GNH4100TN-PT GNH4100BT-PT
Temperature (°C)	-2 ~ +8 -22 ~ -18	-2 ~ +8 -22 ~ -18	-2 ~ +8 -22 ~ -18
Dimension (mm) (W x D x H)	1360 x 700 x 850	1795 x 700 x 850	2230 x 700 x 850
Capacity (L)	274	424	573
Shelves	2	3	4
V/HZ	230/50	230/50	230/50
Energy class	D E	D E	D E
Climate Class	5 4	5 4	5 4
Refrigerant	R600a R290	R600a R290	R290 R290
Loading Qty/40HQ	66	50	46
Extended Models and Versions	GNH2200TN-PT GNH2200BT-PT GNH2100TNKB GNH2100BTKB GNH2200TNKB GNH2200BTKB	GNH3200TN-PT GNH3200BT-PT GNH3100TNKB GNH3100BTKB GNH3200TNKB GNH3200BTKB	GNH4200TN-PT GNH4200BT-PT GNH4100TNKB GNH4100BTKB GNH4200TNKB GNH4200BTKB



Double temperature controller

## REFRIGERATED COUNTER

Premium GN1/1 700mm depth Class 5



- Ventilated monoblock
- Digital controller (Wi-Fi optional)
- Stainless steel construction
- 70mm insulation
- Doors and drawers are interchangeable
- With or without splashback
- Self-closing doors
- Magnetic replaceable gasket
- Lock & key
- Adjustable feet or castors

### Optional

- LED lighting
- Aluminium handle



### Model

Dimension (mm) (W x D x H)  
Temperature (°C)

Capacity (L)

V/Hz

Energy Class

Climate Class

Shelves

Refrigerant

Loading Qty/40HQ

Extended Models and versions  
G -glass

**GNH2100TNA-PT**  
**GNH2100BTA-PT**

1390 × 700 × 850

-2 ~ 8

-22 ~ -18

270

230/50

B

C

5

2

R290

72

**GNH2100TNGA-PT**  
**GNH2100BTGA-PT**  
With drawers

**GNH3100TNA-PT**  
**GNH3100BTA-PT**

1855 × 700 × 850

-2 ~ 8

-22 ~ -18

420

230/50

B

C

5

3

R290

54

**GNH3100TNGA-PT**  
**GNH3100BTGA-PT**

**GNH4100TNA-PT**  
**GNH4100BTA-PT**

2320 × 700 × 850

-2 ~ 8

-22 ~ -18

570

230/50

B

C

5

4

R290

45

**GNH4100TNGA-PT**  
**GNH4100BTGA-PT**

## REFRIGERATED COUNTER

Asian Style - CLASS 5

- Stainless steel construction
- 70 mm insulation
- Climate class 5
- Monoblock ventilated cooling
- Digital controller (Wi-Fi optional)
- Self-closing doors
- Magnetic replaceable gasket
- Lock & key
- Adjustable feet or castors

### Optional LED lighting

- Aluminium full handle



### Model

Dimension (mm) (W x D x H)

Insulation Thickness (mm)

Temperature (°C)

Capacity (L)

Climate class

V/Hz

Doors

Refrigerant

Loading Qty/40HQ

Extended Models and Versions  
G -glass

**DNH1200TN-PT**  
**DNH1200BT-PT**

1200 × 760 × 800

70

-2 ~ +8

-22 ~ -18

318

5

230/50

2

R290

69

**DNH1200TNG-PT**  
**DNH1200BTG-PT**

**DNH1500TN-PT**  
**DNH1500BT-PT**

1500 × 760 × 800

70

-2 ~ +8

-22 ~ -18

439

5

230/50

2

R290

63

**DNH1500TNG-PT**  
**DNH1500BTG-PT**

**DNH1800TN-PT**  
**DNH1800BT-PT**

1800 × 760 × 800

70

-2 ~ +8

-22 ~ -18

561

5

230/50

3

R290

42

**DNH1800TNG-PT**  
**DNH1800BTG-PT**



NEW

# REFRIGERATED COUNTER

**GN 1/1 Under counter - 650mm Height**



- Digital controller (Wi-Fi optional)
- Solid door or 1/2 drawers
- Self-closing door
- Adjusted feet or casters
- Magnetic replaceable gasket
- AISI 201 or AISI 304 body
- LED lighting as option



Model	U-GNH2100TN U-GNH2100BT	U-GNH3100TN U-GNH3100BT	U-GNH4100TN U-GNH4100BT
Dimension (mm) (W x D x H)	1360 x 700 x 650	1795 x 700 x 650	2230 x 700 x 650
Temperature (°C)	-2 ~ 8 -22 ~ -18	-2 ~ 8 -22 ~ -18	-2 ~ 8 -22 ~ -18
Capacity (L)	182	281	379
V/HZ	230/50	230/50	230/50
Energy class	C E	C E	C E
Climate Class	5 4	5 4	5 4
Shelves	2	3	4
Refrigerant	R600a R290	R600a R290	R290
Loading Qty/40HQ	72	54	48

# REFRIGERATED COUNTER

**Chef Base Counter**



- Heavy duty with large work top, for the secure and stable placement of commercial catering equipment
- Digital controller (Wi-Fi optional)
- With drawers
- Self-closing door
- Adjusted feet or casters
- Magnetic replaceable gasket
- AISI 201 or AISI 304 body
- LED lighting as option



Model	U-GNH2140TNA U-GNH2140BTA	U-GNH3160TNA U-GNH3160BTA	U-GNH4180TNA U-GNH4180BTA
Dimension (mm) (W x D x H)	1600 x 700 x 650	2000 x 700 x 650	2400 x 700 x 650
Temperature (°C)	+2 ~ +8 -22 ~ -18	+2 ~ +8 -22 ~ -18	+2 ~ +8 -22 ~ -18
Capacity (L)	214	317	420
V/HZ	230/50	230/50	230/50
Refrigerant	R290	R290	R290
Loading Qty/40HQ	63	51	36

**NEW**



## REFRIGERATED COUNTER



### Refrigerated Drawer Unit



Heavy duty stainless steel construction  
 50mm insulation  
 Digital controller  
 Each drawer can be individually set from negative to positive  
 Ventilated cooling with automatic defrost  
 GN container compatible, dividers included  
 Wheels two with brake



Model	CB1-2	CB2-2	CB1-3	CB2-3
Dimension (mm) (W x D x H)	900 x 700 x 605	900 x 700 x 870	1225 x 700 x 605	1225 x 700 x 870
Temperature (°C)	+2 ~ +8 -22 ~ -18	+2 ~ +8 -22 ~ -18	+2 ~ +8 -22 ~ -18	+2 ~ +8 -22 ~ -18
Capacity (L)	95	95 x 2	134	134 x 2
V/HZ	230/50	230/50	230/50	230/50
GN Capacity	GN1/1 x 2	GN1/1 x 4	GN1/1 x 3	GN1/1 x 6
Refrigerant	R290	R290	R290	R290
Loading Qty/40HQ	108	72	81	54

## REFRIGERATED COUNTER



### Bakery Counter - 800mm Depth

Ventilated Cooling  
 Digital controller Carel/Copeland, optional Wi-Fi function  
 AISI 201 or AISI 304 body  
 Designed for 400x600mm shelves or baking trays  
 Lock & key  
 Magnetic replaceable gasket  
 Self-closing door  
 Adjusted feet or casters  
 LED lighting as option



Model	PAH2100TN	PAH2100BT	PAH3100TN	PAH3100BT
Dimension (mm) (W x D x H)	1510 x 800 x 850		2020 x 800 x 850	
Temperature (°C)	-2 ~ +8	-22 ~ -18	-2 ~ +8	-22 ~ -18
Capacity (L)	382		587	
V/HZ	230/50		230/50	
Energy class	C	E	C	E
Climate Class	5	4	5	4
Shelves	2		3	
Refrigerant	R600a	R290	R290	R290
Loading Qty/40HQ	40		40	



# REFRIGERATED COUNTER



Snack - 600mm Depth



Ventilated Cooling	AISI 201 or AISI 304 body	Digital controller Carel/Copeland, optional Wi-Fi function
Solid door or 1/2 drawers	Self-closing door	Lock & key
Magnetic replaceable gasket	Adjusted feet or casters	With or without splashback
LED lighting as option		

Model	SNACKH2100TN SNACKH2100BT	SNACKH3100TN SNACKH3100BT	SNACKH4100TN SNACKH4100BT
Dimension (mm) (W x D x H)	1360 x 600 x 850	1795 x 600 x 850	2230 x 600 x 850
Temperature (°C)	-2 ~ +8 -18 ~ -22	-2 ~ +8 -18 ~ -22	-2 ~ +8 -18 ~ -22
Capacity (L)	228	351	474
V/HZ	230/50	230/50	230/50
Energy class	C E	C E	C E
Climate Class	5 4	5 4	5 4
Shelves	2	3	4
Refrigerant	R600a R290	R600a R290	R290 R290
Loading Qty/40HQ	48	38	32
Extended Models and Versions * With backsplash	SNACKH2200TN SNACKH2200BT	SNACKH3200TN SNACKH3200BT	SNACKH4200TN SNACKH4200BT

# REFRIGERATED COUNTER



GN 1/1 700mm Depth | 1500mm - 2500mm Width



Ventilated Cooling	AISI 201 or AISI 304 body	Digital controller Carel/Copeland, optional Wi-Fi function
Self-closing door	Lock & key	Magnetic replaceable gasket
Adjusted feet or casters	700mm Depth (GNH) 800mm Depth (PAH)	<b>Options</b> With splashback W/O worktop for built-in installation LED lighting

Model	GNH1500TN-PT GNH1500BT-PT	GNH2000TN-PT GNH2000BT-PT	GNH2500TN-PT GNH2500BT-PT
Dimension (mm) (W x D x H)	1500 x 700 x 850	2000 x 700 x 850	2500 x 700 x 850
Temperature (°C)	-2 ~ +8    -22 ~ -18	-2 ~ +8    -22 ~ -18	-2 ~ +8    -22 ~ -18
Capacity (L)	290	450	680
V/HZ	230/50	230/50	230/50
Energy class	D E	D E	D E
Climate Class	5 4	5 4	5 4
Shelves	2	3	4
Refrigerant	R600a R290	R600a R290	R290 R290
Loading Qty/40HQ	44	32	24
Extended Models * 800mm depth	PAH1500TN-PT PAH1500BT-PT	PAH2000TN-PT PAH2000BT-PT	PAH2500TN-PT PAH2500BT-PT



# PIZZA TABLE

800 (400 x 600mm)



7 neutral drawers



Interior with adjustable stainless steel rails, for 60x40 shelves or trays



Digital controller Carel/Copeland, **optional** Wi-Fi function digital controller

Ventilated cooling with automatic defrost

Granite worktop  
Gray or black

Compatible with refrigerated topping unit

Adjusted feet or casters

AISI 201 or AISI 304 construction

Self closing door with magnetic replaceable gasket

Lock & key

**Options**  
LED lighting  
Black granite worktop

Climate Class 5

## Model

Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
V/Hz
Shelves
Energy class
Refrigerant
Loading Qty/40HQ



## PZH1610TN

1510 x 800 x 1000
-2 - +8
177
230/50
1
C
R600a
30




## PZH2600TN

1510 x 800 x 1000
-2 - +8
382
230/50
2
C
R600a
30



## PZH2610TN

2020 x 800 x 1000
-2 - +8
382
230/50
2
C
R600a
28



## PZH3600TN

2020 x 800 x 1000
-2 - +8
587
230/50
3
C
R290
28



## Model

Dimension (mm) (W x D x H)
Temperature (°C)
Capacity (L)
V/Hz
Shelves
Energy class
Refrigerant
Loading Qty/40HQ

## SH903PZ

1400 x 700 x 1200
+2 - +10
385
230/50
3
E
R290
48

# SALADETTE

700 (GN 1/1)



Open worktop GN dividers included  
GN container not included



Granite open work top  
GN dividers included  
GN container not included



Glass cover  
GN dividers included  
GN container not included



Solid door with  
GN 1/1 shelf,  
door can be  
changed to drawers

Options with 1 door, 2 doors or 3 doors

AISI 201 or AISI  
304 construction

Self closing door with magnetic  
replaceable gasket

European standard  
700mm depth and 850mm height

Digital controller Carel/Copeland,  
**optional** Wi-Fi function

Adjusted small feet, optional  
wheels

LED lighting as option

Fan assisted static cooling

### Worktop options:

Open with stainless steel lid

Stainless steel solid

Granite

Open with curved or squared glass cover  
or integrated with topping unit

# SALADETTE

700 (GN 1/1)



Open worktop



### Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

Climatic class

V/Hz

Doors

Refrigerant

Top GN Pan Capacity

Loading Qty/40HQ

### SH450

450 x 700 x 850

+2 ~ +10

107

4

230/50

1

R600a

1/1

150

### SH900

900 x 700 x 850

+2 ~ +10

247

4

230/50

2

R600a

1/1, 1/3, 1/6

72

### SH903

1365 x 700 x 850

+2 ~ +10

385

4

230/50

3

R290

1/1, 1/2, 1/3

48

Solid worktop



### Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

Climatic class

V/Hz

Doors

Refrigerant

Loading Qty/40HQ

Extended Models  
and Versions

\* D - drawer  
PZ - granite

### SH451

450 x 700 x 850

+2 ~ +10

107

4

230/50

1

R600a

150

SH451-2D

### SH901

900 x 700 x 850

+2 ~ +10

247

4

230/50

2

R600a

72

SH901-2D  
SH901-4D  
SH900PZ

### SH903SSTOP

1365 x 700 x 850

+2 ~ +10

385

4

230/50

3

R290

48

SH903-4D  
SH903-6D



# SALADETTE

## 700 (GN 1/1)

Integrated with topping unit  
Fan assisted cooling  
GN divider included, GN pan not included



Stainless steel worktop with lid



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>Climatic class</b>	
<b>V/Hz</b>	
<b>Doors</b>	
<b>Top GN Pan Capacity</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	

<b>PSH200</b>	
900 × 700 × 970	
+2 ~ +10	
247	
4	
230/50	
2	
1/3, 1/4, 1/6	
R600a	
72	

<b>PSH300</b>	
1368 × 700 × 970	
+2 ~ +10	
385	
4	
230/50	
3	
1/3, 1/4, 1/6	
R290	
48	

Granite worktop



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>Climatic class</b>	
<b>V/Hz</b>	
<b>Doors</b>	
<b>Top GN Pan Capacity</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	

<b>PSH900</b>	
900 × 700 × 1075	
+2 ~ +10	
247	
4	
230/50	
2	
5 × 1/6	
R600a	
72	

<b>PSH903</b>	
1368 × 700 × 1075	
+2 ~ +10	
385	
4	
230/50	
3	
8 × 1/6	
R290	
48	

# SALADETTE

## 700 (GN 1/1)

With glass cover



Square glass with one shelf



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>V/Hz</b>	
<b>Doors</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	

<b>SH900SQ</b>	
900 × 700 × 1310	
+2 ~ +10	
247	
230/50	
2	
R600a	
72	

<b>SH903SQ</b>	
1365 × 700 × 1310	
+2 ~ +10	
385	
230/50	
3	
R290	
48	

Curved glass



<b>Model</b>	
<b>Dimension (mm) (W x D x H)</b>	
<b>Temperature (°C)</b>	
<b>Capacity (L)</b>	
<b>V/Hz</b>	
<b>Doors</b>	
<b>Drawers</b>	
<b>Refrigerant</b>	
<b>Loading Qty/40HQ</b>	


<b>SH900CG</b>	
900 × 700 × 1295	
+2 ~ +10	
247	
230/50	
2	
/	
R600a	
72	

<b>SH903CG</b>	
1365 × 700 × 1295	
+2 ~ +10	
385	
230/50	
3	
/	
R290	
48	



# PREP TABLE

## Sandwich Counter



**Model**

**Dimension (mm) (W x D x H)**

**Temperature (°C)**

**V/Hz**

**Gross Capacity (L)**

**Container Capacity**

**Shelves**

**Refrigerant**

**Loading Qty/40HQ**

**SHH2000/700**

1360 x 700 x 1085

2 ~ +8

230/50

282

7 x 1/3

1/door

R290

48

**SHH3000/700**

1795 x 700 x 1085

2 ~ +8

230/50

417

8 x 1/3

1/door

R290

38



**Interior rails and shelves**

700mm depth: GN1/1  
800mm depth: 400 x 800 tray





**Work top**

Dividers as standard,  
GN container not included



**Digital controller**

Carel/Copeland  
Optional Wi-Fi function



**Model**

**Dimension (mm) (W x D x H)**

**Temperature (°C)**

**V/Hz**

**Gross Capacity (L)**

**Container Capacity**

**Shelves**

**Refrigerant**

**Loading Qty/40HQ**

**SHH2000/800**

1510 x 800 x 1085

2 ~ +8

230/50

390

8 x 1/3

1/door

R290

30

**SHH3000/800**

2020 x 800 x 1085

2 ~ +8

230/50

580

10 x 1/3

1/door

R290

28

Ventilated cooling

AISI 201 or AISI 304 body

Lock & key

Magnetic replaceable gasket

Interior LED lighting as

Adjusted feet or casters

Integrated with refrigerated  
topping unit

Self closing door



# PREP TABLE

## Gastronorm Kebab Counter



Granite worktop



Stainless steel worktop  
Heavy duty lid



Stainless steel worktop with cutting board  
Heavy duty lid



Customized front panel



Cash counter available

Ventilated cooling with Automatic defrosting

AlSi 201 or AlSi 304 body

Digital controller Carel/Copeland, optional Wi-Fi function

Self closing door with Magnetic replaceable gasket

Compatible with GN container, dividers as standard, GN container not included

1.5m, 2.0m, 2.5m width with different work top

Adjusted feet or casters

LED lighting

# PREP TABLE

## Granite top



Optional stainless steel worktop

W/O glass cover with shelf as option



Model	PAH1500TNZG	PAH2000TNZG	PAH2500TNZG
Dimension (mm) (W x D x H)	1500 x 800 x 850	2000 x 800 x 850	2500 x 800 x 850
Temperature (°C)	+2 ~ +10	+2 ~ +10	+2 ~ +10
Capacity (L)	310	480	650
V/Hz	230/50	230/50	230/50
Shelves	2	3	4
Refrigerant	R290	R290	R290
Loading Qty/40HQ	28	28	16
Extended Models and Versions (Granite with glass cover)	PAH1500TNS	PAH2000TNS	PAH2500TNS

## PREP TABLE

**Stainless steel top with heavy duty lifted glass lid**

Glass lid with seal to keep the temperature of the GN containers

Free solid worktop space on the side

Granite worktop as option



### Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

V/Hz

Shelves

Refrigerant

Loading Qty/40HQ

### PAH1500TNKG

1500 x 810 x 860

+2 ~ +10

365

230/50

1

R290

28

### PAH2000TNKG

2000 x 810 x 860

+2 ~ +10

565

230/50

2

R290

28

### PAH2500TNKG

2500 x 810 x 860

+2 ~ +10

765

230/50

3

R290

16



## PREP TABLE

**Open work top with heavy duty glass lid and cover**

Glass lid with seal to keep the temperature of the GN containers

Lifted glass lid becoming the front panel of the glass cover

Sliding cutting board included



### Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

V/Hz

Shelves

Refrigerant

Loading Qty/40HQ

### PAH1500TNSK

1500 x 860 x 1525

2 ~ +10

310

230/50

2

R290

28

### PAH2000TNSK

2000 x 860 x 1525

2 ~ +10

480

230/50

3

R290

26

### PAH2500TNSK

2500 x 860 x 1525

2 ~ +10

650

230/50


4

R290

16



# BLAST CHILLER

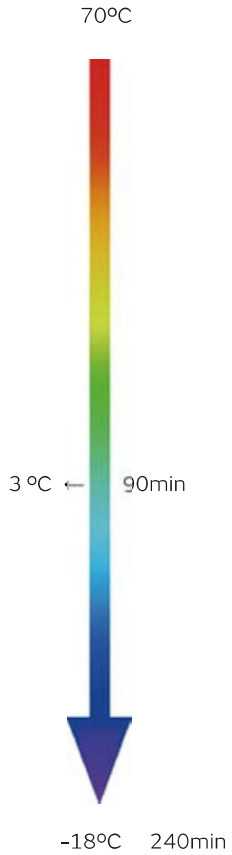

Stainless steel exterior & Interior,  
AISI 201 or 304


Automatic closing door and magnetic  
replaceable gasket

Compatible GN1/1 and 400 x 600mm pan

Ventilated cooling  
Automatic defrost

Digital controller Copeland or Hongke,  
4 programmed modes

Included detachable and heated core probe



Probe



Rails for GN 1/1 and  
400 x 600mm tray



## Model

Dimension (mm) (W x D x H)

Temperature (°C)

Time 70°C/3°C (min)

Time 70°C/-18°C (min)

Capacity (L)

V/HZ

Refrigerant

Loading Qty/40HQ

## BLASTH-3A

800 x 825 x 880

-35 - 0

90

240

88

230/50

R290

52

## BLASTH-5A

800 x 825 x 980

-35 - 0

90

240

118

230/50

R290

52

## Model

Dimension (mm) (W x D x H)

Temperature (°C)

Time 70°C/3°C (min)

Time 70°C/-18°C (min)

Capacity (L)

V/HZ

Refrigerant

Loading Qty/40HQ

## BLASTH-10A

800 x 825 x 1445

-35 - 0

90

240

218

230/50

R290

26

## BLASTH-15A

800 x 825 x 1795

-35 - 0

90

240

318

230/50

R290

26





# REFRIGERATED TOPPING UNIT VRX



Static cooling  
 Glass cover or stainless steel lid  
 Digital controller Carel/Copeland



Model	VRXH1000/330 VRXH1000/380	VRXH1200/330 VRXH1200/380	VRXH1400/330 VRXH1400/380	VRXH1500/330 VRXH1500/380
Dimension (mm) (W x D x H)	1000 x 335 x 435 1000 x 395 x 435	1200 x 335 x 435 1200 x 395 x 435	1400 x 335 x 435 1400 x 395 x 435	1500 x 335 x 435 1500 x 335 x 435
Temperature (°C)	0 ~ +10	0 ~ +10	0 ~ +10	0 ~ +10
Capacity (L)	GN1/4 x 4 GN1/3x2 + GN1/2x1	GN1/4 x 5 GN1/3x3 + GN1/2x1	GN1/4 x 6 GN1/3 x 6	GN1/4 x 7 GN1/3x5 + GN1/2x1
V/Hz	230/50	230/50	230/50	230/50
Refrigerant	R600a	R600a	R600a	R600a
Loading Qty/40HQ	544 432	386 323	336 280	310 261
Extended Models and Versions (Top S/S Cover)	VRXH1000/330S VRXH1000/380	VRXH1200/330S VRXH1200/380S	VRXH1400/330S VRXH1400/380S	VRXH1500/330S VRXH1500/380S

Model	VRXH1600/330 VRXH1600/380	VRXH1800/330 VRXH1800/380	VRXH2000/330 VRXH2000/380
Dimension (mm) (W x D x H)	1600 x 335 x 435 1600 x 395 x 435	1800 x 335 x 435 1800 x 395 x 435	2000 x 335 x 435 2000 x 335 x 435
Temperature (°C)	0 ~ +10	0 ~ +10	0 ~ +10
Capacity (L)	GN1/4 x 7 GN1/3 x 7	GN1/4 x 9 GN1/3 x 8	GN1/4 x 10 GN1/3 x 9
V/Hz	230/50	230/50	230/50
Refrigerant	R600a	R600a	R600a
Loading Qty/40HQ	294 247	260 218	242 218
Extended Models and Versions (Top S/S Cover)	VRXH1600/330S VRXH1600/380	VRXH1800/330S VRXH1800/380S	VRXH2000/330S VRXH2000/380S

# REFRIGERATED TOPPING UNIT RTR



Static cooling  
Digital controller Carel/Copeland  
Holds up to 8 x 1/6 pans (included)  
Stainless steel housing with adjustable feet



## Model

Dimension (mm) (W x D x H)

Temperature (°C)/ (°F)

Capacity (L)

V/Hz

Refrigerant

## RTR-4

380 x 654 x 231

+2 ~ +10 / +35 ~ +50

GN1/6 x 4

115/60

R600a

## RTR-8

698 x 654 x 231

+2 ~ +10 / +35 ~ +50

GN1/6 x 6

115/60

R600a





# CHEF BASE



Heavy duty stainless steel construction

Marine edge worktop


Equipped with drawers and heavy duty rails, GN container and dividers are included

Removable gasket for easy cleaning and maintenance

Integrated drawer handle

4" casters for convenient mobility

Optional GN containers

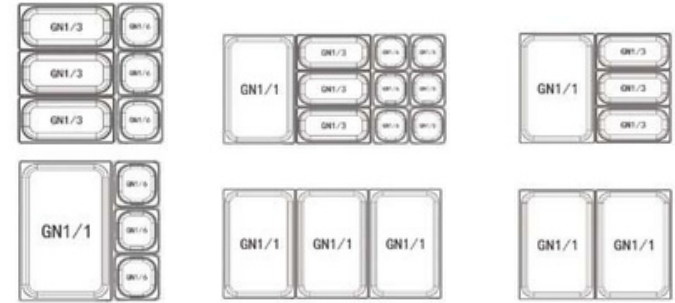

Model	CB36TN	CB52TN	CB72TN
Dimension (mm) (W x D x H)	920 x 820 x 685	1340 x 820 x 685	1835 x 820 x 685
Temperature (°C)	0 ~ +8	0 ~ +8	0 ~ +8
Capacity (L)	72	131	178
Refrigerant	R290	R290	R290
Loading Qty/40HQ	52	32	26

Model	CB36BT	CB52BT	CB72BT
Dimension (mm) (W x D x H)	1005 x 820 x 690	1425 x 820 x 690	1920 x 820 x 690
Temperature (°C)	-22 ~ -18	-22 ~ -18	-22 ~ -18
Capacity (L)	72	131	178
Refrigerant	R290	R290	R290
Loading Qty/40HQ	52	32	26

# REACH-IN REFRIGERATOR



## Model

Dimension (mm)  
(W x D x H) (inch)

Temperature (°C)  
(°F)

Capacity (L/cu.ft)

Refrigerant

Loading Qty/40HQ

Extended Models  
and Versions  
\*

G-glass door

GD-27R	GD-27F	GD-54R	GD-54F	GD-81R	GD-81F
686 × 812 × 2117 27 × 32 × 83		1375 × 812 × 2117 54 × 32 × 83		2062 × 812 × 2117 81 × 32 × 83	
+2 ~ +8 +35 ~ +46	-22 ~ -18 0 ~ +8	+2 ~ +8 +35 ~ +46	-22 ~ -18 0 ~ +8	+2 ~ +8 +35 ~ +46	-22 ~ -18 0 ~ +8
595/21		1300/45.9		2025/71.5	
R290		R290		R290	
39		21		13	
<b>GD-27RG</b>	<b>GD-27FG</b>	<b>GD-54RG</b>	<b>GD-54FG</b>	<b>GD-81RG</b>	<b>GD-81FG</b>

Ventilated cooling

Digital thermostat: Carel, Copeland or Eliwell

Lock & key

Material: stainless steel or aluminium

Reversible and self-closing door with magnetic door gasket

**Optional:**  
Adjustable feet

Interior bottom curved edges for easy cleaning

Internal LED light



Control panel with decoration strip



Adjusted shelves and clips



Glass sliding door



# REACH-IN

## Double Temperature




Equipped with refrigerator and freezer sections, ventilated cooling

Two Digital controllers Carel/Copeland

Self-closing door with magnetic gasket, lock and key

LED lighting

With heavy duty casters, two with brake

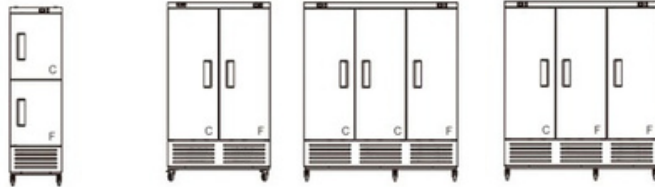

Model	STH-27RF	STH-54RF	STH-81RRF	STH-81RFF
<b>Dimension (mm)</b>	686 × 812 × 2117	1375 × 812 × 2117	2062 × 812 × 2117	2062 × 812 × 2117
<b>(W x D x H) (inch)</b>	27 × 32 × 83	54 × 32 × 83	81 × 32 × 83	81 × 32 × 83
<b>Temperature (°C/°F)</b>	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/-8 ~ 0 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/-8 ~ 0 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/-8 ~ 0 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/-8 ~ 0 (°F)
<b>Capacity (L/cu.ft)</b>	Chiller 269/19.5 Freezer 269/19.5	Chiller 594/21 Freezer 594/21	Chiller 1293/45.7 Freezer 594/21	Chiller 594/21 Freezer 1293/45.7
<b>Refrigerant</b>	R290	R290	R290	R290
<b>Loading Qty/40HQ</b>	39	21	13	13

# UNDER COUNTER



Ventilated cooling with rear mounted compressor

Digital controller Carel/Copeland

Self-closing door with magnetic gasket

Automatic defrost

With heavy duty casters, two with brake

**Optional:**  
24" depth compact version



Model	TUC-29BR TUC-29BF	TUC-48BR TUC-48BF	TUC-60BR TUC-60BF	TUC-72BR TUC-72BF
<b>Dimension (mm)</b>	735 × 812 × 970	1230 × 812 × 970	1555 × 812 × 970	1827 × 812 × 970
<b>(W x D x H) (inch)</b>	29 × 32 × 38	48 × 32 × 38	61 × 32 × 38	72 × 32 × 38
<b>Door</b>	1	2	2	3
<b>Temperature (°C/°F)</b>	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/0 ~ +8 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/0 ~ +8 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/0 ~ +8 (°F)	+2 ~ +8/-18 ~ -22(°C) +35 ~ +46/0 ~ +8 (°F)
<b>Capacity (L/cu.ft)</b>	230/8.1	417/14.7	540/19.1	642/22.7
<b>Refrigerant</b>	R290	R290	R290	R290
<b>Loading Qty/40HQ</b>	60	44	28	24
<b>Extended Models and Versions</b>	<b>24"/5.6 cu.ft</b>	<b>24"/10.1 cu.ft</b>	<b>24"/13.1 cu.ft</b>	<b>24"/15.6 cu.ft</b>



# PREP TABLE

Pizza



Ventilated cooling

Digital controller Carel/Copeland with automatic defrost

Stainless steel and aluminium construction

Self-closing door with magnetic gasket

Equipped with GN1/3 4" depth pan and cutting board

With casters

**Optional:**

Different style handles

Model	TPP-47	TPP-67	TPP-94
Dimension (mm) (W x D x H) (inch)	1205 x 880 x 1068 48 x 35 x 42	1800 x 880 x 1068 70 x 35 x 42	2395 x 880 x 1068 94 x 35 x 42
Temperature (°C/°F)	+2 ~ +8 +35 ~ +46	+2 ~ +8 +35 ~ +46	+2 ~ +8 +35 ~ +46
Capacity (L/cu.ft)	310/11	592/20.9	874/30.9
Refrigerant	R290	R290	R290
Loading Qty/40HQ	39	21	13

# PREP TABLE

Salad and sandwich



Ventilated cooling

Digital controller Carel/Copeland with automatic defrost

Stainless steel and aluminium construction

Self-closing door  
Magnetic gasket

Equipped with GN1/6 4" depth pan and cutting board

With casters, two with brake

Model	TSSU-29	TSSU-48	TSSU-60	TSSU-72
Dimension (mm) (W x D x H) (inch)	735 x 812 x 1152 29 x 32 x 45	1230 x 812 x 1152 48 x 32 x 45	1555 x 812 x 1152 61 x 32 x 45	1827 x 812 x 1152 72 x 32 x 45
Door	1	2	2	3
Temperature (°C/°F)	+2 ~ +8/+35 ~ +46	+2 ~ +8/+35 ~ +46	+2 ~ +8/+35 ~ +46	+2 ~ +8/+35 ~ +46
Capacity (L/cu.ft)	230/8.1	417/14.7	540/19.1	642/22.7
Refrigerant	R290	R290	R290	R290
Loading Qty/40HQ	60	44	28	24
Extended Models * MT-mega top * S - 24 inch	TSSU-29MT TSSU-29-S	TSSU-48MT TSSU-48-S	TSSU-60MT TSSU-60-S	TSSU-72MT TSSU-72-S



# STORAGE CABINET

ABS Interior Version



Exterior white coated steel or stainless steel

Freezer ventilated cooling or static cooling with evaporator shelves

Cooler static with fan cooling

Interior white ABS with integrated guides

Digital thermostat

Solid door or glass door

Magnetic replaceable gasket

Automatic defrost

Integrated door handle

Front: adjusted feet, back two rollers, optional wheels

**Optional:**  
 Gray color painted steel exterior and black ABS interior  
 Internal LED lighting  
 Self-closing door

## Model

Dimension (mm)  
 Temperature (°C)  
 Capacity (L)  
 Shelves  
 Shelf size(mm)

## RR20

600 × 635 × 835  
 0 ~ +8  
 99  
 2+1  
 U: 496 × 410  
 B: 496 × 270

## RF20

-23 ~ -18  
 97  
 2  
 425 × 412

Refrigerant  
 Loading Qty/40HQ

R600a  
 162

Extended Models and Versions  
 \*G - glass door  
 SS- SUS exterior

RR20SS  
 RR20G  
 RR20GSS

RF20SS

## Model

Dimension (mm)  
 Temperature (°C)  
 Capacity (L)  
 Shelves  
 Shelf size(mm)

## RR40

600 × 639 × 1875  
 0 ~ +8  
 267  
 4+1  
 U: 496 × 410  
 B: 496 × 210

## RF40

-23 ~ -18  
 249  
 6  
 425 × 412

Refrigerant  
 Loading Qty/40HQ

R600a  
 57

Extended Models and Versions  
 \*G - glass door  
 SS- SUS exterior

RR40SS  
 RR40G  
 RR40GSS

RF40SS

## Model

Dimension (mm)  
 Temperature (°C)  
 Capacity (L)  
 Shelves  
 Shelf size(mm)

## RR60

600 × 639 × 1875  
 0 ~ +8  
 473  
 4+1  
 U: 668 × 525  
 B: 668 × 210

## RF60

-23 ~ -18  
 411  
 6  
 588 × 496

Refrigerant  
 Loading Qty/40HQ

R600a  
 42

Extended Models and Versions  
 \*G - glass door  
 SS- SUS exterior

RR60SS  
 RR60G  
 RR60GSS

RF60SS



# STORAGE CABINET

Interior White Painted Steel Version



Exterior white coated steel or stainless steel

Solid door or glass door

Magnetic replaceable gasket

Interior white painted aluminium

Digital thermostat

Automatic defrost

Front adjusted feet, back two rollers

Optional:  
Static or ventilated cooling  
Gray color painted steel exterior

**Optional:**  
Internal LED lighting  
Self-closing door

## Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

Refrigerant

Loading Qty/40HQ

**Extended Models and Versions**  
\*G - glass door  
SS- SUS exterior

## SRH20

595 x 653 x 870

0 ~ +8

170

R600a

180

**SRH20G**  
**SRH20SS**

## SFH20

-22 ~ -18

## Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

Refrigerant

Loading Qty/40HQ

**Extended Models and Versions**  
\*G - glass door  
SS- SUS exterior

## SRH40

595 x 653 x 1840

0 ~ +8

380

R600a

54

**SRH40G**  
**SRH40SS**

## SFH40

-22 ~ -18

R290

## Model

Dimension (mm) (W x D x H)

Temperature (°C)

Capacity (L)

Refrigerant

Loading Qty/40HQ

**Extended Models and Versions**  
\*G - glass door  
SS- SUS exterior

## SRH60

775 x 723 x 1840

0 ~ +8

590

R600a

42

**SRH60G**  
**SRH60SS**

## SFH60

-22 ~ -18

R290

**SFH60G**  
**SFH60SS**

