





CATALOG

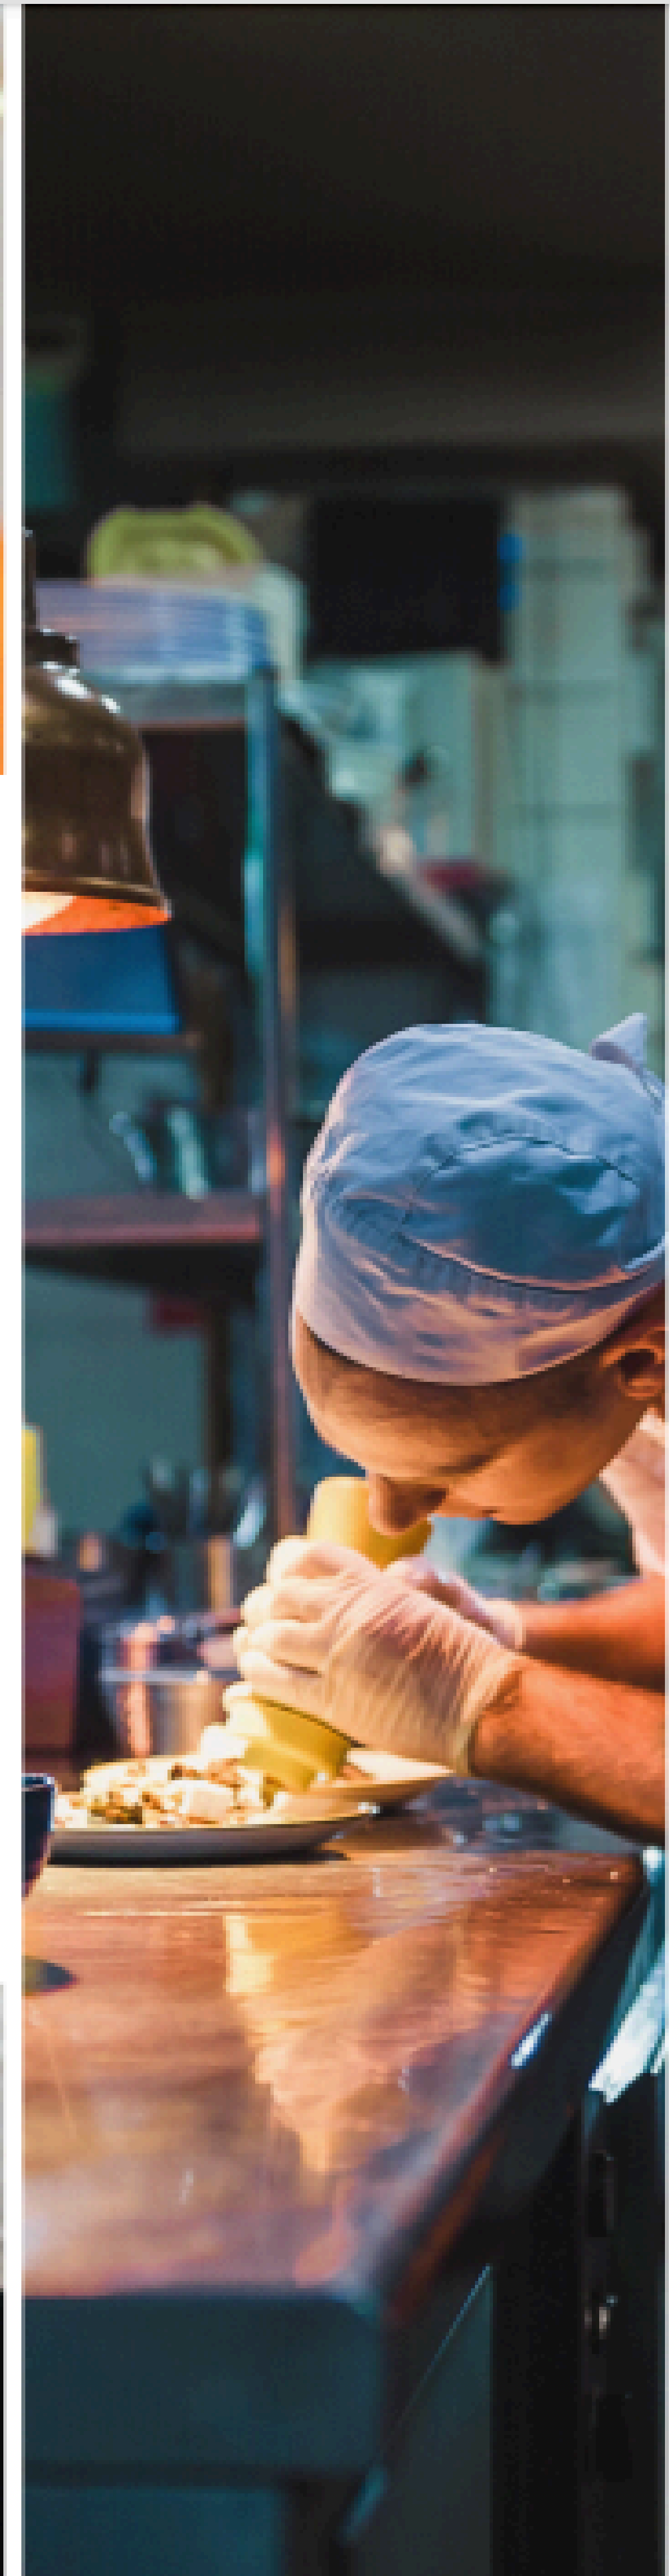

2024

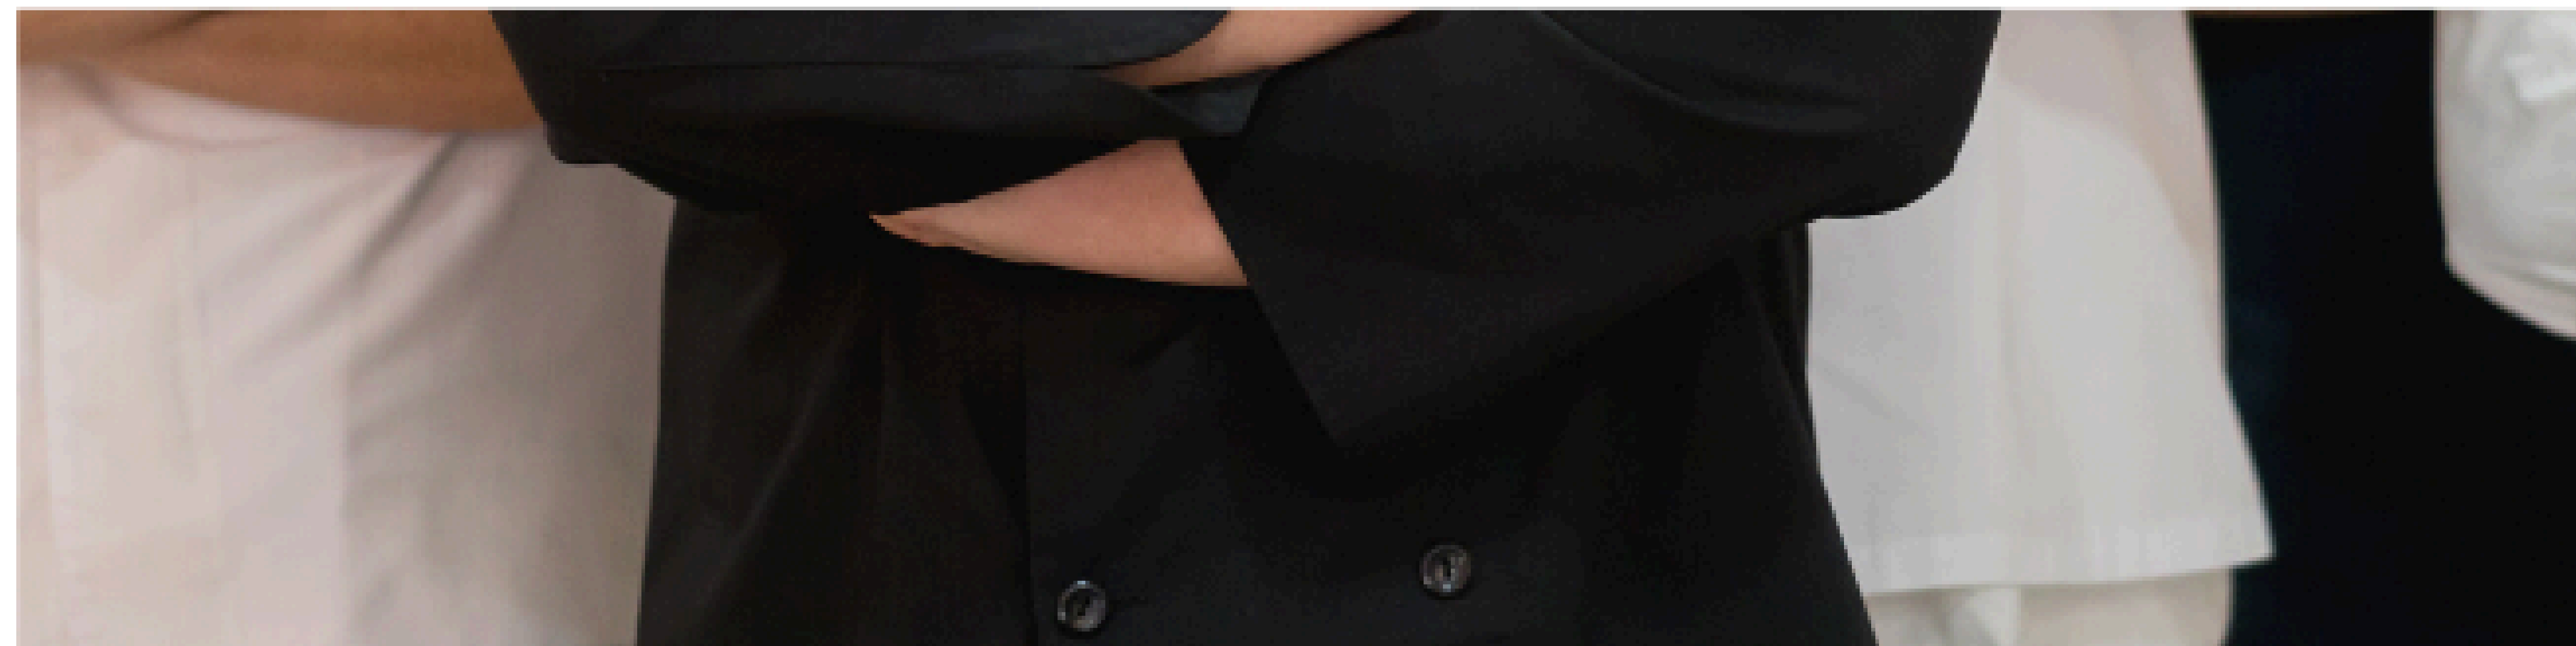




AUTOMATIC CONTINUOUS TYPE VACUUM PACKAGING MACHINE

Automatic continuous type vacuum packaging machine continuously operates through the cylinder drive the rotation of the conveyor belt and applies to the product packaging of large productive enterprises. Depending on the different sizes of the contents, one or two sealers could be set within one vacuum chamber in order to improve the working efficiency. The workbench angle could be adjusted according to the features of the contents.

Technical Characters:

- Control System: OMRON PLC programmable control system and human-computer interface touch screen.
- Material of Main Structure: 304 stainless steel.
- V-Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
- Conveyor Belt: Dismountable conveyor belt is convenience for cleaning the machine.
- Eversible Lid: The eversible lid is convenience for the maintenance person to replace the components inside the lid easily.
- Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
- Electrical requirement and plug could be custom according to customer requirement.
- Gas flushing is optional.

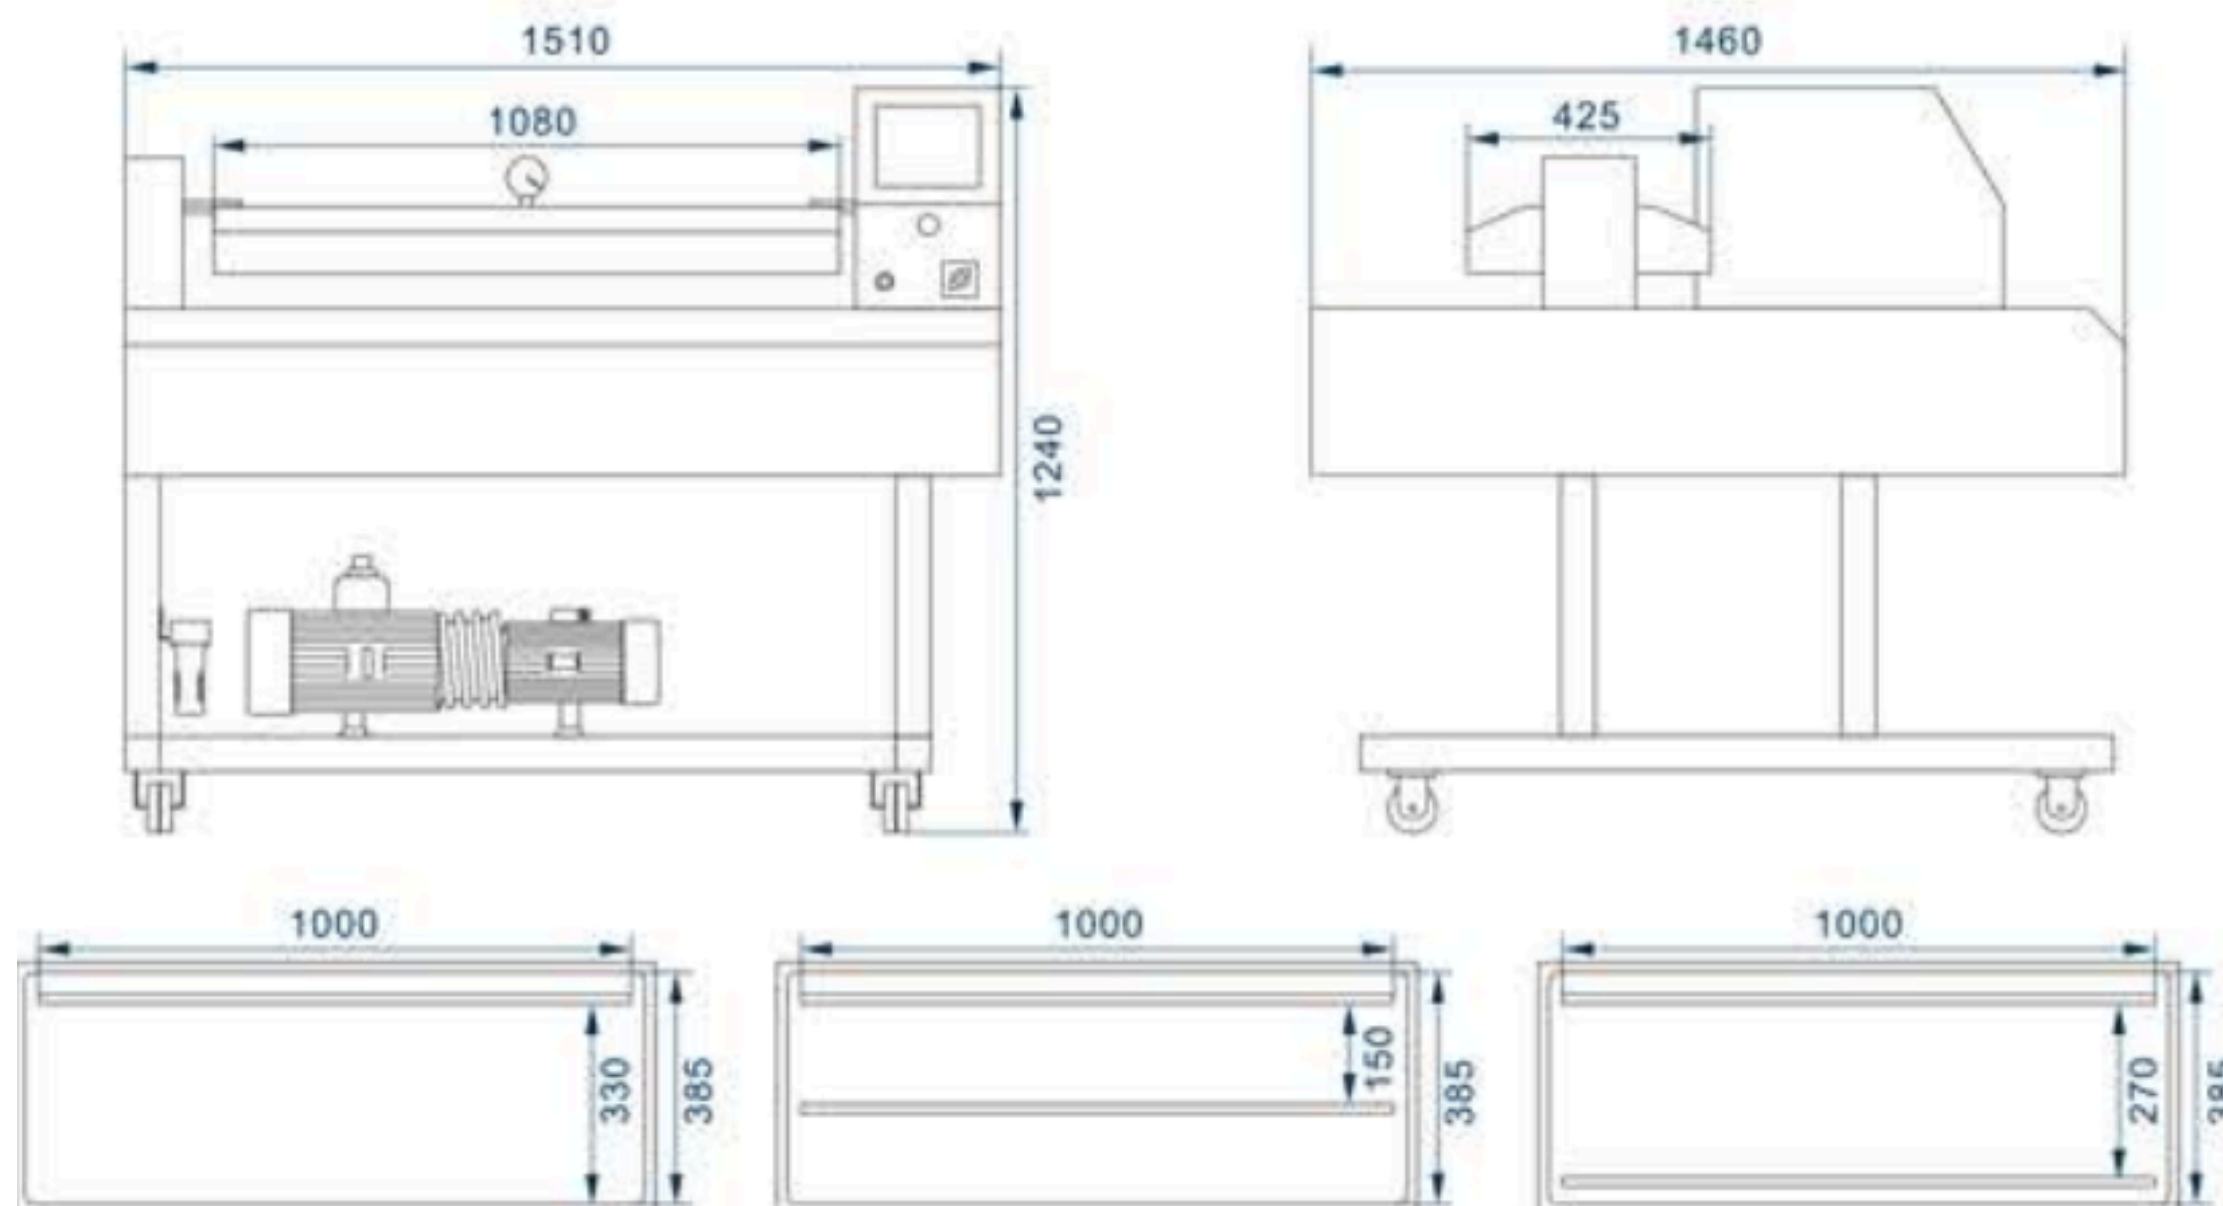


Model	DZ-1000QF	Vacuum Chamber Dimensions(mm)	1040 x 385 x 60
Vacum Chamber(m³/h)	100 / 200	Gross Weight(kg)	555
Power(kw)	2.2	Net Weight(kg)	447
Production Cycle(times/min)	2-3	Shipping Dimensions(mm)	1580 x 1530 x 1420






AUTOMATIC DOUBLE CHAMBER VACUUM PACKAGING MACHINE

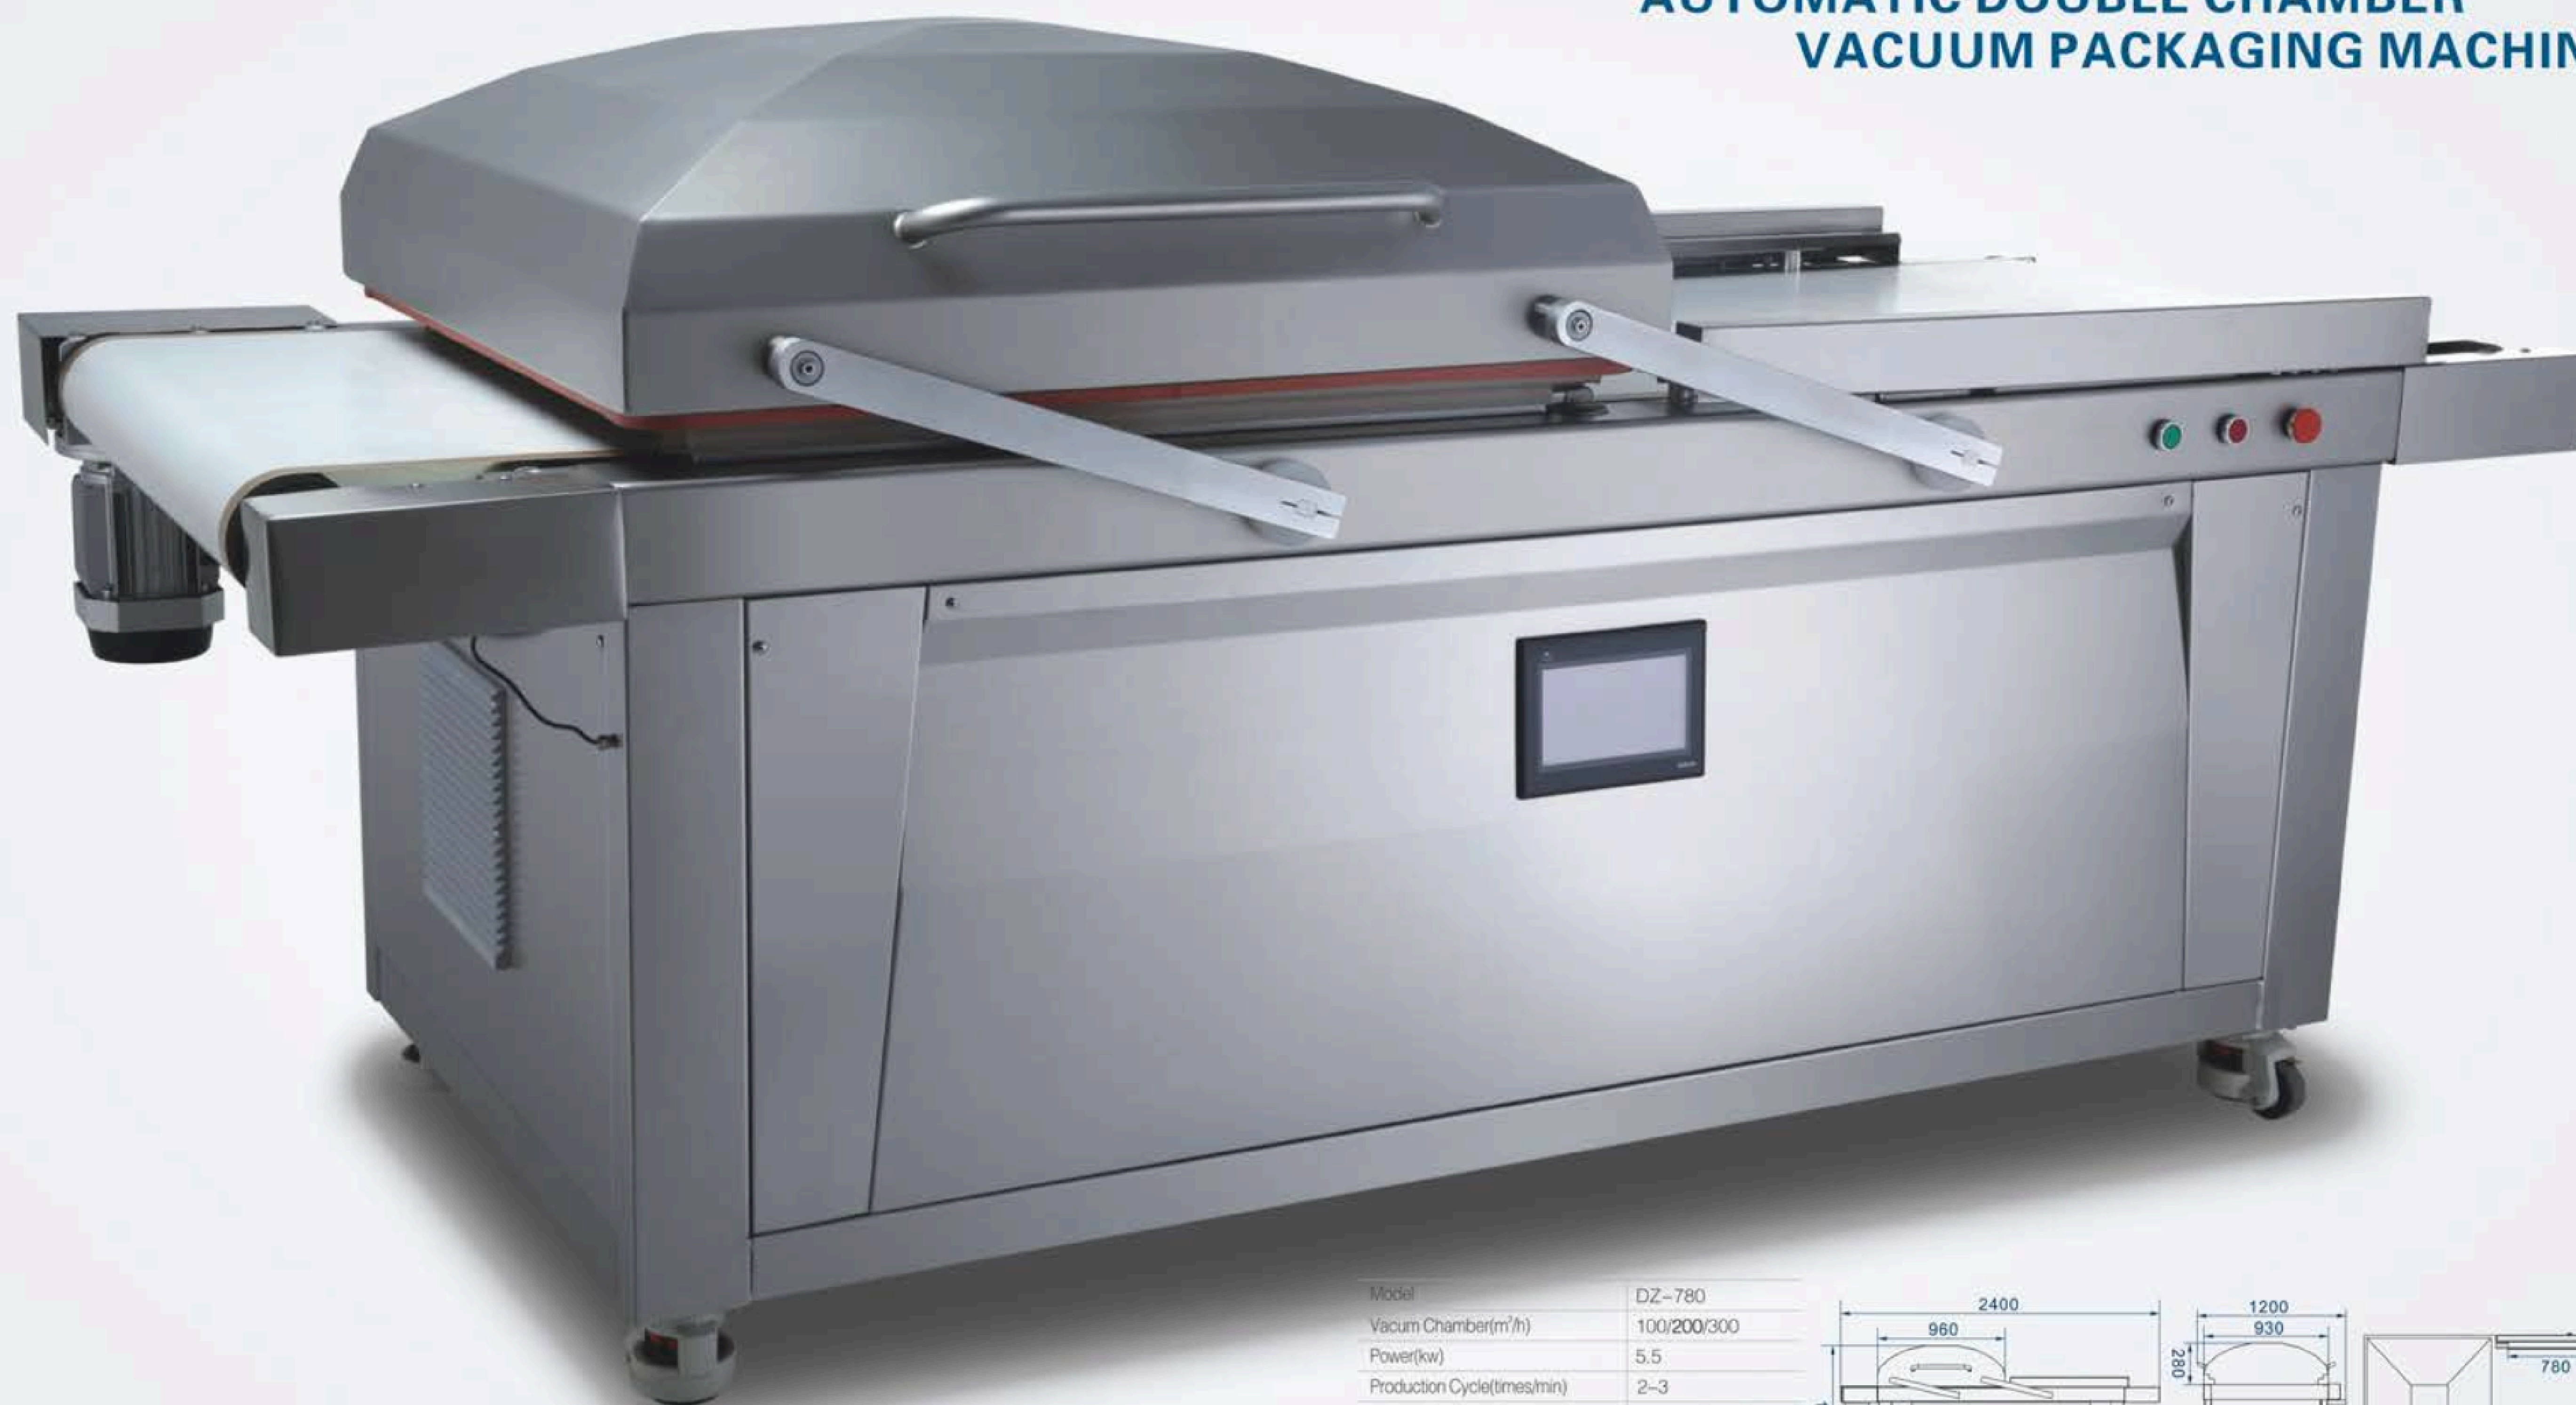

Model	DZ-780
Vacuum Chamber(m ³ /h)	100/200/300
Power(kw)	5.5
Production Cycle(times/min)	2-3
Vacuum Chamber Dimensions(mm)	960 x 930 x 280
Gross Weight(kg)	670
Net Weight(kg)	571
Shipping Dimensions(mm)	2500 x 1300 x 1260

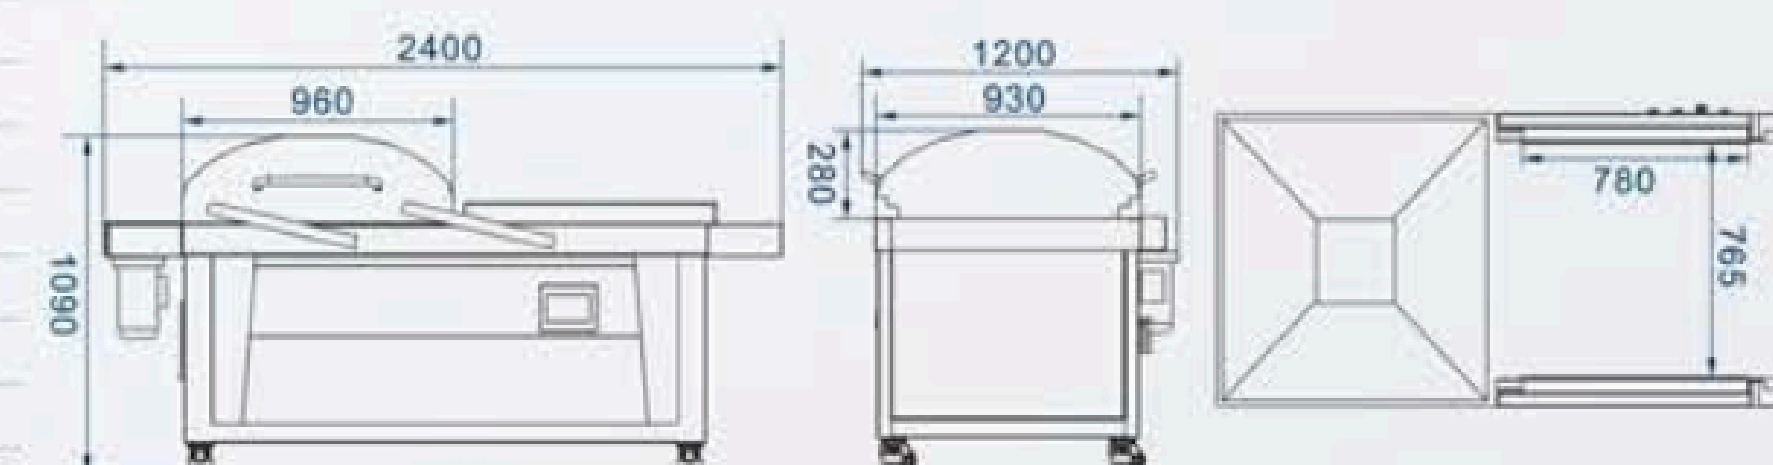





DOUBLE CHAMBER VACUUM PACKAGING MACHINE

WENZHOU DAJIANG Double Chamber Vacuum Packaging Machines series are equipped with two chambers. While products are being packed in the first chamber, the second chamber can be unloaded and loaded again. This makes the packaging procedure especially efficient. Double chamber machines from WENZHOU DAJIANG are easy to operate, clean and service. They are applicable for the product packaging of large productive enterprises. The DZ-800-2S and DZ-950-2S have two drive mode for the lid which are manual and pneumatic.


Model	DZ-500-2S
Vacuum Chamber(m ³ /h)	20×2 / 40 / 63
Power(kw)	1.1
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	610 × 550 × 160
Gross Weight(kg)	313
Net Weight(kg)	290
Shipping Dimensions(mm)	1360 × 770 × 1170

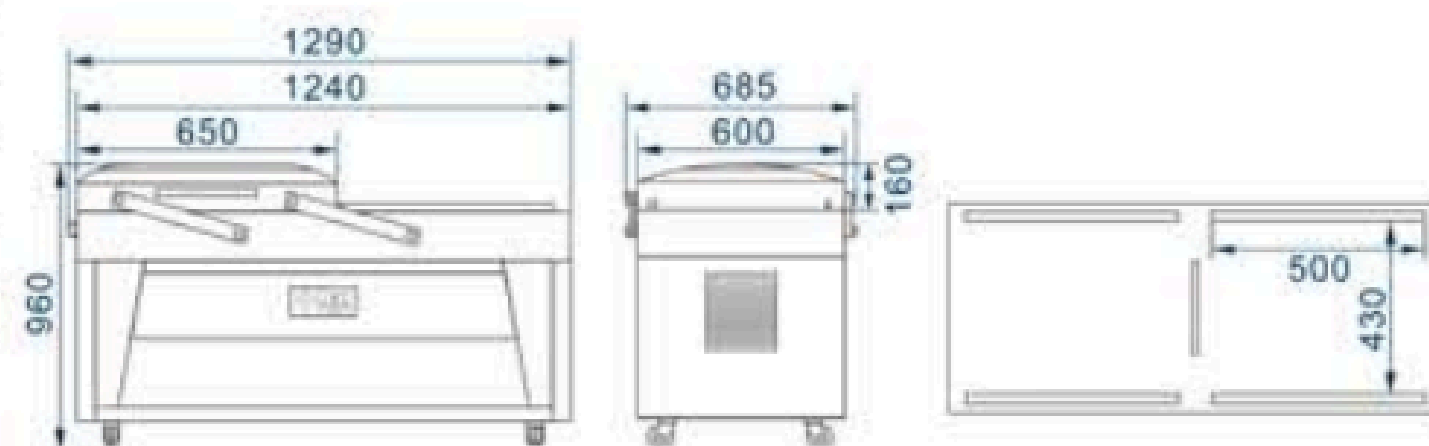


Model	DZ-600-2S
Vacuum Chamber(m ³ /h)	20×2 / 40 / 63 / 100
Power(kw)	1.1
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	720 × 550 × 160
Gross Weight(kg)	350
Net Weight(kg)	285
Shipping Dimensions(mm)	1560 × 770 × 1170

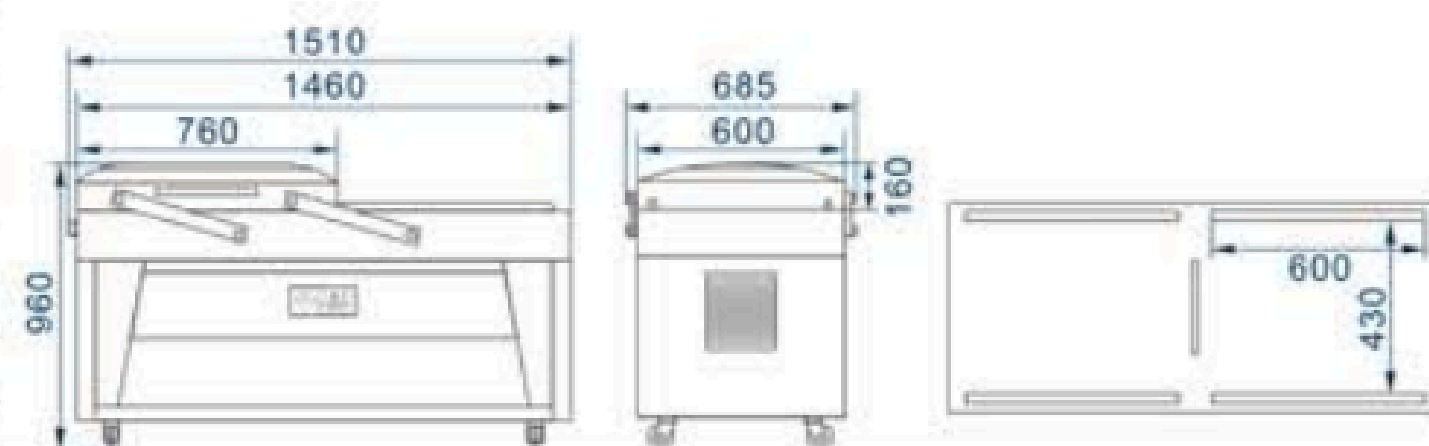


Model	DZ-700-2S
Vacuum Chamber(m ³ /h)	63 / 100
Power(kw)	2.2
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	810 × 620 × 210
Gross Weight(kg)	420
Net Weight(kg)	330
Shipping Dimensions(mm)	1750 × 870 × 1240

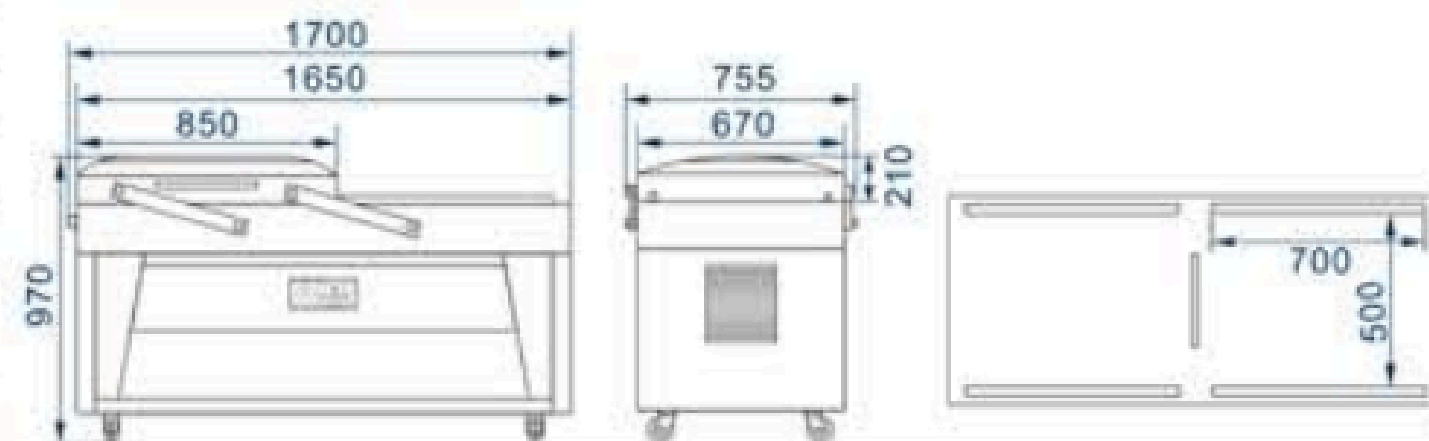

Model	DZ-800-2S
Vacuum Chamber(m ³ /h)	100 / 200 / 300
Power(kw)	5.5
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	920 × 890 × 280
Gross Weight(kg)	757
Net Weight(kg)	650
Shipping Dimensions(mm)	1980 × 1090 × 1300

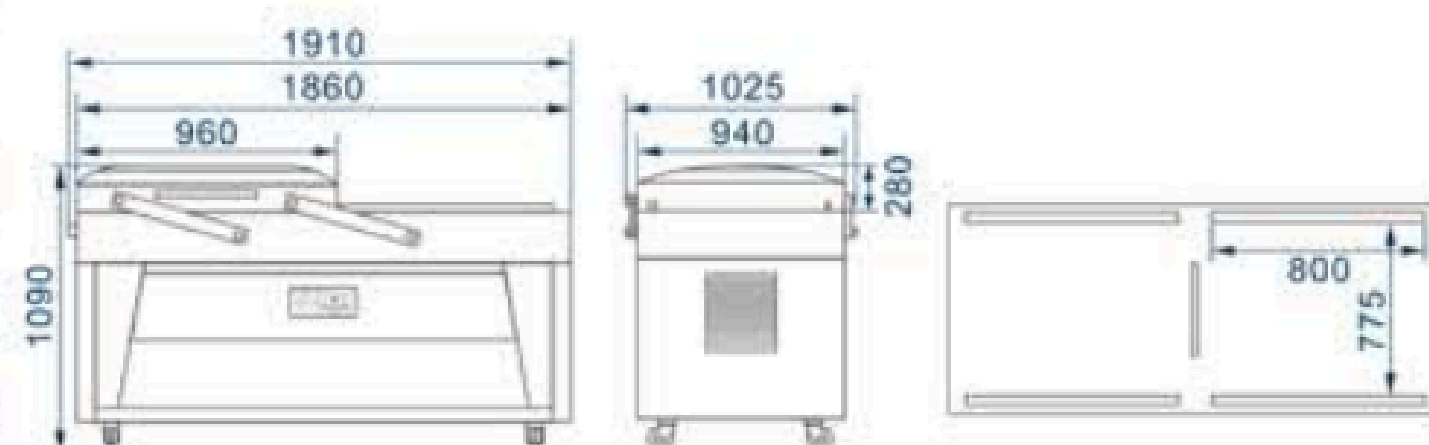


Model	DZ-950-2S
Vacuum Chamber(m ³ /h)	100 / 200 / 300
Power(kw)	5.5
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	1080 × 800 × 190
Gross Weight(kg)	662
Net Weight(kg)	551
Shipping Dimensions(mm)	2300 × 1030 × 1220

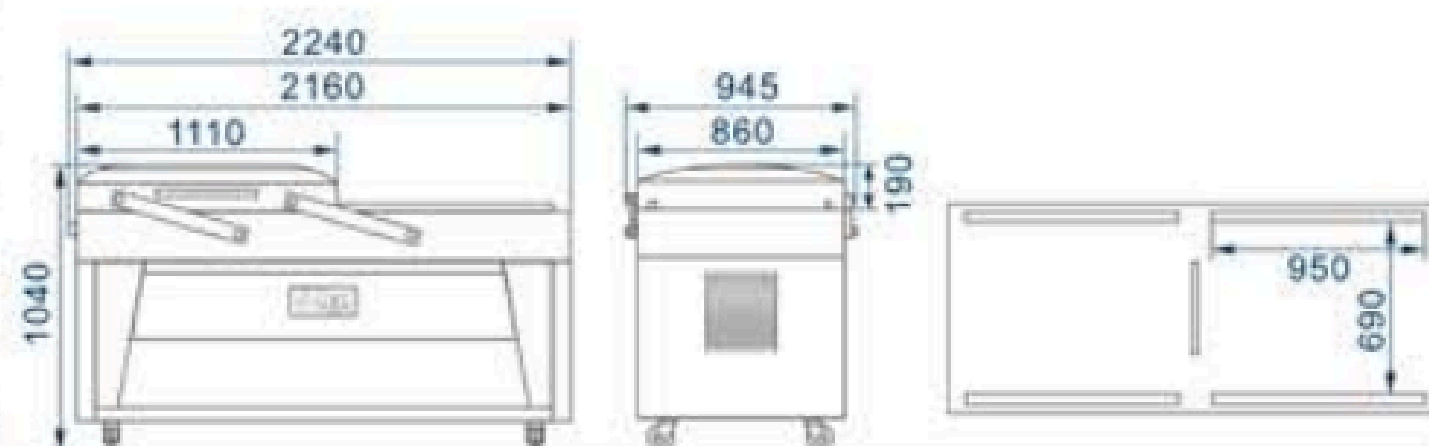


Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
4. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
5. Electrical requirement and plug could be custom according to customer requirement.
6. Gas flushing is optional.

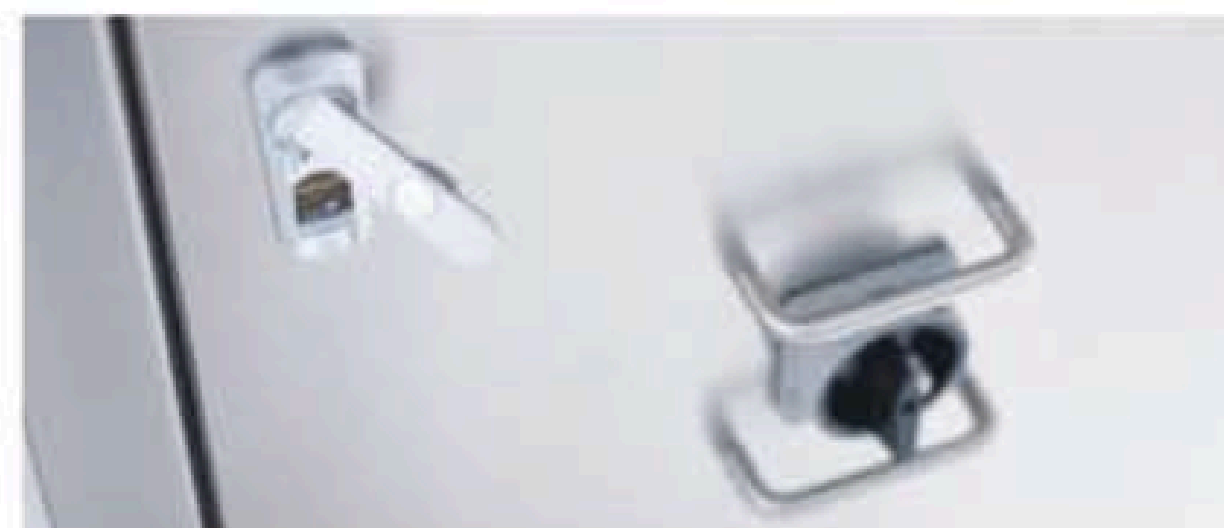

05-06

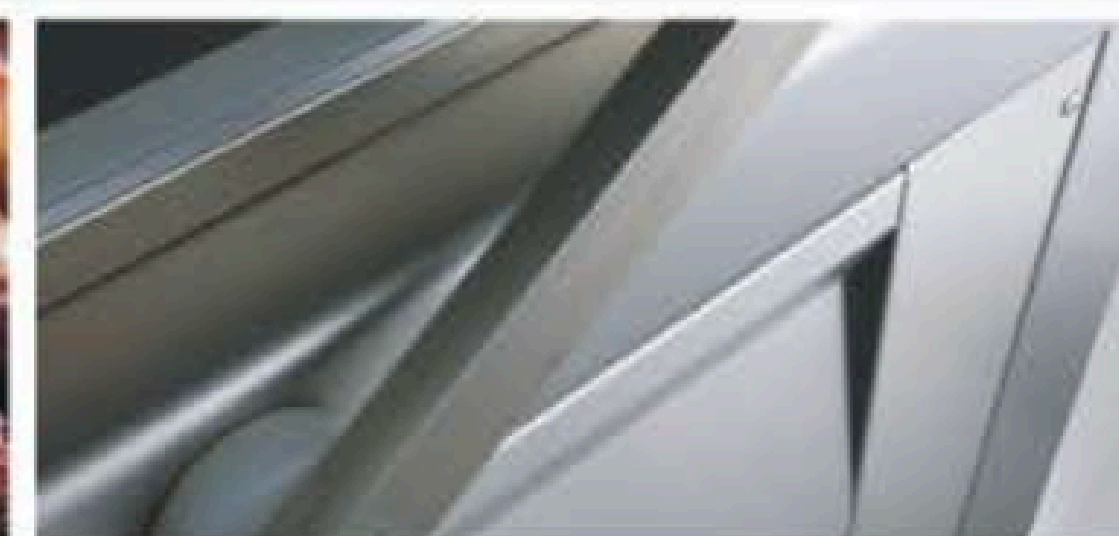



07-08



Copy Right Reserved
Copy Will Be Prosecuted
www.dj-vacuum.com

STAND ALONE VACUUM PACKAGING MACHINE



Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
4. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
5. Electrical requirement and plug could be custom according to customer requirement.
6. Gas flushing is optional.




Model	DZ-800
Vacum Chamber(m³/h)	40 / 63 / 100
Power(kw)	2.2
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	910 × 650 × 200
Gross Weight(kg)	292
Net Weight(kg)	252
Shipping Dimensions(mm)	1030 × 760 × 1120

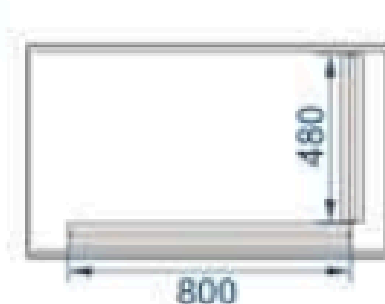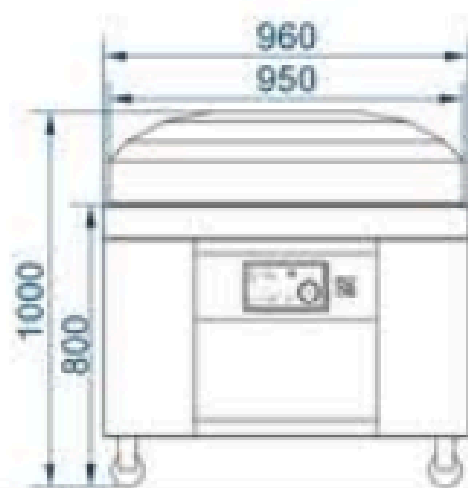

Model	DZ-900
Vacum Chamber(m³/h)	40 / 63 / 100
Power(kw)	2.2
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	1010 × 710 × 200
Gross Weight(kg)	315
Net Weight(kg)	270
Shipping Dimensions(mm)	1150 × 820 × 1120

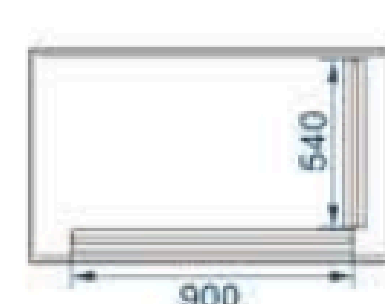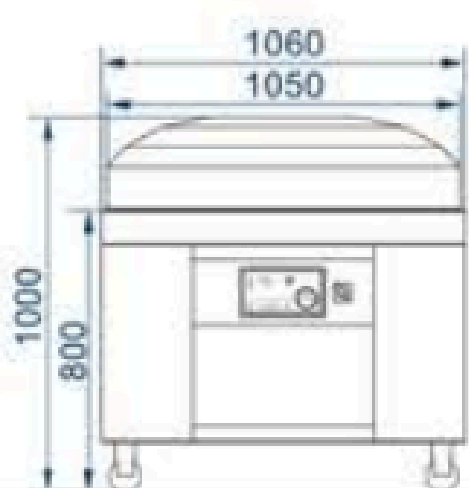

Model	DZ-1000
Vacum Chamber(m³/h)	100 / 200
Power(kw)	2.2
Production Cycle(times/min)	1-2
Vacuum Chamber Dimensions(mm)	1110 × 770 × 200
Gross Weight(kg)	430
Net Weight(kg)	380
Shipping Dimensions(mm)	1195 × 880 × 1120

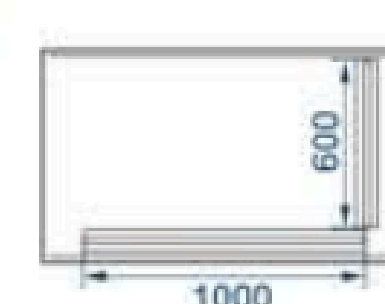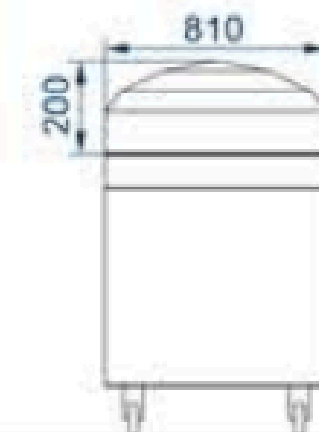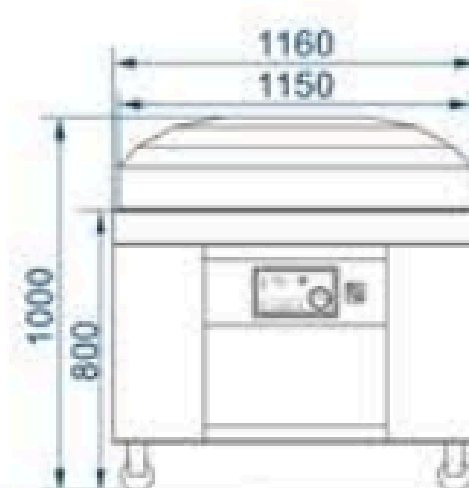

SHRINK TANK

Technical Characters:

1. Stainless Steel Construction.
2. Efficient Electric Heating.
3. Programmable Temperature Control.
4. Simple Push Button Cycle Operation.
5. Easy Access for Cleaning and Maintenance.
6. High Efficiency Insulation for Heating Retention.
7. Easy Fill and Drain Tank.

Model	HW-12	Tank Volume	100
Tank Dimensions(mm)	610 × 380 × 700	Power	12
Machine Dimensions(mm)	1010 × 640 × 1270	Voltage	380
Rise & Fall Plate Dimensions(mm)	600 × 350	Gross Weight	136
Rise & Fall Plate Rise Height(mm)	350	Net Weight	105
Rise & Fall Plate Load Weight(kg)	< 15	Material	304 Stainless Steel



DOUBLE CHAMBER VACUUM PACKAGING MACHINE


Double chamber vacuum packaging machine is developed based on the single chamber stand alone vacuum packaging machines, it's with characteristic of two chambers worked together or alternatively, so as to improve working efficiency. It's easy to operate, clean and maintain. The machines can be equipped with pumps with varying outputs according to individual requirement. The gas flushing processes to guarantee a reproducible packing quality.



09-10

Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. Hinges on Lid: The special labor-saving hinges on the lid markedly reduce the labor intensity of operator in daily work, so that they handle it with ease.
4. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
5. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
6. Electrical requirement and plug could be custom according to customer requirement.
7. Gas flushing is optional.

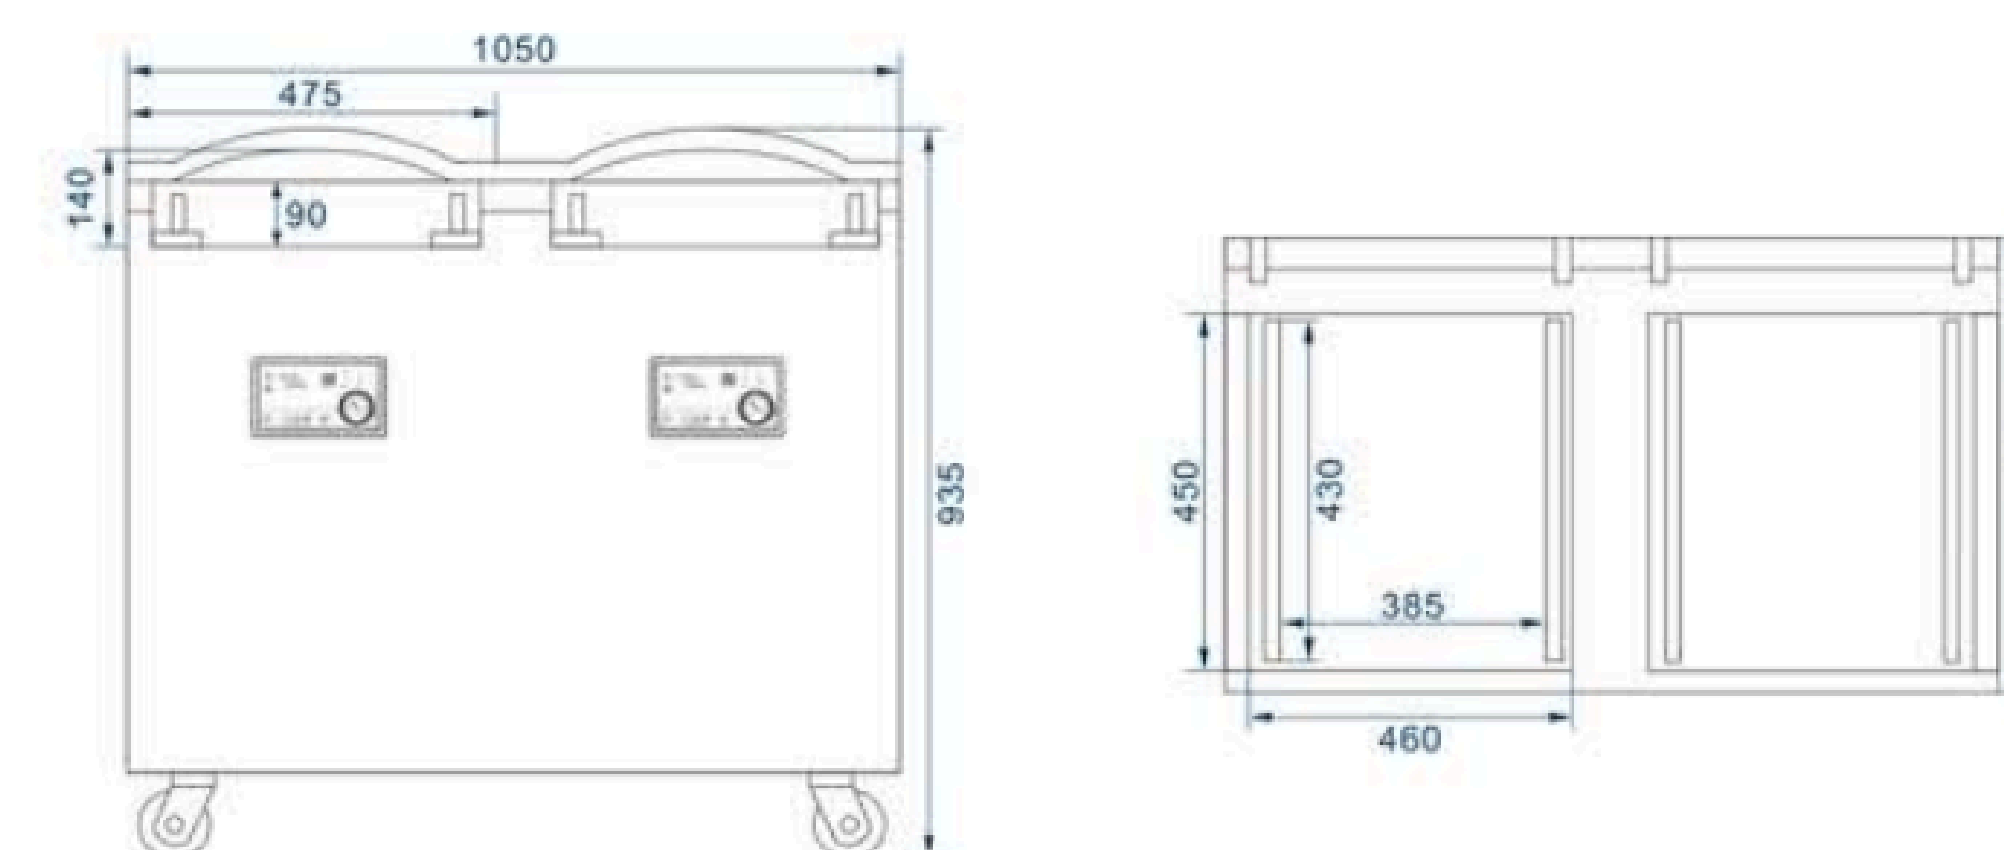

Model	DZ-400/2SF	Gross Weight(kg)	191
Vacuum Chamber(m ³ /h)	20 x 2	Net Weight(kg)	153
Power(kw)	0.75 x 2 / 0.9 x 2	Shipping Dimensions(mm)	1140 x 620 x 1090
Production Cycle(times/min)	1-2		




STAND ALONE VACUUM PACKAGING MACHINE

WENZHOU DAJIANG Stand Alone Vacuum Packaging Machines can be used in a mobile fashion thanks to their movable floor stands and allow for fast relocations. They are also suitable for packaging larger products. It's easy to operate, clean and maintain. The machines can be equipped with pump with varying outputs according to individual requirements. The gas flushing processes to guarantee a reproducible packing quality.


Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. Hinges on Lid: The special labor-saving hinges on the lid markedly reduce the labor intensity of operator in daily work, so that they handle it with ease.
4. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
5. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
6. Electrical requirement and plug could be custom according to customer requirement.
7. Gas flushing is optional.


Model	DZ-400/2E
Vacum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	95
Net Weight(kg)	79
Shipping Dimensions(mm)	610 x 530 x 1050

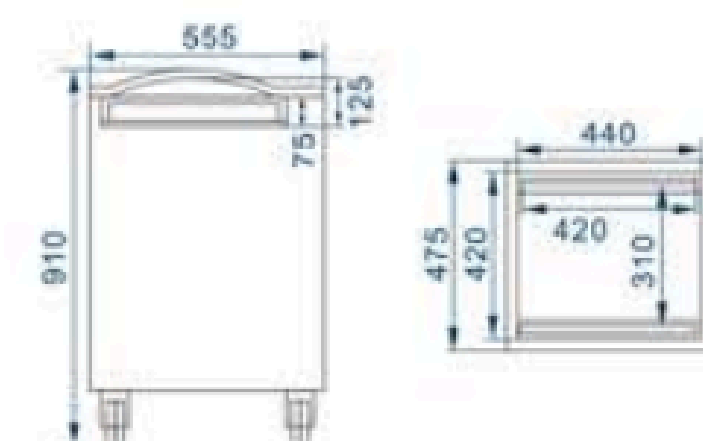


Model	DZ-400CD
Vacum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	116
Net Weight(kg)	93
Shipping Dimensions(mm)	780 x 570 x 1120

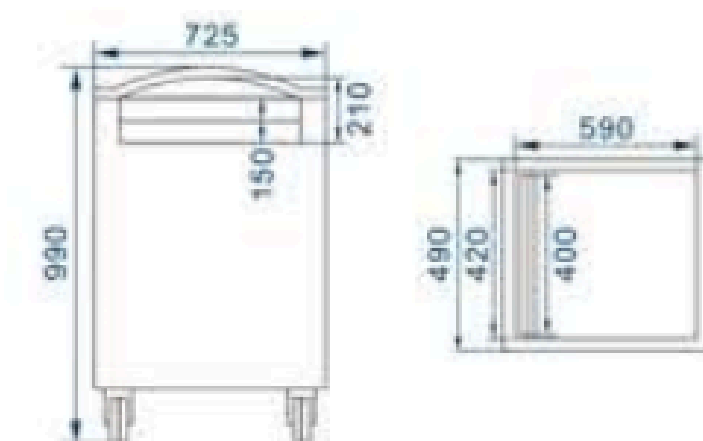


Model	DZ-400GL
Vacum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	96
Net Weight(kg)	75
Shipping Dimensions(mm)	610 x 530 x 1200

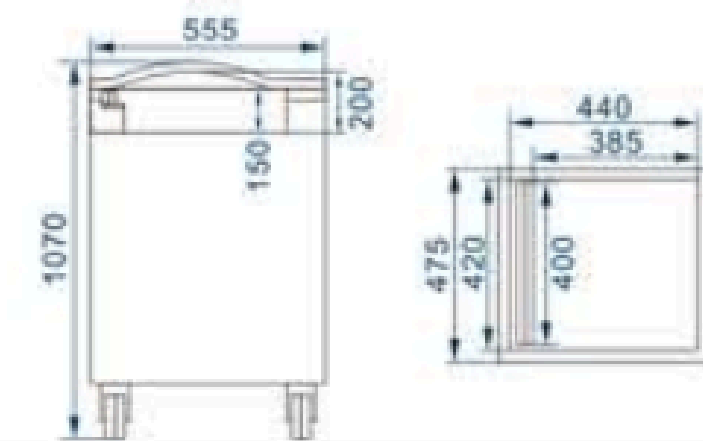

Model	DZ-500B
Vacum Chamber(m ³ /h)	20 / 40
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	125
Net Weight(kg)	98
Shipping Dimensions(mm)	800 x 640 x 1120

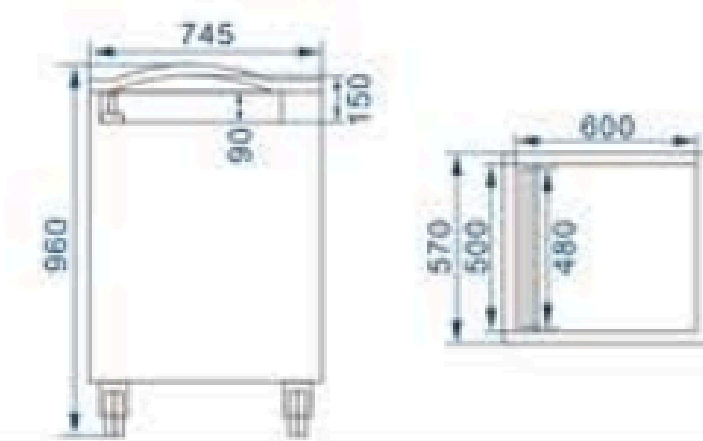



STAND ALONE VACUUM PACKAGING MACHINE


WENZHOU DAJIANG Stand Alone Vacuum Packaging Machines can be used in a mobile fashion thanks to their movable floor stands and allow for fast relocations. They are also suitable for packaging larger products. It's easy to operate, clean and maintain. The machines can be equipped with pumps with varying outputs according to individual requirements. The gas flushing processes to guarantee a reproducible packing quality.

Technical Characters:


1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. Hinges on Lid: The special labor-saving hinges on the lid markedly reduce the labor intensity of operator in daily work, so that they handle it with ease.
4. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
5. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
6. Electrical requirement and plug could be custom according to customer requirement.
7. Gas flushing is optional.




Model	DZ-460/2G
Vacuum Chamber(m ³ /h)	20 / 40 / 63
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	150
Net Weight(kg)	121
Shipping Dimensions(mm)	870 x 690 x 1140

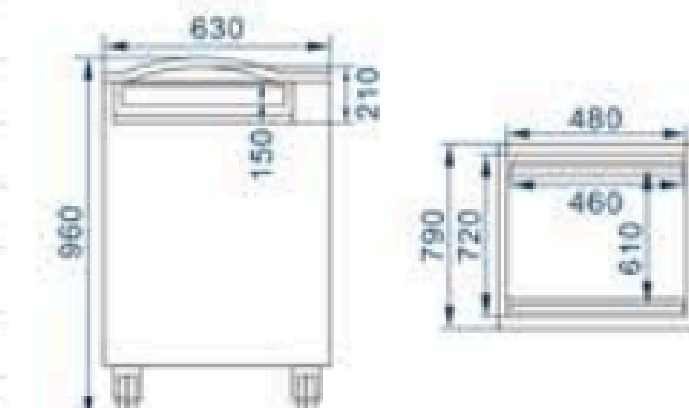


Model	DZ-500/2G
Vacuum Chamber(m ³ /h)	20 / 40 / 63
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	131
Net Weight(kg)	108
Shipping Dimensions(mm)	740 x 660 x 1130

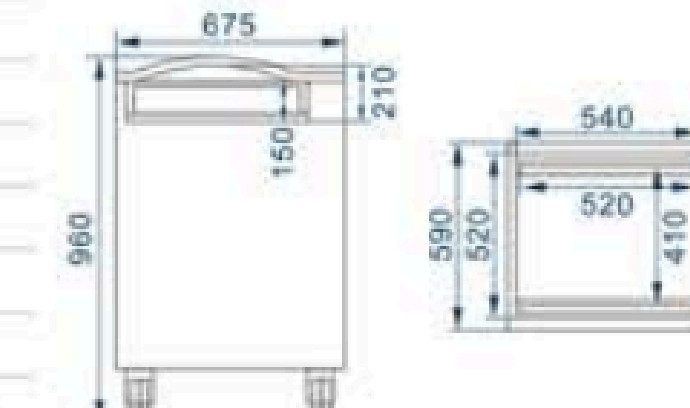

Model	DZ-600/2G
Vacuum Chamber(m ³ /h)	20x2 / 40 / 63
Power(kw)	0.75x2 / 0.9x2
Production Cycle(times/min)	1-2
Gross Weight(kg)	185
Net Weight(kg)	150
Shipping Dimensions(mm)	870 x 870 x 1130

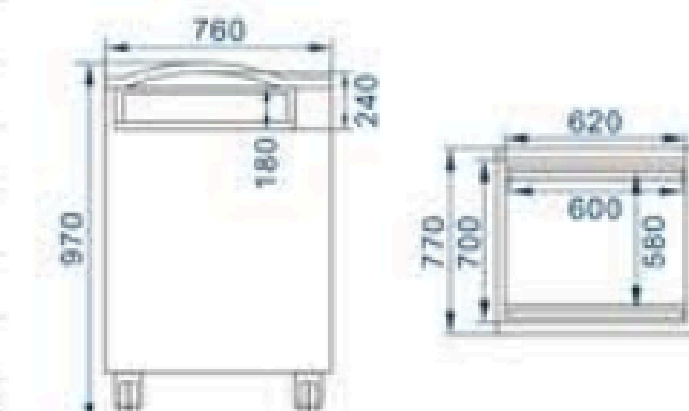



















Model	DZ-700/2ES
Vacuum Chamber(m ³ /h)	20 / 40 / 63
Power(kw)	0.75x2 / 0.9x2
Production Cycle(times/min)	1-2
Gross Weight(kg)	174
Net Weight(kg)	137
Shipping Dimensions(mm)	850 x 890 x 1120

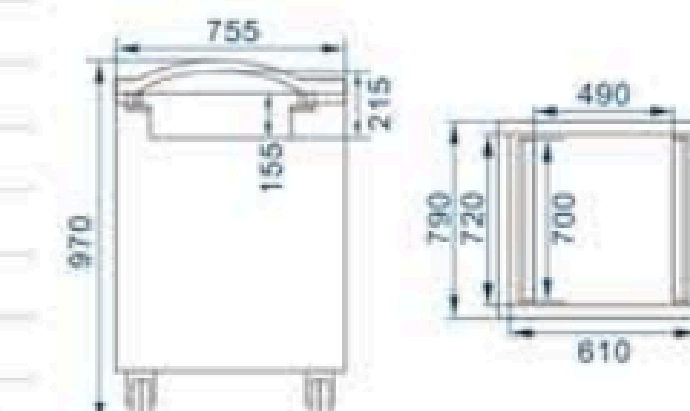



Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. Hinges on Lid: The special labor-saving hinges on the lid markedly reduce the labor intensity of operator in dally work, so that they handle it with ease.
4. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
5. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
6. Electrical requirement and plug could be custom according to customer requirement.
7. Gas flushing is optional.

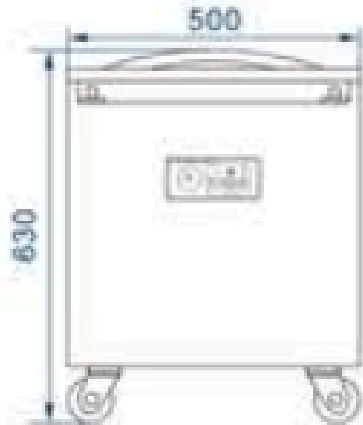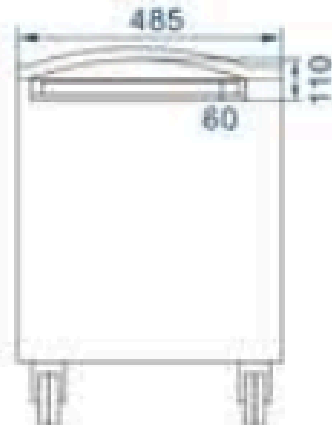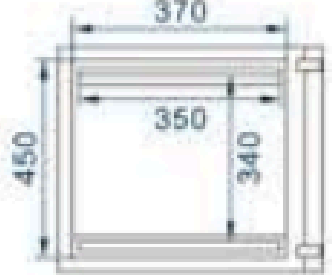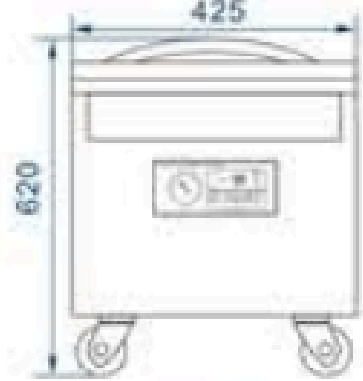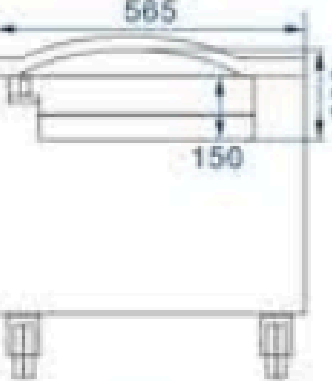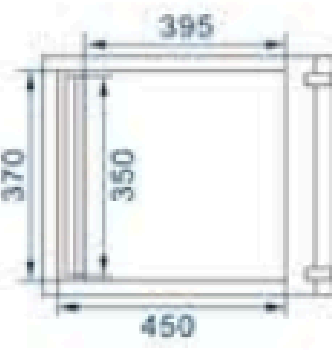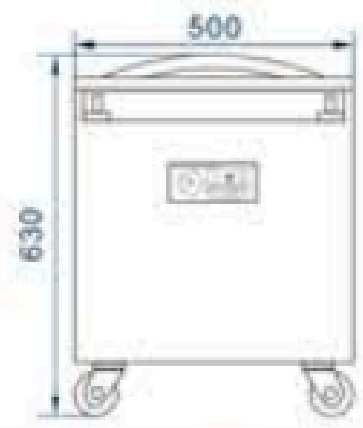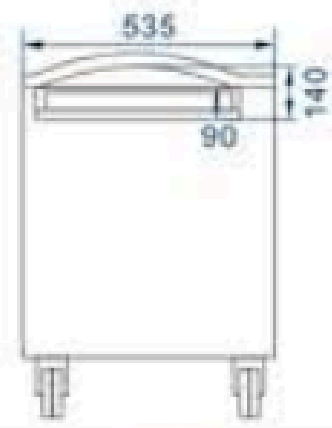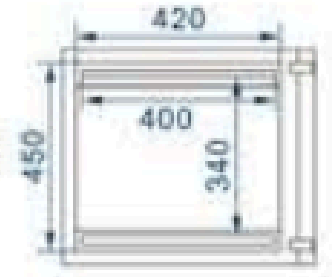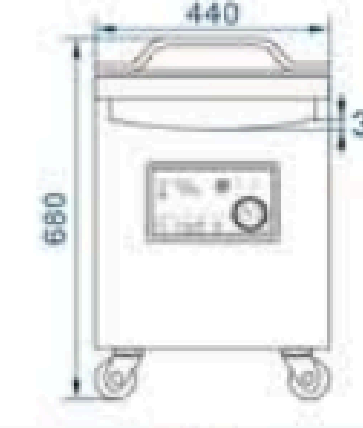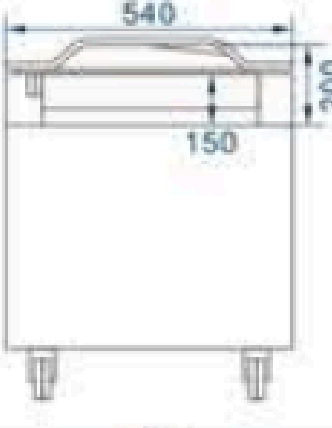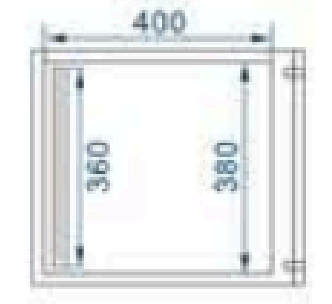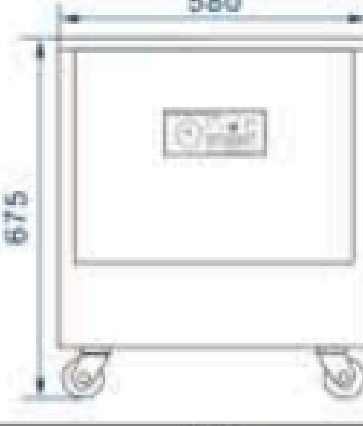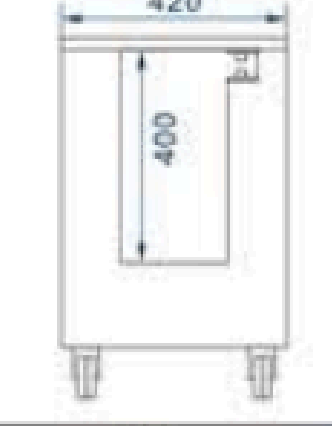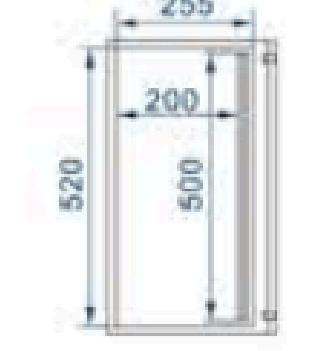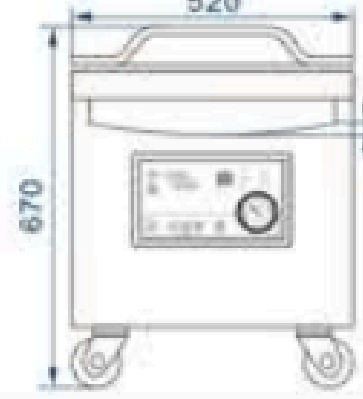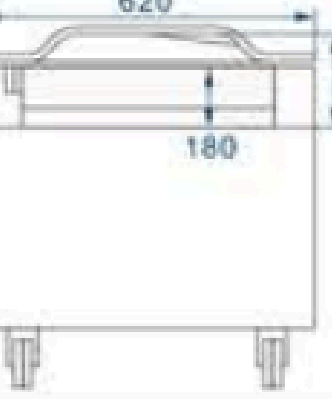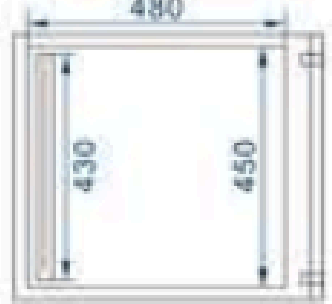Model	DZ-350/2G			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	77			
Net Weight(kg)	64			
Shipping Dimensions(mm)	560 x 550 x 790			
Model	DZ-350GS			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	73			
Net Weight(kg)	58			
Shipping Dimensions(mm)	610 x 490 x 840			
Model	DZ-400/2G			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	82			
Net Weight(kg)	68			
Shipping Dimensions(mm)	590 x 570 x 800			
Model	GK100			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	75			
Net Weight(kg)	57			
Shipping Dimensions(mm)	670 x 570 x 770			
Model	DZ-500C			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	92			
Net Weight(kg)	77			
Shipping Dimensions(mm)	600 x 500 x 760			
Model	GK105			
Vacum Chamber(m³/h)	20			
Power(kw)	0.75 / 0.9			
Production Cycle(times/min)	1-2			
Gross Weight(kg)	86			
Net Weight(kg)	70			
Shipping Dimensions(mm)	680 x 580 x 830			

SEMI-STAND ALONE VACUUM PACKAGING MACHINE

WENZHOU DAJIANG Semi-Stand Alone Vacuum Packaging Machines can be used in a mobile fashion thanks to their movable floor stands and allow for fast relocations. They are also suitable for packaging larger products. It's easy to operate, clean and maintain. The machines can be equipped with pumps with varying outputs according to individual requirements. The gas flushing processes to guarantee a reproducible packing quality.



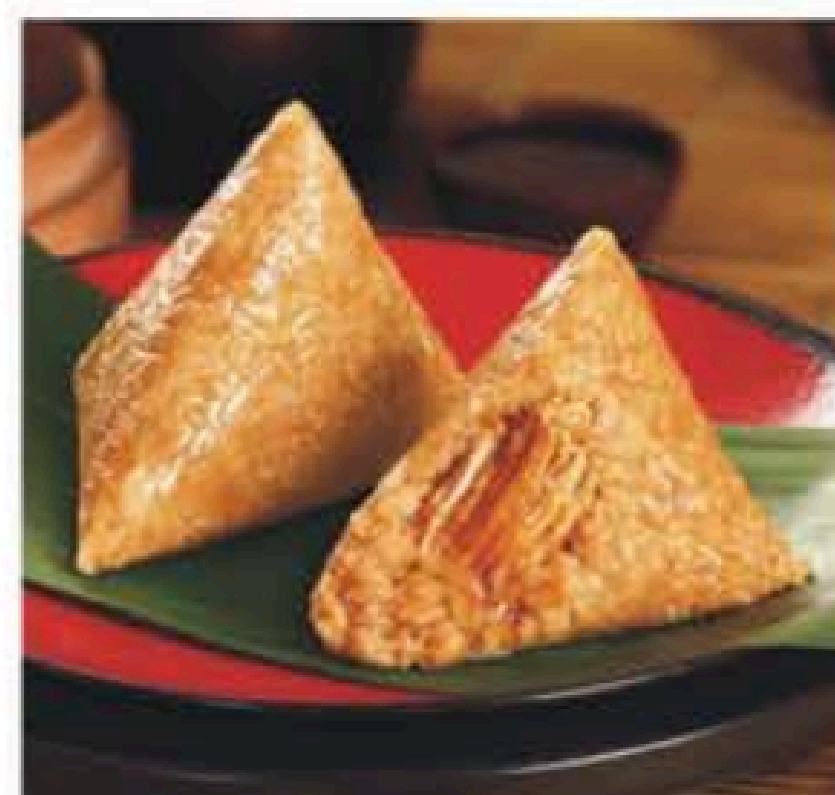


TABLE TOP VACUUM PACKAGING MACHINE


WENZHOU DAJIANG is the first company to specialized in the R&D and manufacture of table top vacuum packaging machines in China when it's established in 1995. The DZ table top vacuum packaging machines series were designed with the user in mind. It's the ideal solution for the quick and easy packaging of smaller products. The gas flushing processes are pressure-controlled and thus guarantee a reproducible packing quality. The table top machines are easy to operate, clean and maintain. It's affordable enough to be purchased simply as a backup while maintaining superior quality that one can rely on during years of heavy use.

Technical Characters:


1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. Hinges on Lid: The special labor-saving hinges on the lid markedly reduce the labor intensity of operator in daily work, so that they handle it with ease.
4. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
5. Electrical requirement and plug could be custom according to customer requirement.
5. Gas flushing is optional.




Model	DZ-260PD
Vacuum Chamber(m ³ /h)	10
Power(kw)	0.37
Production Cycle(times/min)	1-2
Gross Weight(kg)	39
Net Weight(kg)	33
Shipping Dimensions(mm)	560 x 410 x 410

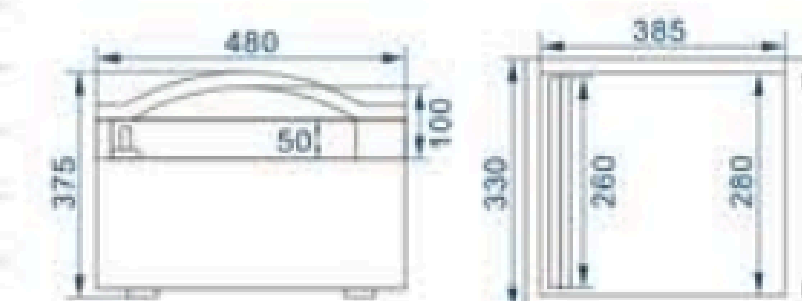


Model	DZ-260/O
Vacuum Chamber(m ³ /h)	10
Power(kw)	0.37
Production Cycle(times/min)	1-2
Gross Weight(kg)	43
Net Weight(kg)	35
Shipping Dimensions(mm)	560 x 410 x 435

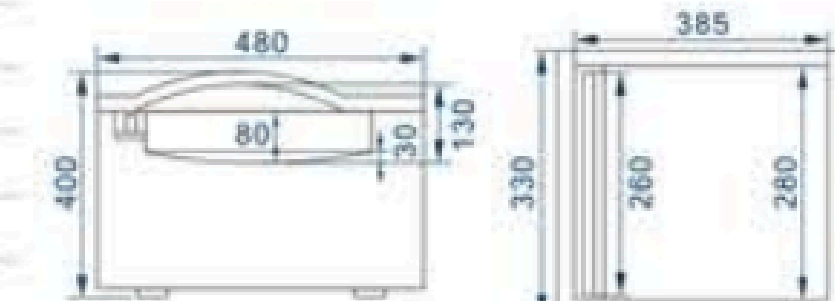


Model	DZ-300PJ
Vacuum Chamber(m ³ /h)	10
Power(kw)	0.37
Production Cycle(times/min)	1-2
Gross Weight(kg)	45
Net Weight(kg)	39
Shipping Dimensions(mm)	560 x 420 x 490

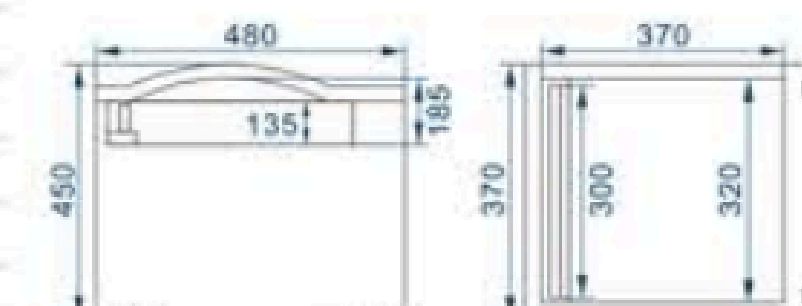


Model	DZ-350M
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	64
Net Weight(kg)	54
Shipping Dimensions(mm)	610 x 490 x 435

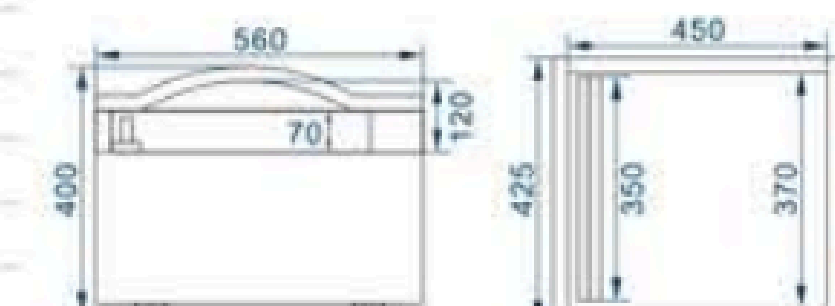


Model	DZ-350MS
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	68
Net Weight(kg)	58
Shipping Dimensions(mm)	610 x 490 x 530

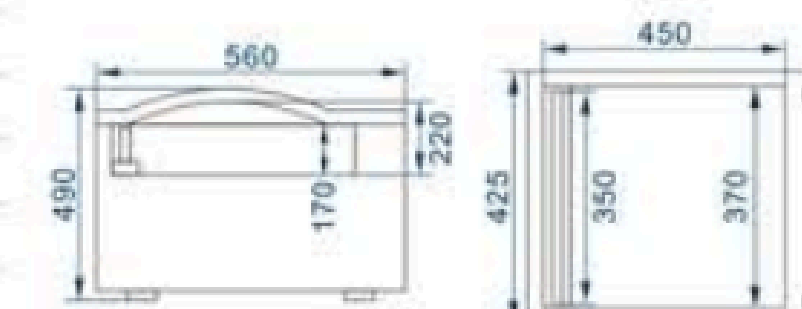


Model	DZ-350MD
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	76
Net Weight(kg)	65
Shipping Dimensions(mm)	670 x 490 x 540

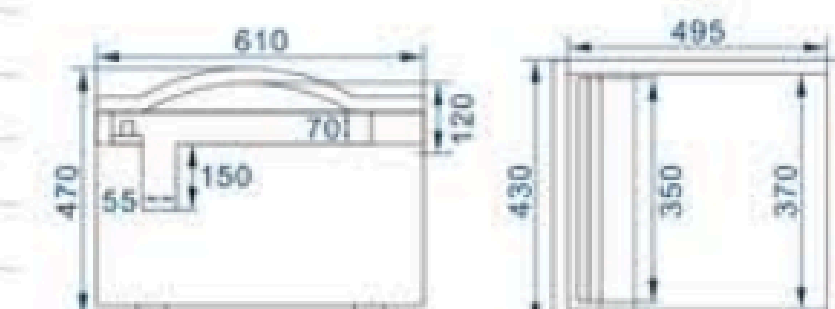


Model	DZ-390T
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	77
Net Weight(kg)	65
Shipping Dimensions(mm)	670 x 530 x 550

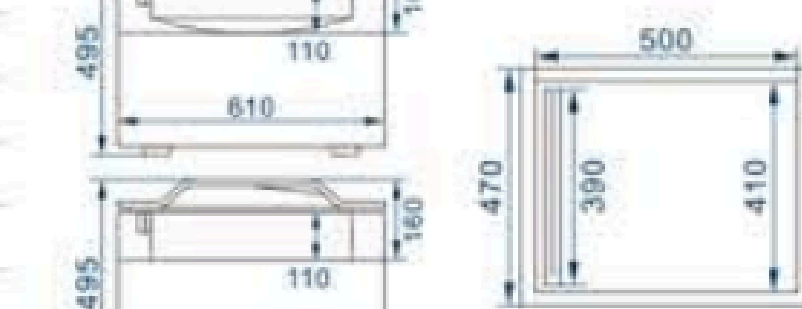


Model	DZ-400/2F
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	68
Net Weight(kg)	59
Shipping Dimensions(mm)	610 x 530 x 460

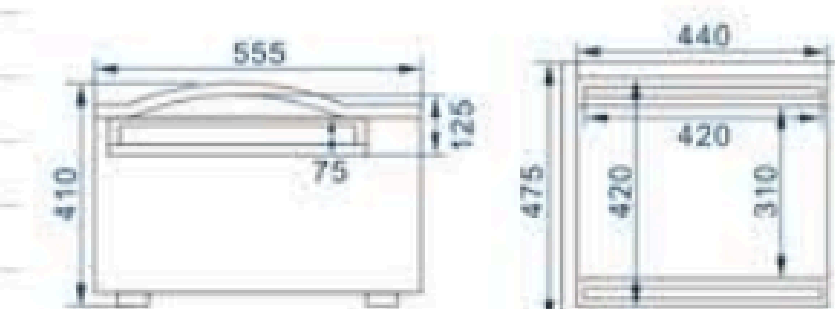


Model	DZ-400N
Vacuum Chamber(m ³ /h)	10
Power(kw)	0.37
Production Cycle(times/min)	1-2
Gross Weight(kg)	52
Net Weight(kg)	43
Shipping Dimensions(mm)	540 x 530 x 435

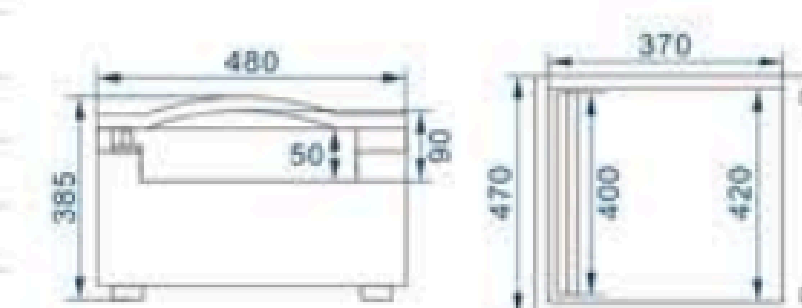


Model	DZ-400G
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	71
Net Weight(kg)	60
Shipping Dimensions(mm)	610 x 530 x 540

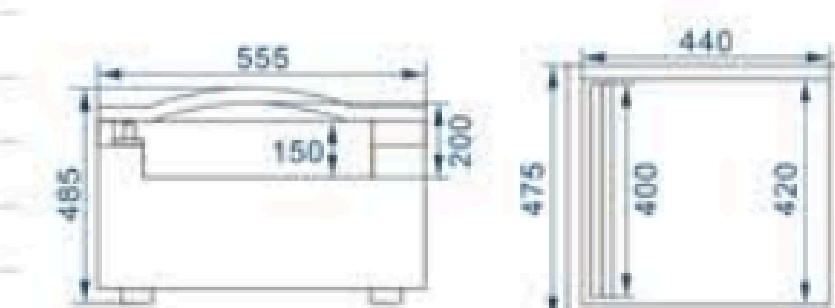


Model	DZ-430PT/2
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	68
Net Weight(kg)	57
Shipping Dimensions(mm)	610 x 490 x 435

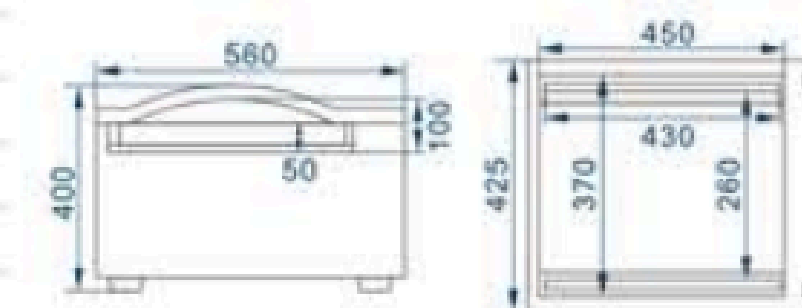


Model	DZ-435PJ
Vacuum Chamber(m ³ /h)	10
Power(kw)	0.37
Production Cycle(times/min)	1-2
Gross Weight(kg)	55
Net Weight(kg)	44
Shipping Dimensions(mm)	570 x 530 x 490

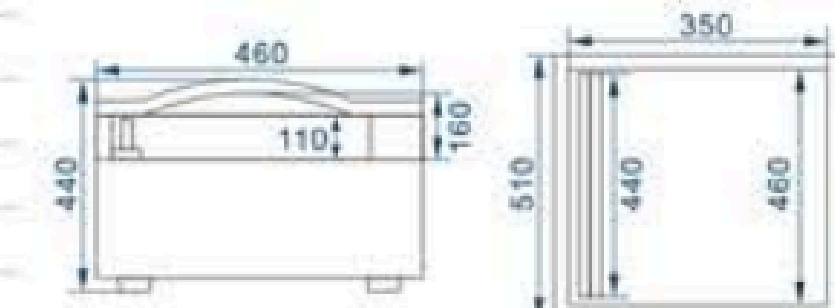

Model	DZ-450A
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	74
Net Weight(kg)	64
Shipping Dimensions(mm)	610 x 570 x 540

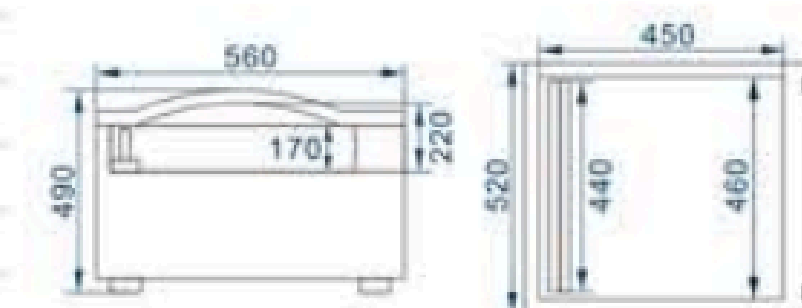

Model	DZ-500T
Vacuum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	106
Net Weight(kg)	87
Shipping Dimensions(mm)	750 x 660 x 560

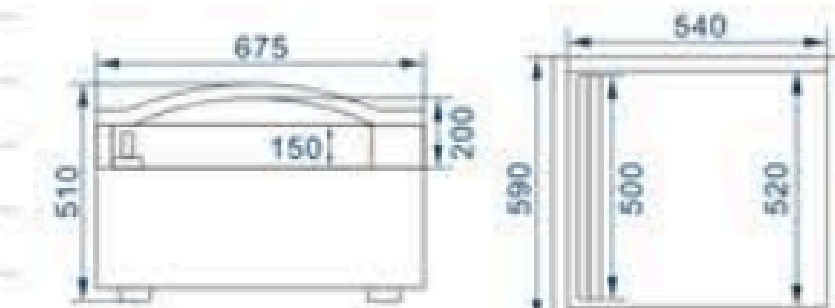



VERTICAL TYPE VACUUM PACKAGING MACHINE

The vertical type vacuum packaging machine is specially designed for packing of vertical contents. It's intended for the vacuum packing of the inner bag in the drum. Contents are put into the vacuum bag in the drum (or a container in other shape) and then placed into the vacuum chamber for packing along with the bag and drum.


Technical Characters:

1. Control System: The PLC control panel provides several control modes for user's selection.
2. Material of Main Structure: 304 stainless steel.
3. "V" Lid Gasket: The "V" shape vacuum chamber lid gasket made of high-density material guarantees the sealing performance of the machine in routine work. The compression and wearing resistance of the material extends the service life of the lid gasket and reduce its changing frequency.
4. Heavy Duty Casters (With Brake): The heavy duty casters (with brake) on the machine features superior load bearing performance, so that the user may move the machine with ease.
5. Electrical requirement and plug could be custom according to customer requirement.
6. Gas flushing is optional.




19-20

Model	DZ-500L
Vacum Chamber(m ³ /h)	20 x 2
Power(kw)	0.75 x 2 / 0.9 x 2
Production Cycle(times/min)	1-2
Gross Weight(kg)	270
Net Weight(kg)	220
Shipping Dimensions(mm)	920 x 630 x 1430

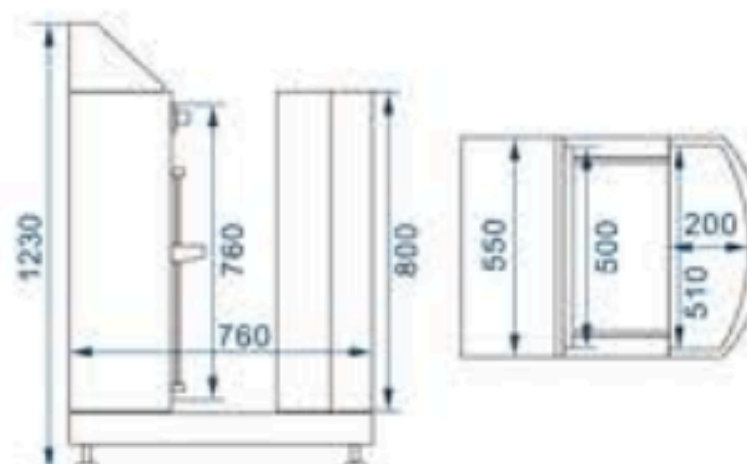

Model	DZ-630L
Vacum Chamber(m ³ /h)	40
Power(kw)	1.1
Production Cycle(times/min)	1-2
Gross Weight(kg)	272
Net Weight(kg)	221
Shipping Dimensions(mm)	1180 x 760 x 1410

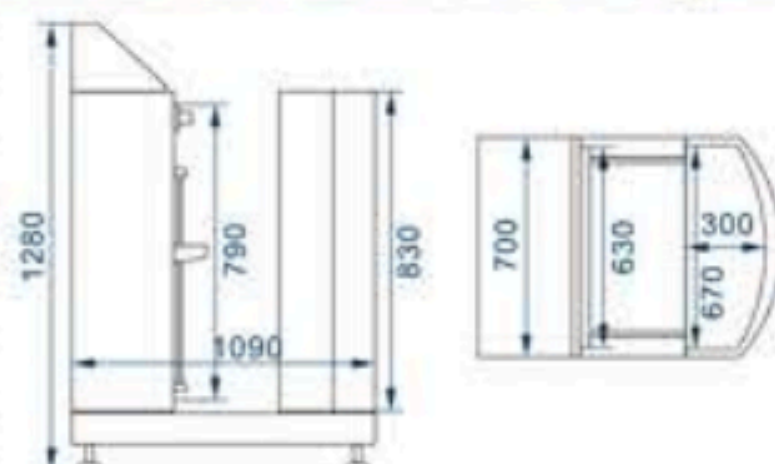

Model	DZ-600L
Vacum Chamber(m ³ /h)	20
Power(kw)	0.75 / 0.9
Production Cycle(times/min)	1-2
Gross Weight(kg)	110
Net Weight(kg)	81
Shipping Dimensions(mm)	740 x 580 x 1390

