



**COTTURA**  
group

**CATALOG 2026**



EASYVAC

目录

商业真空包装机  
Professional lines

|              |   |
|--------------|---|
| DZ-260H/310H | 2 |
| DZ-300T      | 3 |
| DZ-280       | 4 |
| DZ-400E      | 5 |
| DZ-300       | 6 |
| DZ-400       | 7 |

工业真空包装机  
Industrial lines

|                                                          |    |
|----------------------------------------------------------|----|
| DZQ-400/500/600/800                                      | 10 |
| DZQ-600B3                                                | 11 |
| DZ-650KH                                                 | 12 |
| DZQ-600L                                                 | 13 |
| VS-600                                                   | 14 |
| VS-600L                                                  | 15 |
| DZQ-400 2SA/500 2SA/600 2SA                              | 16 |
| DZQ-700 2SA FLAT/850 2SA FLAT/900 2SA DEEP/1000 2SA FLAT | 19 |
| DZQ-600 2SAT                                             | 20 |
| DZQ-850 2SE                                              | 21 |
| DZQ-850S                                                 | 22 |
| DZQ-800C/1000C                                           | 23 |

肉类收缩线  
Shrinking and drying lines

|               |    |
|---------------|----|
| ST-6050       | 26 |
| ST-5030       | 26 |
| ST-8031/10065 | 27 |
| ST-1552       | 28 |
| FG-1554       | 29 |

Table of Contents

保鲜膜机封盒机  
Film wrapping and tray sealing lines

|                 |    |
|-----------------|----|
| iWrap/iWrap pro | 32 |
| HW-450/550      | 33 |
| SY-01/02        | 33 |
| DF-560          | 34 |
| ZT-260          | 35 |
| ZT-480          | 35 |
| QT-700S         | 36 |
| DDLZ-420A/520A  | 39 |

加工和包装设备  
Processing and packaging

|                                    |    |
|------------------------------------|----|
| BI-8L                              | 42 |
| VT-25                              | 42 |
| TD-E pro                           | 42 |
| DFJ-130/130S/130P                  | 43 |
| CSVM-100 (VT-1)                    | 43 |
| MF-50                              | 44 |
| LF-250                             | 44 |
| SPF                                | 45 |
| SLF                                | 45 |
| SPFT-35                            | 46 |
| SLF-2-E                            | 46 |
| BIBF-30(SSBFP-30)                  | 47 |
| BIBF-5000(MSBFP-30)                | 47 |
| PFS-100~500                        | 48 |
| FRN-500~1000                       | 49 |
| PS-450/600                         | 49 |
| FKR-200/300/400/200A/300A/400A     | 50 |
| PFS-350/450/600                    | 51 |
| PFS-DD200/300/400                  | 51 |
| DBF-770W/770WL                     | 52 |
| DBF-810W                           | 52 |
| DGYF-500A/B/C/D                    | 53 |
| LGYF-1500AX-II                     | 53 |
| FM-3028/4535/5540/5540A            | 54 |
| BS-200/250/300LD/400LD/450/550/650 | 55 |
| BS-4525A/4535A                     | 55 |
| HP-130                             | 56 |
| HP-241                             | 56 |
| MY-380                             | 57 |
| HP-450                             | 57 |





## PROFESSIONAL LINES

### PROFESSIONAL RESULTS AT DOMESTIC & COMMERCIAL BUSINESSES

Our Professional Lines, featuring compact benchtop vacuum sealer, is engineered to bring superior quality in food preservation also at domestic and professional settings. Crafted with an emphasis on efficiency, user-friendliness, and compact design, these devices empower everyone to achieve professional-grade results, but with a usage frequency that aligns with the needs of domestic and professional environments like bars, small restaurants, professional kitchens, Supermarkets and boutique catering or deli operations.

Our professional lines vacuum sealer, with an 4/8/20m<sup>3</sup>/h oil lubricated pump, multiple operational modes, and a marinating function, ensures top quality in food preservation. The parameters of the vacuum and sealing cycle can be adjusted at a glance, adapting the operation to every requirement and optimising time, results and consumption.

## HIGHLIGHTS

### 99.9% VACUUM

It is possible to reach the maximum level of vacuum allowed in a very short time, avoiding pump's air condensation and its possible damage by using professional oil pumps.

### WIRELESS WELDING BAR ①

Machines have multiple welding bars without wires, equipped with stainless steel pistons that simplify the cleaning operations and guarantee a total safety during machine use, increasing the quality and the resistance of welding.

### PROGRAMMABLE CYCLES ①

The Professional lines are equipped with 6 programs in which it is possible to preset the vacuum time, welding parameters and one button to start Marinating.

### SEALING SHAPE

The sealing has patterns, M-shaped, suitable for different usage scenarios.

### SOFT AIR ①

It allows you to adjust intensity of the air return flow inside the vacuum chamber avoiding compression of the packaged product.

### GAS FLUSH ①

System that allows packaging delicate and soft products in a modified atmosphere. A mixture of food gases is injected into the vacuum bag through an external side nozzle, ensuring total preservation of the product's shape, consistency and flavor.

① OPTIONAL, please consult our sales for details

**EASYVAC**

VACUUM PACKAGING

DZ-260/310H is a compact and lightweight automatic vacuum packing machine for kitchen equipment with innovative design and high performance. The Polystyrene vacuum chamber and completely stainless steel frame ensures a perfect vacuum in a super-powerful room. Thanks to a sensory vacuum system and a touch panel with 6 preset,digital display ,9 memory programs,it is extremely easy to use. DZ-260/310H perfectly packs products in bags or containers. The transparent tempered glass cover allows better product visibility during packing.




Technical Characters!

- 1.Compact size Light weight
- 2.High-end appearance
- 3.Both household and commercial use
- 4.Vacuum food or pickle food






DZ-260H/310H Table Top Vacuum Packing Machine 台式真空包装机

| 型号 Model                 | DZ-260H       | DZ-310H     |
|--------------------------|---------------|-------------|
| 电源 Voltage(V/Hz)         | 110/220 50-60 |             |
| 功率 Pump power(kw)        | 0.25          |             |
| 密封条 Sealing length(mm)   | 260×6         | 310×6       |
| 真空室尺寸 Chamber size(mm)   | 304×300×85    | 354×300×85  |
| 抽气速率 Pump Capacity(m³/h) | 4             | 4           |
| 外形尺寸 Dimension(mm)       | 360×490×210   | 415×490×210 |
| 重量 Weight(kg)            | ≈ 22          | ≈ 24        |



DZ-300T Table Top Vacuum Packing Machine 台式真空包装机

| 型号 Model                 | DZ-300T       |
|--------------------------|---------------|
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.4           |
| 密封条 Sealing length(mm)   | 300×8         |
| 真空室尺寸 Chamber size(mm)   | 369×420×130   |
| 抽气速率 Pump Capacity(m³/h) | 8             |
| 外形尺寸 Dimension(mm)       | 442×515×390   |
| 重量 Weight(kg)            | ≈ 35          |



DZ-280/400E is an ideal vacuum packing machine for small and flexible industry. Typically selected by butcher shops, hotels. Restaurants, institutions, grocery stores. It is perfect for vacuum packaging your product to extend shelf life,prevent freezer burns and maintain your product in a controlled atmosphere.


Technical Characters!

- 1.Compact sizeLight weight
- 2.High-end appearance
- 3.Both household and commercial use
- 4.Vacuum food or pickle food




DZ-280 Table Top Vacuum Packing Machine 台式真空包装机

|                          |               |
|--------------------------|---------------|
| 型号 Model                 | DZ-280        |
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.4           |
| 密封条 Sealing length(mm)   | 280×8         |
| 真空室尺寸 Chamber size(mm)   | 289×387×70    |
| 抽气速率 Pump Capacity(m³/h) | 8             |
| 外形尺寸 Dimension(mm)       | 365×495×390   |
| 重量 Weight(kg)            | ≈ 35          |

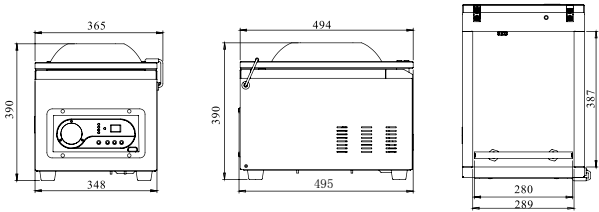

DZ-400E Table Top Vacuum Packing Machine 台式真空包装机

|                          |               |
|--------------------------|---------------|
| 型号 Model                 | DZ-400E       |
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.9           |
| 密封条 Sealing length(mm)   | 400×10        |
| 真空室尺寸 Chamber size(mm)   | 420×420×100   |
| 抽气速率 Pump Capacity(m³/h) | 20            |
| 外形尺寸 Dimension(mm)       | 500×540×495   |
| 重量 Weight(kg)            | ≈ 65          |

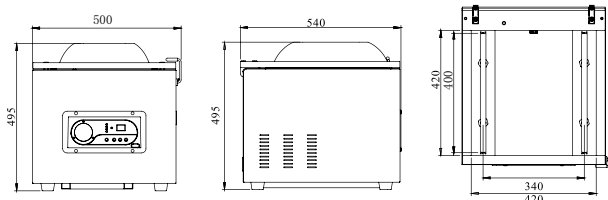

This machine is mainly applied to seal composite film packaging materials. The solid, liquid, powder, paste and other properties of objects can be vacuum packed even insert gas by this machine. Ater vacuum packaging ,products can be prevented oxidation and mildew, food can be kept fresh and it can efecively reduce the products dimension to make it easier to transport and storage. it can be widely used in food, medicine, electronics, chemicals and other field, is a good choice for factories, shops, service industry and so on.


Technical Characters!

- 1.Smart PCB provides several working modes.
- 2. Main structure use 304 stainless steel.
- 3. Reliable vacuum pump,Busch pump is optional.
- 4. Gas insert and oil filter are optional.




DZ-300 Table Top Vacuum Packing Machine 台式真空包装机

|                          |               |
|--------------------------|---------------|
| 型号 Model                 | DZ-300        |
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.4           |
| 密封条 Sealing length(mm)   | 260×8         |
| 真空室尺寸 Chamber size(mm)   | 289×387×50    |
| 抽气速率 Pump Capacity(m³/h) | 8             |
| 外形尺寸 Dimension(mm)       | 365×495×370   |
| 重量 Weight(kg)            | ≈ 34          |

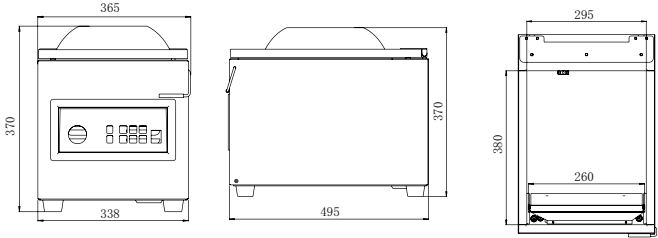

DZ-400 Table Top Vacuum Packing Machine 台式真空包装机

|                          |               |
|--------------------------|---------------|
| 型号 Model                 | DZ-400        |
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.9           |
| 密封条 Sealing length(mm)   | 400×10        |
| 真空室尺寸 Chamber size(mm)   | 435×420×75    |
| 抽气速率 Pump Capacity(m³/h) | 20            |
| 外形尺寸 Dimension(mm)       | 490×540×560   |
| 重量 Weight(kg)            | ≈ 73          |

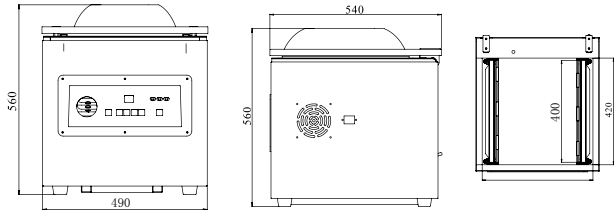

# INDUSTRIAL LINES

## COMBINES SPEED, OUTPUT AND ERGONOMIC DESGIN

Free stand, double chamber and chamber belt vacuum packaging machines satisfy the needs of those who need to pack food in large quantities. These machines are designed for companies operating in various sectors, especially from food processing, meat slaughtering, electronics and mechanics. They allow to speed up the packaging processes thanks to the two standard sealing bars.

Our industrial lines vacuum packaging machines, with an 20/63/100/200m<sup>3</sup>/h oil lubricated pump, multiple operational modes, and a marinating function, ensures top quality in food preservation. The parameters of the vacuum and sealing cycle can be adjusted at a glance, adapting the operation to every requirement and optimising time, results and consumption.

New control panels with membrane keypad without screws or slots create better insulation to external moisture and dust, increasing the life of electronic parts and making cleaning as easy as possible

# HIGHLIGHTS

## 99.9% VACUUM

It is possible to reach the maximum level of vacuum allowed in a very short time, avoiding pump's air condensation and its possible damage by using professional oil pumps.

## WIRELESS WELDING BAR ①

Machines have multiple welding bars without wires, equipped with stainless steel pistons that simplify the cleaning operations and guarantee a total safety during machine use, increasing the quality and the resistance of welding.

## PROGRAMMABLE CYCLES ①

The Professional lines are equipped with 6 programs in which it is possible to preset the vacuum time, welding parameters and one button to start Marinating.

## SEALING SHAPE

The sealing has patterns, M-shaped, suitable for different usage scenarios.

## SOFT AIR ①

It allows you to adjust intensity of the air return flow inside the vacuum chamber avoiding compression of the packaged product.

## GAS FLUSH ①

System that allows packaging delicate and soft products in a modified atmosphere. A mixture of food gases is injected into the vacuum bag through an external side nozzle, ensuring total preservation of the product's shape, consistency and flavor.

## DOUBLE CHAMBER INDIVIDUAL POWER DISTRIBUTION BOX

Dust-proof, moisture-proof and anti-static, with silicone sealing design and high electrical integration.

## ERGONOMIC DESGIN

Effortless swing cover can help workers easily operate the double chamber machines and say goodbye to fatigue caused by long working hours.

## CUSTOMIZED CHAMBER

Support to customize chamber size and depth.  
Flat chamber and concave chamber are optional

① OPTIONAL, please consult our sales for details


**EASYVAC**

VACUUM PACKAGING

This machine is mainly applied to seal composite film packaging materials. The solid, liquid, powder, paste and other properties of objects can be vacuum packed even insert gas by this machine. Ater vacuum packaging ,products can be prevented oxidation and mildew, food can be kept fresh and it can efecively reduce the products dimension to make it easier to transport and storage. it can be widely used in food, medicine, electronics, chemicals and other field, is a good choice for factories, shops, service industry and so on.

Technical Characters!

- 1.Smart PCB provides several working modes.
- 2. Main structure use 304 stainless steel.
- 3. Reliable vacuum pump,Busch pump is optional.
- 4. Gas insert and oil filter are optional.

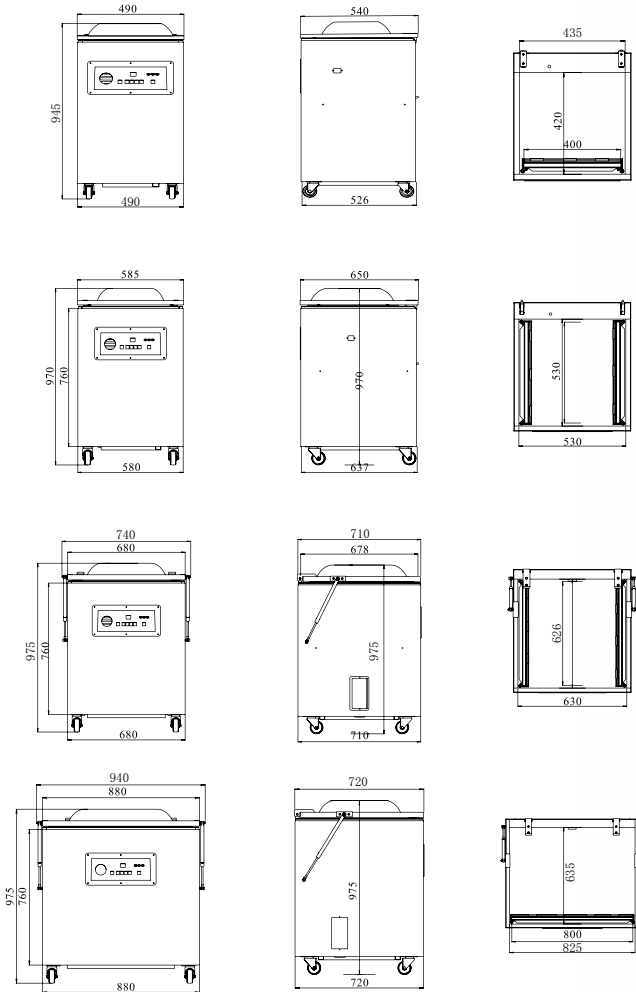

Accept Customization




DZQ-400/500/600/800 Vertical Vacuum Packing Machine 立式真空包装机

| 型号 Model                 | DZQ-400       | DZQ-500       | DZQ-600       | DZQ-800                     |
|--------------------------|---------------|---------------|---------------|-----------------------------|
| 电源 Voltage(V/Hz)         | 110/220 50-60 | 110/220 50-60 | 110/220 50-60 | 110/220 3Phase220/380 50-60 |
| 功率 Pump power(kw)        | 0.9           | 0.9           | 1.8           | 1.8                         |
| 密封条 Sealing length(mm)   | 400×10        | 500×10        | 600×10        | 800×10                      |
| 真空室尺寸 Chamber size(mm)   | 435×420×75    | 530×530×75    | 630×626×95    | 825×635×100                 |
| 抽气速率 Pump Capacity(m³/h) | 20            | 20            | 20×2          | 20×2                        |
| 外形尺寸 Dimension(mm)       | 490×540×945   | 585×650×970   | 740×710×975   | 940×720×975                 |
| 重量 Weight(kg)            | ≈ 80          | ≈ 105         | ≈ 145         | ≈ 175                       |

DZQ-600B3 Vertical Vacuum Packing Machine 立式真空包装机

| 型号 Model                 | DZQ-600B3                   |
|--------------------------|-----------------------------|
| 电源 Voltage(V/Hz)         | 110/220 3Phase220/380 50-60 |
| 功率 Pump power(kw)        | 1.8                         |
| 密封条 Sealing length(mm)   | 600×10(×3)                  |
| 真空室尺寸 Chamber size(mm)   | 760×628×120                 |
| 抽气速率 Pump Capacity(m³/h) | 20×2 / 100                  |
| 外形尺寸 Dimension(mm)       | 885×720×975                 |
| 重量 Weight(kg)            | ≈ 165                       |

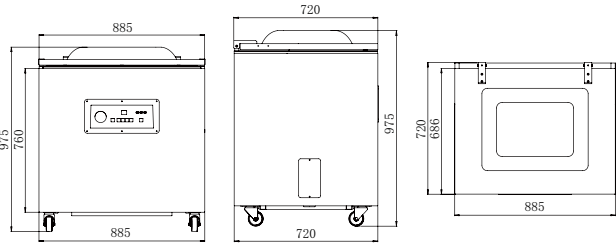


Rice vacuum packing machine can vacuum rice package and shape it square and flat.  
The lid can close automatically by pressing the start button  
The transparent lid allows you to see clearly during packaging.  
This machine is an ideal option for grain bean and powder product as well.




DZ-650KH Rice vacuum packing machine 大米真空包装机

| 型号 Model                 | DZ-650KH      |
|--------------------------|---------------|
| 电源 Voltage(V/Hz)         | 220/380 50-60 |
| 功率 Pump power(kw)        | 1.8           |
| 密封条 Sealing length(mm)   | 650×10        |
| 真空室尺寸 Chamber size(mm)   | 740×610×100   |
| 抽气速率 Pump Capacity(m³/h) | 20×2          |
| 外形尺寸 Dimension(mm)       | 860×700×940   |
| 重量 Weight(kg)            | ≈ 225         |

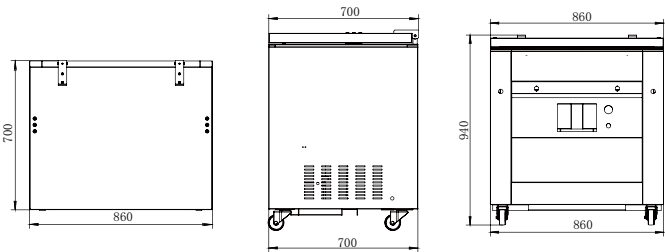

DZQ-600L Vertical Chamber Vacuum Packing Machine 立式真空包装机


| 型号 Model                 | DZQ-600L                   |
|--------------------------|----------------------------|
| 电源 Voltage(V/Hz)         | 220/380 50-60              |
| 功率 Pump power(kw)        | 1.8                        |
| 密封条 Sealing length(mm)   | 600×10                     |
| 真空室尺寸 Chamber size(mm)   | 674×620×300(without cover) |
| 抽气速率 Pump Capacity(m³/h) | 20×2                       |
| 外形尺寸 Dimension(mm)       | 782×752×1105               |
| 重量 Weight(kg)            | ≈ 180                      |

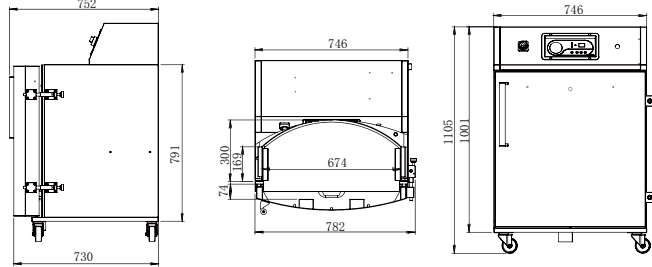




VS-600 External Vacuum Packing Machine 外抽式真空包装机

| 型号 Model                 | VS-600        |
|--------------------------|---------------|
| 电源 Voltage(V/Hz)         | 110/220 50-60 |
| 功率 Pump power(kw)        | 0.9           |
| 密封条 Sealing length(mm)   | 600×10        |
| 抽气速率 Pump Capacity(m³/h) | 20            |
| 外形尺寸 Dimension(mm)       | 640×480×1010  |
| 重量 Weight(kg)            | ≈ 80          |

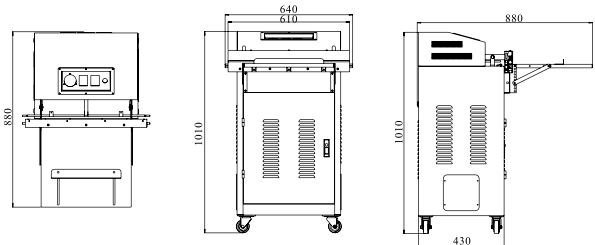

VS-600L External Vacuum Packing Machine 外抽式真空包装机

| 型号 Model                 | VS-600L                     |
|--------------------------|-----------------------------|
| 电源 Voltage(V/Hz)         | 110/220 3Phase220/380 50-60 |
| 功率 Pump power(kw)        | 0.9                         |
| 密封条 Sealing length(mm)   | 600×10                      |
| 抽气速率 Pump Capacity(m³/h) | 20                          |
| 外形尺寸 Dimension(mm)       | 1710×700×700                |
| 重量 Weight(kg)            | ≈ 100                       |

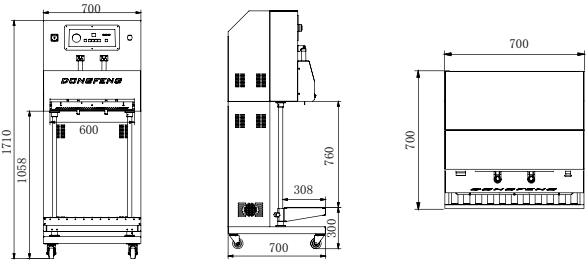

DZQ series double chambers vacuum packaging machine is suitable for vacuum sealing all kinds of heat-sealed packages. The products after packing can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh for long storage. It is an ideal vacuum packing machine for big and flexible industry,typically selected by butcher shops, hotels. Restaurants, institutions, grocery stores.

Technical Characters!

- 1.Effortless ild swing
- 2.Fast and easy maintain
- 3.Water proof electrical box
- 4.Suitable for food processing plant

DZQ-400 2SA/500 2SA/600 2SA  
Double chamber Vacuum Packing Machine 双室真空包装机

| 型号 Model                 | DZQ-400 2SA                   |
|--------------------------|-------------------------------|
| 电源 Voltage(V/Hz)         | 110/220 3Phase 220/380 50-60  |
| 功率 Pump power(kw)        | 0.9/1.8 3Phase 3/2.2          |
| 密封条 Sealing length(mm)   | 400×10                        |
| 真空室尺寸 Chamber size(mm)   | 450 x 465 x 50(without cover) |
| 抽气速率 Pump Capacity(m³/h) | 20-100                        |
| 外形尺寸 Dimension(mm)       | 1025×610×970                  |
| 重量 Weight(kg)            | ≈ 135                         |
| 型号 Model                 | DZQ-500 2SA                   |
| 电源 Voltage(V/Hz)         | 110/220 3Phase 220/380 50-60  |
| 功率 Pump power(kw)        | 1.8 3Phase 3/2.2              |
| 密封条 Sealing length(mm)   | 500×10                        |
| 真空室尺寸 Chamber size(mm)   | 565×535×50(without cover)     |
| 抽气速率 Pump Capacity(m³/h) | 40-100                        |
| 外形尺寸 Dimension(mm)       | 1254×680×995                  |
| 重量 Weight(kg)            | ≈ 175                         |
| 型号 Model                 | DZQ-600 2SA                   |
| 电源 Voltage(V/Hz)         | 110/220 3Phase 220/380 50-60  |
| 功率 Pump power(kw)        | 1.8 3Phase 3/2.2              |
| 密封条 Sealing length(mm)   | 600×10                        |
| 真空室尺寸 Chamber size(mm)   | 662×546×50(without cover)     |
| 抽气速率 Pump Capacity(m³/h) | 40-100                        |
| 外形尺寸 Dimension(mm)       | 1460×690×960                  |
| 重量 Weight(kg)            | ≈ 205                         |








**DZQ-700 2SA FLAT/850 2SA FLAT/900 2SA DEEP/1000 2SA FLAT**  
Double chamber Vacuum Packing Machine 双室真空包装机

| 型号 Model                 | DZQ-700 2SA FLAT     |
|--------------------------|----------------------|
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60 |
| 功率 Pump power(kw)        | 3                    |
| 密封条 Sealing length(mm)   | 700×10               |
| 真空盖尺寸 Cover size(mm)     | 900×700×210          |
| 抽气速率 Pump Capacity(m³/h) | 40-100/BUSCH OPTION  |
| 外形尺寸 Dimension(mm)       | 1760×810×1115        |
| 重量 Weight(kg)            | ≈ 325                |
| 型号 Model                 | DZQ-850 2SA FLAT     |
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60 |
| 功率 Pump power(kw)        | 4                    |
| 密封条 Sealing length(mm)   | 850×10               |
| 真空盖尺寸 Cover size(mm)     | 1050×830×210         |
| 抽气速率 Pump Capacity(m³/h) | 200/300/BUSCH OPTION |
| 外形尺寸 Dimension(mm)       | 2060×940×1115        |
| 重量 Weight(kg)            | ≈ 510                |
| 型号 Model                 | DZQ-900 2SA DEEP     |
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60 |
| 功率 Pump power(kw)        | 4                    |
| 密封条 Sealing length(mm)   | 900×10               |
| 真空室尺寸 Chamber size(mm)   | 1000×850×350         |
| 抽气速率 Pump Capacity(m³/h) | 200/300/BUSCH OPTION |
| 外形尺寸 Dimension(mm)       | 2145×1100×1155       |
| 重量 Weight(kg)            | ≈ 550                |
| 型号 Model                 | DZQ-1000 2SA FLAT    |
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60 |
| 功率 Pump power(kw)        | 4                    |
| 密封条 Sealing length(mm)   | 1000×10              |
| 真空盖尺寸 Cover size(mm)     | 1200×880×210         |
| 抽气速率 Pump Capacity(m³/h) | 200/300/BUSCH OPTION |
| 外形尺寸 Dimension(mm)       | 2360×990×1115        |
| 重量 Weight(kg)            | ≈ 625                |

DZQ-850/2SA double chambers vacuum packaging machine is suitable for vacuum sealing all kinds of heat-sealed packages. The products after packing can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh for long storage. It is an ideal vacuum packing machine for big and flexible industry,typically selected by butcher shops, hotels. restaurants, institutions, grocery stores.





Technical Characters!

- 1.BUSCH pump is optional
- 2.Pneumatic open/close cover
- 3.Water proof electrical box
- 4.PLC control
- 5.Suitable for food processing plant

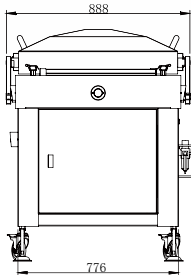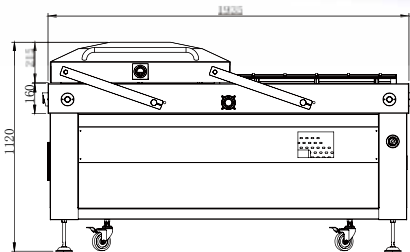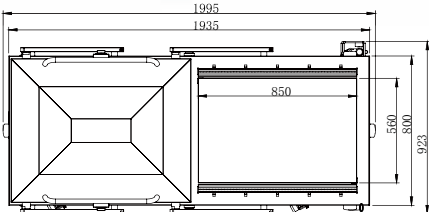

DZQ-850 2SE Double chamber Vacuum Packing Machine  
双室真空包装机

| 型号 Model                        | DZQ-850 2SE          |
|---------------------------------|----------------------|
| 电源 Voltage(V/Hz)                | 3Phase 380 50-60     |
| 功率 Pump power(kw)               | 4kw 10A              |
| 密封条 Sealing length(mm)          | 850×10               |
| 真空盖尺寸 Cover Size(mm)            | 965×770×210          |
| 抽气速率 Pump Capacity(m³/h)        | 200/300/BUSCH OPTION |
| 气源 Air source(Mpa)              | 0.6                  |
| 密封频次 Work efficiency(times/min) | 5-8                  |
| 外形尺寸 Overall Dimension(mm)      | 1995×923×1120        |
| 重量 Weight(kg)                   | ≈ 655                |

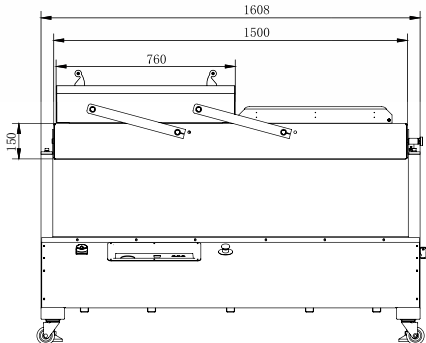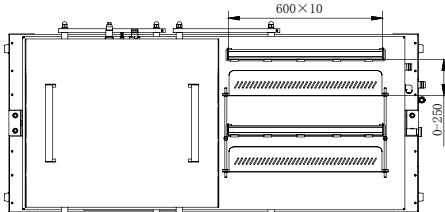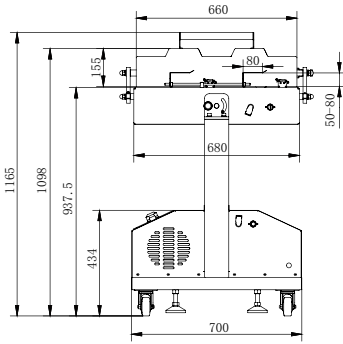

DZQ-600 2SAT Double chamber Vacuum Packing Machine  
翻转式双室真空包装机

| 型号 Model                 | DZQ-600 2SAT         |
|--------------------------|----------------------|
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60 |
| 功率 Pump power(kw)        | 1.8                  |
| 密封条 Sealing length(mm)   | 600×10               |
| 真空室尺寸 Chamber size(mm)   | 600×250×100          |
| 抽气速率 Pump Capacity(m³/h) | 40-100               |
| 外形尺寸 Dimension(mm)       | 1620×795×1165        |
| 重量 Weight(kg)            | ≈ 200                |

DZQ-850S vacuum packing machine is the ideal solution for the automated packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infeed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.


Technical Characters!

- 1.High speed production
- 2.Hygienic design for easy cleaning
- 3.Reliable use with a wide range of pouch materials
- 4.Individual selection of vacuum pumps and equipment
- 5.High level of flexibility and pack quality



DZQ-850S Chamber Belt Vacuum Packing Machine 传输式真空包装机


|                                 |                     |
|---------------------------------|---------------------|
| 型号 Model                        | DZQ-850S            |
| 电源 Voltage(V/Hz)                | 3Phase 380 50-60    |
| 功率 Power(kw/A)                  | 4kw 10A             |
| 密封条 Sealing size(mm)            | 850mm M type 2 seal |
| 密封间距 Sealing distance(mm)       | 500                 |
| 真空盖尺寸 Vacuum Cover Size(mm)     | 850×500×250         |
| 抽气速率 Pump Capacity(m³/h)        | 200                 |
| 尺寸 dimensions(mm)               | 940×885×1205        |
| 密封频次 Work efficiency(times/min) | 3-5                 |
| 气源 Air source                   | 0.6MPA              |
| 重量 Weight(kg)                   | ≈ 270               |

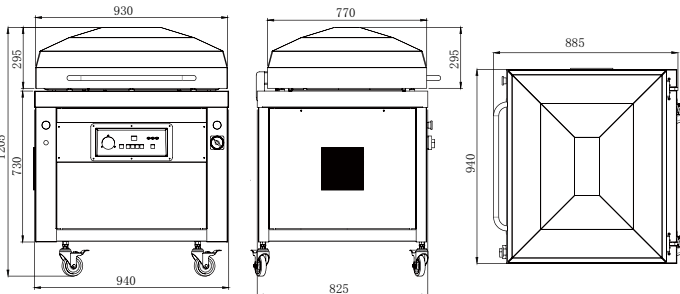

DZQ-800C is the ideal solution for the automatic packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infeed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.

Technical Characters!

- 1.High speed production
- 2.Digital electronic control that can be operated intuitively
- 3.Hygienic design for easy cleaning
- 4.Reliable use with a wide range of pouch materials
- 5.Individual selection of vacuum pumps and equipment
- 6.High level of flexibility and pack quality

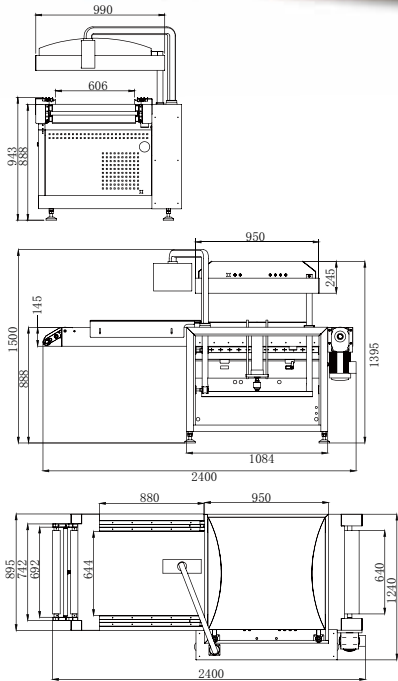

DZQ-800C/1000C Chamber Belt Vacuum Packing Machine 传输式真空包装机

|                                 |                                                         |
|---------------------------------|---------------------------------------------------------|
| 型号 Model                        | DZQ-800C/1000C                                          |
| 电源 Voltage(V/Hz)                | 3Phase 380 50-60                                        |
| 功率 Pump power(kw)               | 6/7                                                     |
| 密封条 Sealing length(mm)          | Max.800×10/1000×10                                      |
| 真空盖尺寸 Vacuum Cover Size(mm)     | 900×860×250/1100×860×250                                |
| 抽气速率 Pump Capacity(m³/h)        | 200/300/BUSCH OPTION                                    |
| 密封频次 Work efficiency(times/min) | 1-4                                                     |
| 模式 Sealing option               | 单 / 双 封口 / 封口 + 封切<br>Single/Double Seal / Seal And Cut |
| 外形尺寸 Dimension(mm)              | 2400×1240×1500/2800×1240×1500                           |
| 重量 Weight(kg)                   | ≈ 700/ ≈ 750                                            |

# SHRINKING AND DRYING LINES

## YOUR BENEFITS

Shrinking and drying units from EasyVac guarantee perfect results with minimal temperature penetration and optimized energy consumption. They are easy to operate and very precise in their control. For optimum productivity, they fit seamlessly into new or existing production environments.

The different operating principles of DONGFENG shrink units enable individual capacity and production flow requirements to be adapted perfectly. Shrink tanks or tunnels can easily be combined with vacuum packaging machines and drying units to form automatic lines.

## VACUUM

Place the product into a vacuum heat-shrink bag, and then perform vacuum packaging using a large double-chamber vacuum packaging machine or a conveyor-type vacuum packaging machine.

## SHRINK TANKS

Complete submersing of products for perfectly hot water homogeneous shrink results  
No transport conveyor between the packaging machine and the shrinking unit required

Suitable for medium-sized and large products, no flat or floating products

## SHRINK TUNNEL

Products are sprayed with hot water in continuous running

No Transport conveyor between packaging machine and shrink unit required

Suitable for all product sizes within the scope of the machine dimensions

## DRYING TUNNEL

Products are dried in continuous running by several fans with cold air

Option of automatic height control of the upper nozzles

Residual moisture depends on the product geometry, throughput speed, and the selected blower output

Suitable for all product sizes within the scope of the machine dimensions

Light products require a reduction in the air-blowing capacity

**EASYVAC**

VACUUM PACKAGING

ST series Dip/shrink tank is a versatile shrinking unit which is an ideal extension for chamber machines, not only with regard to operability and design. It's constructed of a high-quality stainless steel. The movement of the product support and the heating could be done electrically. The heavy duty casters (with brake) on the machine suitable for mobile use.




ST-5030 Hot Water Dipping Machine 手动热水收缩机

| 型号 Model           | ST-5030        |
|--------------------|----------------|
| 电源 Voltage(V/Hz)   | 220 50-60      |
| 容量 capacity(L)     | ≈ 25           |
| 外形尺寸 Dimension(mm) | MAX578×331×272 |
| 重量 Weight(kg)      | 9              |

Technical Characters!

- 1. Stainless Steel Construction.
- 2. Efficient Electric Heating.
- 3. Programmable Temperature Control.
- 4. Simple Push Button Cycle Operation.
- 5. Easy Access for Cleaning and Maintenance.

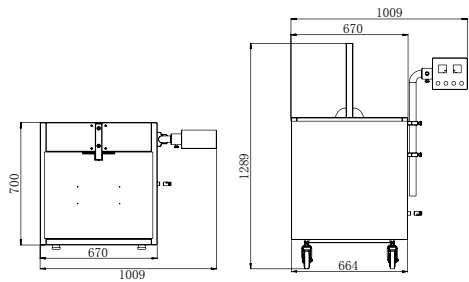

ST-6050 Hot Water Dip Tanks 热水收缩机


| 型号 Model                   | ST-6050                                                              |                          |             |
|----------------------------|----------------------------------------------------------------------|--------------------------|-------------|
| 电源 Voltage(V)              | 220 3Phase 220/380 50-60                                             | 水箱 Water tank (m³)       | 0.14        |
| 功率 Power(kw)               | 12 12 /14                                                            | 水箱尺寸 Tank dimension (mm) | 600×500×500 |
| 温度 Temperrature(°C )       | 0-99°C Adjustable                                                    | 材质 Material              | SUS304      |
| 模式 Control                 | Auto/Manual                                                          | 最大装载 Maxload(kg)         | 100         |
| 自动 Automatic               | 0-99 Seconds adjustable up and down time,start with autocmatic cycle |                          |             |
| 手动 Manual                  | Jog up and down function                                             |                          |             |
| 升降 Travel (mm)             | 330                                                                  |                          |             |
| 低液位保护 Low level protection | Stop heating when the level is low,and the light will shine          |                          |             |

DZQ-800C + ST-8031 machines are the ideal solution for the automated packaging of large batches in film pouches. Our vacuum machines are impressive in their high level of production, output, and pack quality - even when used under maximum load in non-stop mode. The products are loaded by the automatic product infeed conveyor and are decoupled from the packaging process. Combined with semi-automatic pouch loading, shrinking, and drying units, a whole packaging line can be produced from a single source.



Technical Characters!

- 1. High speed production
- 2.Digital electronic control that can be operated intuitively
- 3.Hygienic design for easy cleaning
- 4.Reliable use with a wide range of pouch materials
- 5.Individual selection of vacuum pumps and equipment
- 6.High level of flexibility and pack quality

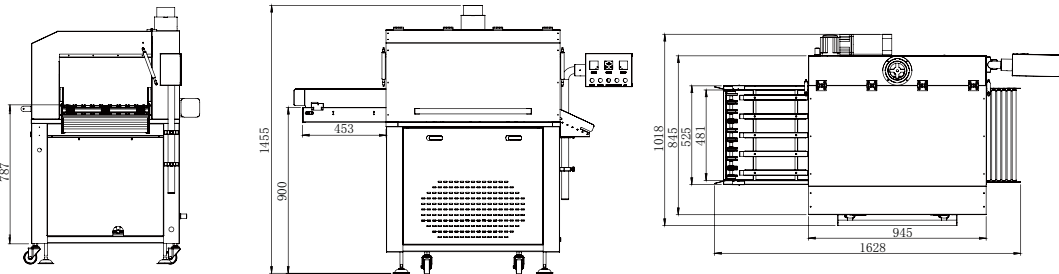


ST-8031/10065 Hot Water Shrink Tunnel 隧道式热水收缩机

| 型号 Model                        | ST-8031          | ST-10065         |
|---------------------------------|------------------|------------------|
| 电源 Voltage(V/Hz)                | 3Phase 380 50-60 | 3Phase 380 50-60 |
| 功率 Power(kw)                    | 21               | 36               |
| 水箱尺寸 Water tank size(mm)        | 840×627×480      | 1040×825×500     |
| 工作频次 Work efficiency(times/min) | 1-6              | 1-6              |
| 外形尺寸 Dimension(mm)              | 1935×1018×1455   | 1988×1216×1455   |
| 重量 Weight(kg)                   | ≈ 278            | ≈ 380            |




ST-1552 Hot Water Shrink Tunnel 水幕式热水收缩机

|                       |                  |
|-----------------------|------------------|
| 型号 Model              | ST-1552          |
| 电源 Voltage(V/Hz)      | 3Phase 380 50-60 |
| 功率 Power(kw)          | 36               |
| 装载 Load(kg)           | Max.30           |
| 速度 Speed(m/min)       | 0-15             |
| 水箱 Water tank (L)     | Max.550          |
| 炉道尺寸 Furnace Size(mm) | 1500×600×260     |
| 外形尺寸 Dimension(mm)    | 2025×900×1775    |
| 重量 Weight(kg)         | ≈ 460            |

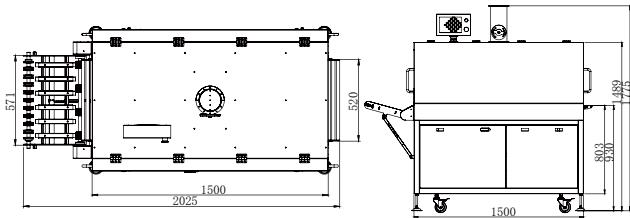

FG-1554 Air Dryer 包装除水机

|                                |                  |
|--------------------------------|------------------|
| 型号 Model                       | FG-1554          |
| 电源 Voltage(V/Hz)               | 3Phase 380 50-60 |
| 功率 Power(kw)                   | 6                |
| 输送线宽度 Conveying line width(mm) | 530              |
| 风量 Air volume(m³/h)            | 360              |
| 传输速度 Speed(m/s)                | 0-10             |
| 外形尺寸 Dimensions(mm)            | 1630X900X1695    |
| 重量 Weight(kg)                  | ≈ 400            |

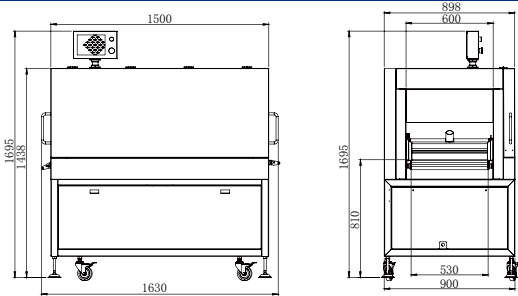



# FILM WRAPPING AND TRAY SEALING LINES

FRIENDLY IN USE, HYGIENIC & EFFECTIVE IN SAVING CONSUMABLES

## CLING FILM WRAPPER

The S900 cling film wrapper can pack a variety of different products such as fruit vegetable meat eggs mushroom sea food and ready meals. Different products require different packaging methods with tray or without tray. With an average of 12 packs per minute, the packaging efficiency is about three times than manual. It can help you increase productivity and reduce consumption of consumables.

## TRAY SEALER

Fast and safe sealing is the eternal pursuit of fast food or take-out restaurants. We provide you with two different types of equipment. One is a manual model, which is suitable for small scale business. The other is a roTray double-station model, which can achieve automatic sealing by manually rotating the lunch box station. If you have a very large demand for packaging, this is your best choice.

## SKIN VACUUM SEALER

When you think of high-quality foods such as meat, sausages, fish, seafood, poultry, and cheese, one thing is clear: they place a wide variety of different demands on the packaging. The liquid should never be allowed to escape, and the package has to protect the product from external influences. Skin packs are ideally suited to meet these needs. They enclose your product like a second skin. The upper web holds the content tightly and free of tension. The shape is maintained to the greatest possible extent. The product is sealed over its entire surface on a rigid lower web or a pre-made tray with a special skin film. Your product can be presented suspended, standing, or lying flat at POS without it slipping.

## MAP AND THERMOFORMING LINES

Modified Atmosphere Packaging (MAP) or thermoforming is the latest innovation in healthy foods and ready meals. They are widely used for packaging ready meals, fruits, salmon, seafood, meats, steaks, cheeses, fruits, vegetables, and more. By preserving food quality and keeping the food stable in the tray, they enhance consumer appeal. Additionally, oxygen, carbon dioxide, and nitrogen can be proportionally injected into the tray using a gas mixer, extending shelf life and maintaining freshness. The vacuum gas-flush sealing technology ensures that the taste and ingredients of the food remain at their freshest state.

Our stretch film wrapping machines, tray sealers, skin vacuum packaging machines, and Modified Atmosphere Packaging (MAP) equipment can all be selected based on production volume to determine the most suitable machine for completing the packaging process.

**EASYVAC**

VACUUM PACKAGING

The iWarp cling film wrapper can pack a variety of different products such as fruit vegetable meat mushroom and ready meals.

With an average of 10 packs per minute, the packaging efficiency is about three times than manual.it can help you increase productivity and reduce consumables

it works with tray or without tray



iWarp/iWarp pro Wrapping Machine 自动保鲜膜机

| 型号 Model                |               | iWarp/iWarp pro                |                            |
|-------------------------|---------------|--------------------------------|----------------------------|
| 电源 Voltage(V/Hz)        |               | 110/220 50-60                  |                            |
| 功率 Power(kw)            | 0.8           | 薄膜宽度 Width of film(mm)         | 250-450/350-550            |
| 包装频次 Capacity           | 10-15pcs/min  | 卷膜直径 Diameter of film roll(mm) | <160mm                     |
| 包装长度 Package length(mm) | 80-280/80-350 | 外形尺寸 Dimension(mm)             | 696×665×1010/785×1030×1210 |
| 包装宽度 Package width(mm)  | 90-200/90-270 | 重量 Weight(kg)                  | 90/110                     |
| 包装高度 Package height(mm) | 10-150/10-170 |                                |                            |



HW-450/550 Hand Wrapper 保鲜膜机

| 型号 Model                | HW-450        | HW-550      |
|-------------------------|---------------|-------------|
| 电源 Voltage(V/Hz)        | 110/220 50-60 |             |
| 功率 Pump power(kw)       | 0.3           | 0.4         |
| 切割长度 Cutting length(mm) | 450           | 550         |
| 包装尺寸 Dimension(mm)      | 640×540×180   | 650×640×180 |
| 重量 Weight(kg)           | 7.5           | 8.5         |



SY-01



SY-02

SY-01/02 Manual Tray Sealer 封盒机

| 型号 Model           | SY-01/02             |
|--------------------|----------------------|
| 电源 Voltage(V/Hz)   | 1Phase 110/220 50-60 |
| 功率 Pump power(kw)  | 0.5                  |
| 包装尺寸 Tray Size(mm) | 200×140(custom)      |
| 外形尺寸 Dimension(mm) | 565×238×265          |
| 重量 Weight(kg)      | ≈ 20                 |



**DF-560** Modified atmosphere box sealing machine  
可换模具气调封盒机

| 型号 Model                   | DF-560                            |
|----------------------------|-----------------------------------|
| 电源 Voltage(V/Hz)           | 380V/220V/110V 50/60Hz(optional)  |
| 功率 Power(kw)               | 6KW                               |
| 气源压力 Pressure(Mpa)         | 0.6-0.8                           |
| 包装能力 Efficiency(times/min) | 2~3                               |
| 气体置换率 Replacement rate     | 99.5% or higher                   |
| 气体环境 Result                | Vacuum / filling 2~3 kinds of gas |
| 真空泵 Capacity(m³/h)         | 65/100(optional)                  |
| 托盘分布 Pallet distriution    | One box, two boxes, four boxes    |
| 外形尺寸 Dimensions(mm)        | 990×850×1605                      |
| 重量 Weight(kg)              | ≈ 430                             |



**ZT-260** Skin Vacuum Tray Sealer 手压贴体机

| 型号 Model                 | ZT-260               |
|--------------------------|----------------------|
| 电源 Voltage(V/Hz)         | 1Phase 110/220 50-60 |
| 功率 Power(kw)             | 1.5                  |
| 抽气速率 Pump Capacity(m³/h) | 4                    |
| 包装尺寸 Tray Size(mm)       | 250×170×20(custom)   |
| 外形尺寸 Dimension(mm)       | 515×404×389          |
| 重量 Weight(kg)            | 25                   |




**ZT-480** Skin Vacuum Tray Sealer 旋转式贴体机

| 型号 Model                        | ZT-480                                        |
|---------------------------------|-----------------------------------------------|
| 电源 Voltage(V/Hz)                | 3Phase 220/380 50-60                          |
| 功率 Power(kw)                    | 9                                             |
| 抽气速率 Pump Capacity(m³/h)        | 100                                           |
| 密封频次 Work efficiency(times/min) | 1-4                                           |
| 包装形式 Result                     | 封口 / 充气封口 / 贴体<br>Seal/Gas insert/Skin Vacuum |
| 包装尺寸 Tray Size(mm)              | 260×180×25(custom)                            |
| 外形尺寸 Dimension(mm)              | MAX.1290×1330×1455                            |
| 净重 Net Weight(kg)               | ≈ 450                                         |


ZT-480 is a semi-automatic equipment focusing on vacuum skin packaging of raw fresh meat, fruit and frozen product. Vacuum skin packaging is also known as 3D packaging – a whole new form of retail packaging. During the packing process, the pack film lies onto products’ surface like a piece of skin membrane. Not only deose this technic displays the most original appearance of the product, it also perverse the quality. color and freshness to the highest standard.

#### Technical Characters!

1. 2 stations work in turns
- 2.High speed production
- 3.PLC control High-end appearance

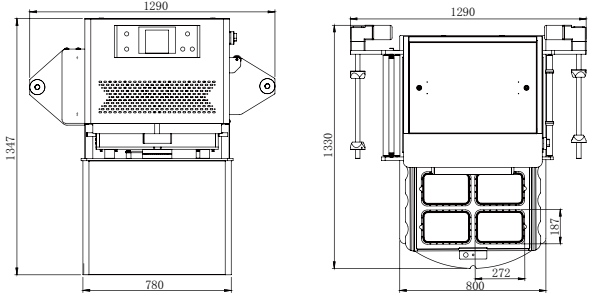

MAP is the latest healthy Foods and Ready Meals innovation. They are widely to be used to pack ready meal, fruit, salmon fish, seafood, meat, beef steak, cheese, fruit, vegetables etc. Boosts consumer appeal by preserving food quality and keeping food stationary in the tray. Removing the oxygen preserves the food to extend the shelf life of the product. Vacuum-sealed technology ensures that the food taste and ingredients are captured at their freshest.

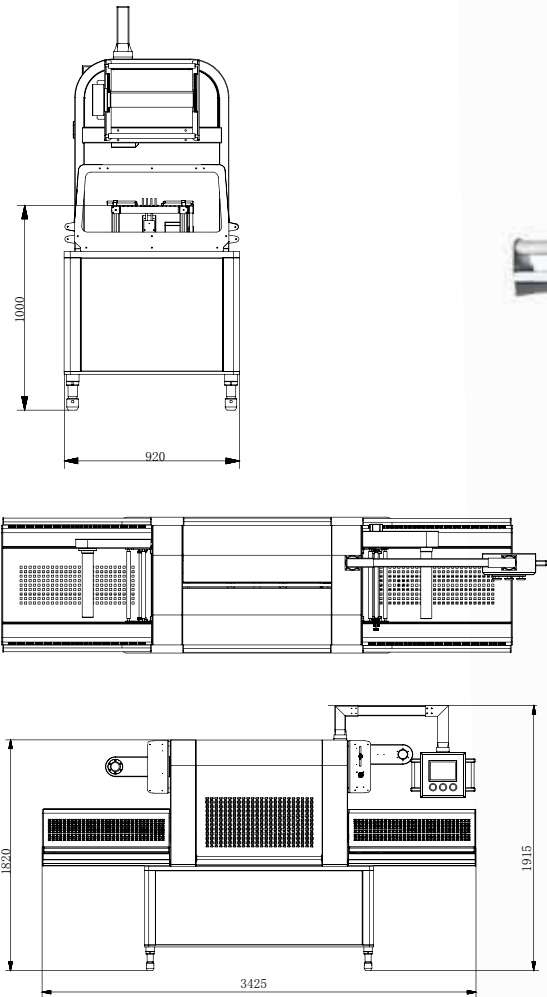

QT-700S Map Tray Sealer 气调封盒机

|                          |                                                 |
|--------------------------|-------------------------------------------------|
| 型号 Model                 | QT-700S                                         |
| 电源 Voltage(V/Hz)         | 3Phase 220/380 50-60                            |
| 功率 Power(kw)             | 5                                               |
| 包装形式 Result              | 封口 / 真空封口 / 充气封口<br>Seal/Vacuum Seal/Gas Insert |
| 包装频次 Capacity(times/min) | 1-6                                             |
| 包装尺寸 Tray Size(mm)       | 200×140×50                                      |
| 抽气速率 Pump Capacity(m³/h) | 100                                             |
| 外形尺寸 Dimension(mm)       | 3425×920×1915                                   |
| 重量 Weight(kg)            | ≈ 750                                           |



Main structure is made of 304 stainless steel  
PLC,touch screen and servo motor are from German Siemens  
High-precision photoelectric sensing system is from Japan Omron  
Vacuum pump is from original German Busch  
Adopt combined molds,easy to change,and mold has cooling system  
Coding machine is optional  
Insert gas after vacuum is optional  
Waste material collecting system  
Open type chain is from germany,suitable for both soft and hard film thermoforming



DDLZ-420A/520A Thermoforming Vacuum Packer 拉伸膜包装机

| 型号 Model                  | DDLZ-420A      | DDLZ-520A      |
|---------------------------|----------------|----------------|
| 电源 Voltage(V/Hz)          | 220/380 50-60  |                |
| 功率 Pump power(kw)         | 200            |                |
| 真空度 Vacuum degree(Pa)     | ≤ 200          |                |
| 压缩空气 Compress air(Mpa)    | ≥ 0.6          |                |
| 冷却水 Cooling water(Mpa)    | ≥ 0.15         |                |
| 上膜宽度 Upper film width(mm) | 397            | 497            |
| 下膜宽度 Down film width(mm)  | 422            | 522            |
| 外形尺寸 Dimension(mm)        | 6850×1200×1900 | 7300×1400×1900 |
| 重量 Weight(kg)             | 1700           | 2100           |



# PROCESSING AND PACKAGING

## EFFICIENCY & DURABILITY FOR OPTIMAL LIFE-WORK INTEGRATION

As a leading Chinese manufacturer specializing in advanced food packaging systems, we deliver solutions across heat sealing, shrink wrapping, and date coding technologies. Our product offers a comprehensive selection of equipment, engineered to meet diverse operational requirements.

A sealing machine is a device used to seal packaging containers, widely applied in industries such as food, pharmaceuticals, chemicals, and daily necessities. It seals packaging materials (such as plastic films, aluminum foil, composite materials, etc.) through heating, pressure, or other technologies, ensuring the integrity, leak-proofness, and freshness of the packaging. Sealing machines play a crucial role in modern production, enhancing efficiency, extending product shelf life, and improving packaging aesthetics.

Our sealing machines include manual press sealers, continuous sealers, foot pedal sealers, and handheld clamp sealers. For manual press sealers, we offer models with sealing lengths ranging from 100mm to 1000mm. Continuous sealers come with options such as horizontal/vertical dual-use, floor-standing frames, and ink wheel printing. Foot pedal sealers are available with sealing lengths from 350mm to 600mm, operated via a foot pedal switch, making them suitable for heavy products or tasks requiring both hands to hold the items. Handheld clamp sealers are available with sealing lengths from 200mm to 400mm, ideal for thicker packaging bags like aluminum foil bags.

For shrinking machines, we offer tunnel shrink machines and 2-in-1 sealing-cutting-shrinking machines. The 2-in-1 sealing-cutting-shrinking machine is a high-efficiency packaging device that integrates sealing, cutting, and shrinking functions, widely used in industries such as food, beverages, daily necessities, pharmaceuticals, and cosmetics. It wraps products in film, seals and cuts them, and then uses heat shrinking to tightly fit the film onto the product surface, creating a visually appealing, moisture-proof, and dust-proof packaging effect.

Liquid filling machines are automated devices used to accurately fill liquid products into containers, widely applied in industries such as food, beverages, pharmaceuticals, cosmetics, and chemicals. They efficiently and precisely measure, fill, and seal liquids, suitable for products like water, oil, wine, beverages, pharmaceuticals, and cosmetics. Our DFJ-130 filling machine is suitable for filling and sealing various liquids (such as low-viscosity, high-viscosity, and particle-containing liquids). With its compact size, it is ideal for shops and small-scale processing plants.

Marinating machines and brine injectors are specialized equipment in the food processing industry used for marinating meat, fish, vegetables, and other products. They quickly infuse flavors by soaking ingredients in seasoning solutions or injecting brine, enhancing taste and extending shelf life. They are suitable for meat processing, aquatic product processing, and poultry processing.

Ink wheel coding machines are devices used to print information such as production dates, batch numbers, expiration dates, barcodes, and QR codes on product packaging or labels. They are widely used in industries such as food, beverages, pharmaceuticals, cosmetics, and chemicals, playing a vital role in ensuring product traceability and regulatory compliance. Additionally, they can be equipped on foot pedal sealers to perform ink wheel printing while sealing.

**BI-8L** Brine Injector Machine 半自动盐水注射器

| 型号 Model                            | BI-8L         |
|-------------------------------------|---------------|
| 电压 Voltage(v/Hz)                    | 110/220 50/60 |
| 功率 Power(kw)                        | 1.1           |
| 压力 pressure(Mpa)                    | 0.4           |
| 生产能力 Production capacity(times/min) | 30-35         |
| 工作范围 Working Table(mm)              | 560X360       |
| 水槽容量 Tank capacity(L)               | 30            |
| 尺寸 Overall(mm)                      | 610X450X1030  |
| 重量 Weight(kg)                       | 51            |



TD-E twist tie machine is an ideal and economical machine for bread shop ,gift store to pack plastic bags. It saves much labour and time for your production. Current model is the second generation.e use aluminium and steel parts to replace plastic ones,the machine is more stable and durable. Colorful tie is optionl,each roll is 1000 meters long.

**TD-E pro** Tie Machine 金丝扎线机

| 型号 Model               | TD-E pro             |
|------------------------|----------------------|
| 电压 Voltage(V/Hz)       | 1Phase 110/220 50-60 |
| 功率 Power(kw)           | 0.6                  |
| 包装直径 Packing Diameter  | ≤ Φ13                |
| 可调节金丝长度 Tie Length(mm) | 50-100               |
| 外形尺寸 Dimension(mm)     | 530×180×290          |
| 重量 Weight(kg)          | 14                   |



**VT-25** Vacuum Tumblers 真空腌制机

| 型号 Model                        | VT-25       |
|---------------------------------|-------------|
| 电源 Voltage(V/Hz)                | 220 50-60   |
| 功率 Power(kw)                    | 0.15        |
| 腌制罐尺寸 Tumbler of size(mm)       | ø400x 400mm |
| 腌制罐材质 Tumbler of material       | SUS 304     |
| 腌制罐转速 Tumbler of speed(r/min)   | 30          |
| 载重 Capacity(kg)                 | 25          |
| 真空度 Vacuum pump of Capacity(pa) | 200         |
| 外形尺寸 Dimension(mm)              | 805×591×550 |
| 重量 Weight(kg)                   | 30          |



**DFJ-130S**



**DFJ-130P**

**DFJ-130/130S/130P** Filling Machine 酱包机

| 型号 Model                     | DFJ-130       | DFJ-130S      | DFJ-130P      |
|------------------------------|---------------|---------------|---------------|
| 电源 Voltage(V/Hz)             | 110/220 50-60 | 110/220 50-60 | 110/220 50-60 |
| 功率 Power(kw)                 | 0.9           | 0.9           | 0.9           |
| 薄膜最大直径 Film max diameter(mm) | 200           | 200           | 200           |
| 最大宽度 Max width(mm)           | 65            | 65            | 65            |
| 外形尺寸 Dimension(mm)           | 570×360×710   | 595×350×960   | 570×360×710   |
| 重量 Weight(kg)                | 35            | 43            | 38            |



**CVM-100 (VT-1)** Commercial Sous Vide Machine 低温烹调机

| 型号 Model                 | CVM-100 (VT-1) |
|--------------------------|----------------|
| 电源 Voltage(V/Hz)         | 220/380 50-60  |
| 功率 Power(kw)             | 9.37/14.37     |
| 篮容量 Capacity basket(kgs) | 60             |
| 温度 Temperature(°C )      | 0-99           |
| 材质 Material              | SUS304         |
| 载重 Maximum Loading(kgs)  | 150            |
| 箱体尺寸 Tank Size(mm)       | 585×448×415    |
| 外形尺寸 Dimension(mm)       | 1182×700×1150  |

MF-50 Manual Filler 手动灌装机

| 型号 Model                            | MF-50                        |
|-------------------------------------|------------------------------|
| 灌装容量 Filling Range(ml)              | 0.17-1.7 oz/5-50(adjustable) |
| 料斗容量 Capacity of Hopper             | 22lbs/10kg                   |
| 生产能力 Production capacity(times/min) | 30-35                        |
| 灌装精度 Filling Accuracy               | ±1%                          |
| 速度 Speed(times/min)                 | 20-30                        |



SPF High Viscosity Tabletop Paste Piston Filler  
高粘度台式膏体灌装机

| 型号 Model                 | SPF                                |
|--------------------------|------------------------------------|
| 工作频次 Capacity(pcs/min)   | 5-20                               |
| 灌装精度 Filling Accuracy    | ±1%                                |
| 材质 Material              | SUS304(touch part)                 |
| 料斗容量 Hopper of Volume(L) | 40                                 |
| 灌装容量 Filling volume(ml)  | 0-500,0-1000,0-2500,5000(optional) |



SLF Low Viscosity Tabletop Liquid Piston Filler  
低粘度台式灌装机

| 型号 Model                | SLF                                |
|-------------------------|------------------------------------|
| 工作频次 Capacity(pcs/min)  | 5-20                               |
| 灌装精度 Filling Accuracy   | ±1%                                |
| 材质 Material             | SUS304(touch part)                 |
| 灌装容量 Filling volume(ml) | 0-500,0-1000,0-2500,5000(optional) |



LF-250 Weighing Liquid filler machine 称重式液体灌装机

| 型号 Model               | LF-250        |
|------------------------|---------------|
| 电源 Voltage(V/Hz)       | 110/220 50-60 |
| 功率 Power(kw)           | 0.35          |
| 灌装容量 Filling volume(g) | ø400x 400mm   |
| 外形尺寸 Dimension(mm)     | 245×215×130   |
| 重量 Weight(kg)          | 4             |



**SPFT-35** High Viscosity Movable Paste Piston Filler  
With Caster SPFT-35(10mm) 高粘度可移动膏体灌装机

| 型号 Model                 | SPFT-35                            |
|--------------------------|------------------------------------|
| 工作频次 Capacity(pcs/min)   | 5-20                               |
| 灌装精度 Filling Accuracy    | ±1%                                |
| 空气压力 Air Pressure(Mpa)   | 0.4-0.6                            |
| 材质 Material              | SUS304(touch part)                 |
| 料斗容量 Hopper of Volume(L) | 40                                 |
| 灌装容量 Filling volume(ml)  | 0-500,0-1000,0-2500,5000(optional) |




**BIBF-30(SSBFP-30)** Semi-Automatic Bag-In-Box  
Filling Machine 半自动袋装灌装机

| 型号 Model                       | BIBF-30(SSBFP-30) |
|--------------------------------|-------------------|
| 电源 Voltage(V Hz)               | 110/220 50-60     |
| 功率 Power(Kw)                   | 0.37              |
| 灌装容量 Filling quantity range(g) | 0.1-30            |
| 灌装精度 Filling precision         | ±1%               |
| 灌装速度 Filling speed(times/min)  | 5-6               |

**SLF-2-E** Automatic Low Viscosity Filling Machine  
低粘度自动灌装机

| 型号 Model                | SLF-2-E                            |
|-------------------------|------------------------------------|
| 工作频次 Capacity(pcs/min)  | 5-20                               |
| 灌装精度 Filling Accuracy   | ±1%                                |
| 空气压力 Air Pressure(Mpa)  | 0.4-0.6                            |
| 材质 Material             | SUS304(touch part)                 |
| 灌装容量 Filling volume(ml) | 0-500,0-1000,0-2500,5000(optional) |

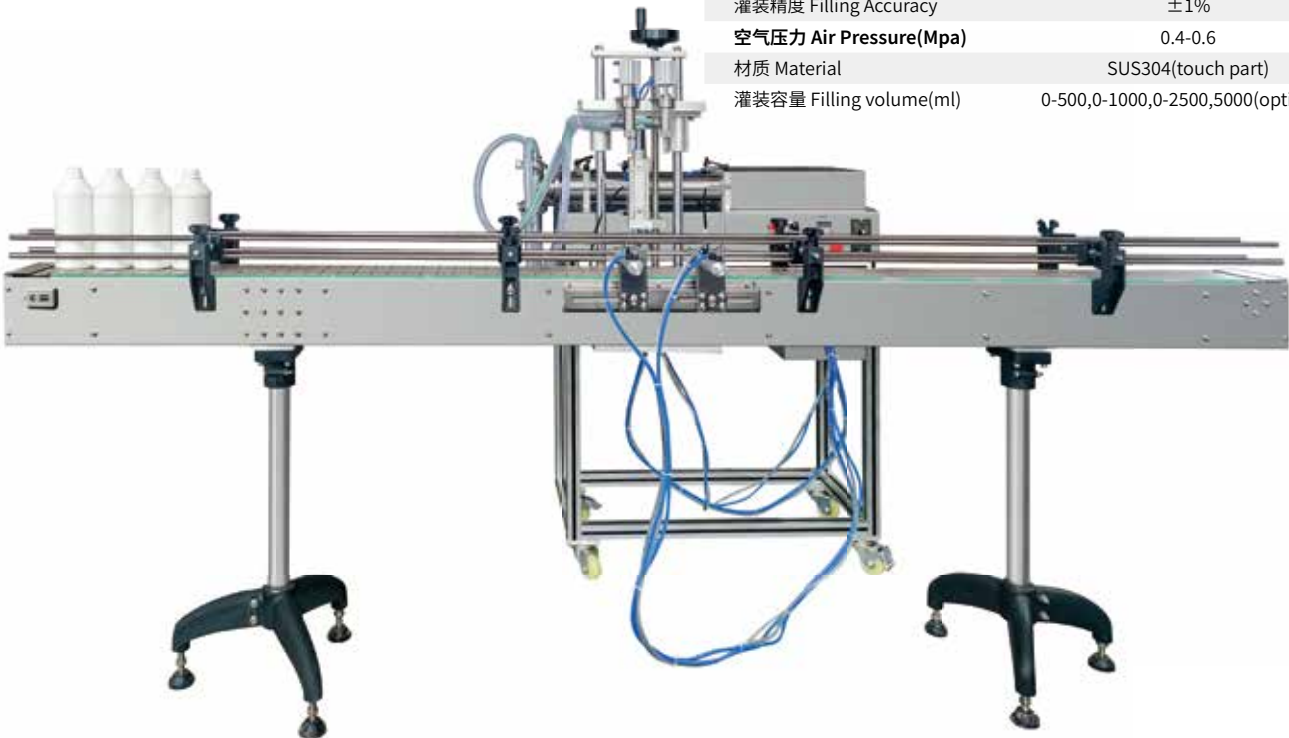

**BIBF-5000(MSBFP-30)** Semi-Automatic Bag-In-  
Box Filling Machine 半自动袋装灌装机

| 型号 Model                        | BIBF-5000(MSBFP-30) |
|---------------------------------|---------------------|
| 电源 Voltage(V Hz)                | 110/220 50-60       |
| 功率 Power(w)                     | 3                   |
| 灌装容量 Filling quantity range(ml) | 500-5000            |
| 灌装精度 Filling Accuracy           | ±1%                 |
| 灌装速度 Filling speed(times/min)   | 5-6                 |
| 空气压力 Air Pressure(Mpa)          | 0.4-0.6             |

Hand sealer is suitable for sealing films in PE PVC and PP materials.  
We have hand sealer with diferent body material like aluminium. iron and plastic, PFS C type machine has a side cutterit can cut down the film after sealing.

Technical Characters!

- 1.Blue and gray are regular color
- 2.Only use copper material transforer
- 3.OEM logo is available
- 4.Fuse and special plug are optionel



PFS-100~500 Hand sealer 手压封口机

| 型号 Model             | PFS-100       | PFS-200    | PFS-300    | PFS-400    | PFS-500    |
|----------------------|---------------|------------|------------|------------|------------|
| 电源 Voltage(V/Hz)     | 110/220 50-60 |            |            |            |            |
| 功率 Power(kw)         | 0.15          | 0.3        | 0.4        | 0.6        | 0.75       |
| 密封条 Sealing size(mm) | 100×2         | 200×2      | 300×2      | 400×2      | 500×2      |
| 外形尺寸 Dimension(mm)   | 72×233×136    | 75×319×144 | 84×442×155 | 84×547×160 | 85×640×165 |
| 重量 Weight(kg)        | 1.5           | 2.2        | 3.5        | 4.2        | 5.6        |



FRN-500~1000 Hand Sealer 加长型手压封口机

| 型号 Model             | FRN-500       | FRN-600     | FRN-700     | FRN-800      | FRN-900      | FRN-1000     |
|----------------------|---------------|-------------|-------------|--------------|--------------|--------------|
| 电源 Voltage(V/Hz)     | 110/220 50-60 |             |             |              |              |              |
| 功率 Power(kw)         | 0.7           | 0.78        | 0.91        | 1.05         | 1.2          | 1.4          |
| 密封条 Sealing size(mm) | 500×2         | 600×2       | 700×2       | 800×2        | 900×2        | 1000×2       |
| 外形尺寸 Dimension(mm)   | 705×150×250   | 805×150×250 | 905×150×250 | 1005×150×250 | 1105×150×250 | 1205×150×250 |
| 重量 Weight(kg)        | 5.5           | 6.0         | 6.5         | 7.0          | 7.5          | 8.0          |



PS-450/600 Auto Sealer 半自动脚踏封口机

| 型号 Model             | PS-450        | PS-600      |
|----------------------|---------------|-------------|
| 电源 Voltage(V/Hz)     | 110/220 50-60 |             |
| 功率 Impulse power(kw) | 0.6           | 0.8         |
| 密封条 Sealing size(mm) | 450×10        | 600×10      |
| 外形尺寸 Dimension(mm)   | 530×500×200   | 680×500×200 |
| 重量 Weight(kg)        | 25            | 30          |

Portable sealer is suitable for sealing films in PE, PVC and PP materials.  
FKR sealer is a direct heat portable sealer,FKR A type is a impulse heat portable sealer



FKR-200/300/400/200A/300A/400A Portable Sealer 手钳封口机

| 型号 Model                   | FKR-200       | FKR-300     | FKR-400     | FKR-200A    | FKR-300A    | FKR-400A    |
|----------------------------|---------------|-------------|-------------|-------------|-------------|-------------|
| 电源 Voltage(V/Hz)           | 110/220 50-60 |             |             |             |             |             |
| 功率 Power(kw)               | 0.3           | 0.4         | 0.5         | 0.45        | 0.65        | 0.75        |
| 最大密封条 Max Sealing size(mm) | 200×12        | 300×12      | 400×12      | 200×5       | 300×5       | 400×5       |
| 温度 Temperature(℃)          | 0-250         | 0-250       | 0-250       | 0-250       | 0-250       | 0-250       |
| 包装尺寸 Dimension(mm)         | 435×155×300   | 435×155×300 | 435×155×300 | 600×365×215 | 600×365×215 | 600×365×215 |
| 重量 Weight(kg)              | 1.7           | 1.85        | 2           | 7           | 8.6         | 8.65        |

Step sealer is suitable for sealing films in PE, PVC and PP materials.  
PFS sealer is a foot operated impulse heat sealer,PFS-DD sealer is a foot operated direct heat sealer.



PFS-350/450/600 Step Sealer 瞬热式脚踏封口机

| 型号 Model                       | PFS-350       | PFS-450     | PFS-600     |
|--------------------------------|---------------|-------------|-------------|
| 电源 Voltage(V/Hz)               | 110/220 50-60 |             |             |
| 功率 Impulse power(kw)           | 0.85          | 1.05        | 1.5         |
| 密封条 Sealing size(mm)           | 350×10        | 450×10      | 600×10      |
| 密封厚度 Max.Sealing Thickness(mm) | 0.05-0.9      | 0.05-0.9    | 0.05-0.9    |
| 包装尺寸 Dimension(mm)             | 800×540×250   | 800×540×250 | 800×540×250 |
| 重量 Weight(kg)                  | 19            | 21          | 25          |




Technical Characters!

- 1. Blue is regular color
- 2. Only use copper material transformer
- 3. Regular sealing width is 10mm. 2mm/5mm/8mm is available

PFS-DD200/300/400 Step Sealer 直热式脚踏封口机

| 型号 Model                       | PFS-DD200     | PFS-DD300   | PFS-DD400   |
|--------------------------------|---------------|-------------|-------------|
| 电源 Voltage(V/Hz)               | 110/220 50-60 |             |             |
| 功率 Impulse power(kw)           | 0.25          | 0.35        | 0.5         |
| 密封条 Sealing size(mm)           | 200×15        | 300×15      | 400×15      |
| 密封厚度 Max.Sealing Thickness(mm) | 0.1-1.2       | 0.1-1.2     | 0.1-1.2     |
| 包装尺寸 Dimension(mm)             | 800×540×260   | 800×540×260 | 800×540×260 |
| 重量 Weight(kg)                  | 15            | 17          | 18          |

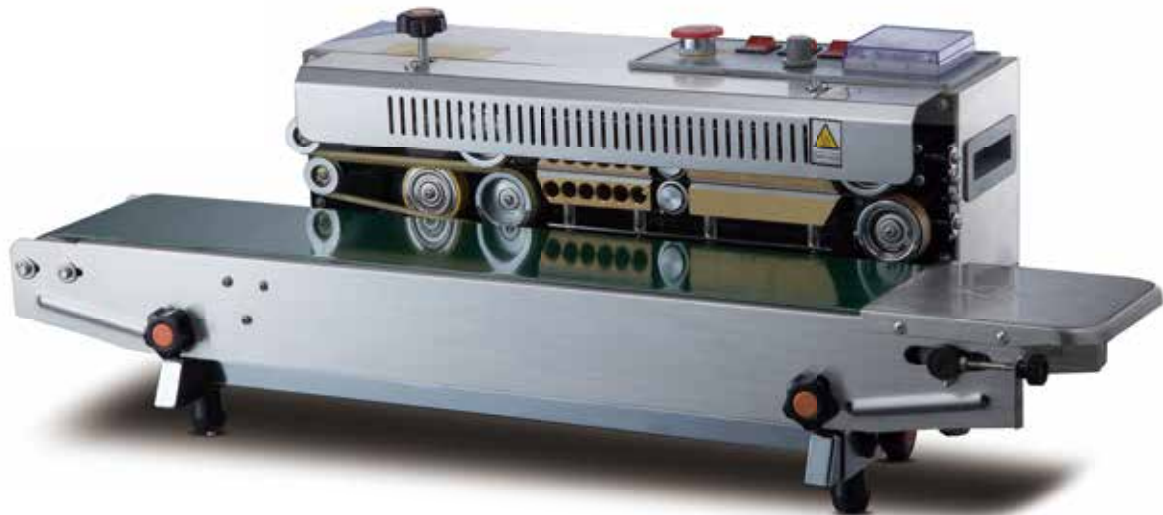

DBF-770W/770WL Band Sealer 连续封口机

| 型号 Model                    | DBF-770W      | DBF-770WL     |
|-----------------------------|---------------|---------------|
| 电源 Voltage(V/Hz)            | 110/220 50-60 | 110/220 50-60 |
| 功率 Power consumption(kw)    | 0.75          | 0.5           |
| 密封速度 Sealing speed(m/min)   | 0-12          | 0-12          |
| 密封宽度 Sealing width(mm)      | 6-15          | 6-15          |
| 温度范围 Temperature range(°C ) | 0-300         | 0-300         |
| 最大载重 Conveyor loading(kg)   | 5             | 5             |
| 外形尺寸 Dimension(mm)          | 860×400×440   | 875×410×395   |
| 重量 Weight(kg)               | 25            | 30            |



DBF-810W Band Sealer 连续封口机

| 型号 Model            | DBF-810W    |
|---------------------|-------------|
| 电源 Voltage(V/Hz)    | 110 60      |
| 功率 Power(kw)        | ≈ 0.7       |
| 载重 Loading(Kg)      | 3           |
| 外形尺寸 Dimensions(mm) | 950×390×345 |
| 净重 Weight(kg)       | 28          |



DGYF-500A/B/C/D Electromagnetic induction sealing machine 电磁感应封口机

| 型号 Model                         | DGYF-500A | DGYF-500B                                              | DGYF-500C | DGYF-500D |
|----------------------------------|-----------|--------------------------------------------------------|-----------|-----------|
| 电源 Voltage(V/Hz)                 |           | 110/220 50-60                                          |           |           |
| 输出功率 Output power(kw)            |           | 0.5                                                    |           |           |
| 工作频率 Work frequency(kHz)         |           | 50                                                     |           |           |
| 密封直径 Sealing diameter(mm)        | Φ20~100   | Φ10~35                                                 | Φ50~130   | Φ20~65    |
| 适用薄膜材料 Applicable film materials |           | Special inductive film and aluminum foil compound film |           |           |
| 外观尺寸 Dimension(mm)               |           | 340X290X150                                            |           |           |
| 净重 Weight(kg)                    |           | 5                                                      |           |           |



LGYF-1500AX-II Electromagnetic induction sealing machine 电磁感应封口机

| 型号 Model           | LGYF-1500AX-II                  | 封口直径 Sealing diameter(mm)     | Φ20-50               |
|--------------------|---------------------------------|-------------------------------|----------------------|
| 电源 Voltage(V/Hz)   | 220 50/60                       | 最佳直径 Optimum diameter(mm)     | Φ30-45               |
| 封口速度 Sealing speed | 3-10 m/min, 70-120 bottles/min  | 瓶高 Bottle height(mm)          | 20-200               |
| 形式 Format          | Transistor wind continuous type | 工作频率 Operating frequency(KHz) | 75-85                |
| 控制方式 Control mode  | Speed control of conveyor belt  | 输入电流 Input current(A)         | <10                  |
| 机箱材质 Case material | 304 stainless steel housing     | 输出电流 Output current(A)        | static <2 dynamic <7 |
| 外观尺寸 Dimension(mm) | 1150×480×400                    | 外壳防护等级 Shell protection class | IP21                 |
| 净重 Weight(kg)      | 38                              | 输出功率 Output power(W)          | 1500                 |

FM series of 2 in 1 shrink sealer has advantage of fast heating,compact size and shrinking sealing 2 in 1. it is very suitable for PVC POF film shrink and sealing,widely used in food,printing,supermarket and stationary industry.



FM-3028/4535/5540/5540A Shrink Machine 二合一收缩机

| 型号 Model                    | FM-3028       | FM-4535       | FM-5540       | FM-5540A      |
|-----------------------------|---------------|---------------|---------------|---------------|
| 电源 Voltage(V/Hz)            | 110/220 50-60 |               | 110/220 50-60 |               |
| 功率 Power(kw)                | 3             | 4             | 3.5           | 3.5           |
| 最大包装尺寸 Max packing size(mm) | 340×250×100   | 430×250×200   | 550×400×200   | 550×400×200   |
| 收缩时间 Shink time(P/min)      | 1-4           | 1-4           | 1-4           | 1-8           |
| 包装尺寸 Dimension(mm)          | 955×600×1020  | 1245×550×1050 | 1365×690×1100 | 1530×690×1100 |
| 重量 Weight(kg)               | 100           | 120           | 130           | 140           |

BS series shrink tunnel adopt infrared ray to heat and shrink PVC materials,it is very suitable for industry of food,drinks,cosmetic,toy,stationary,book,hardware and so on. We have many different sizes of machine for client to choose and we also receive OEM order,we can design the machine according to your request.



BS-200/250/300LD/400LD/450/550/650 Shrink Machine 热收缩机

| 型号 Model                    | BS-200        | BS-250      | BS-300LD      | BS-400LD      | BS-450               | BS-550        | BS-650        |
|-----------------------------|---------------|-------------|---------------|---------------|----------------------|---------------|---------------|
| 电源 Voltage(V/Hz)            | 110/220 50-60 |             | 110/220 50-60 |               | 3Phase 220/380 50-60 |               |               |
| 功率 Power(kw)                | 2.5           | 3           | 4.5           | 6.5           | 7.5                  | 15            | 20            |
| 最大包装尺寸 Max packing size(mm) | 200×120       | 250×150     | 300×150       | 400×200       | 450×250              | 550×350       | 650×500       |
| 收缩时间 Shink time(P/min)      | 0.6           | 0.6         | 0-10          | 0-10          | 0-10                 | 0-10          | 0-10          |
| 包装尺寸 Dimension(mm)          | 800×450×545   | 820×520×650 | 1100×530×1250 | 1200×630×1300 | 1320×650×1340        | 1920×900×1420 | 1930×950×1580 |
| 重量 Weight(kg)               | 30            | 40          | 75            | 85            | 100                  | 160           | 220           |



BS-4525A/4535A Shrink Machine 热收缩机

| 型号 Model                    | BS-4525A                      | BS-4535A      |
|-----------------------------|-------------------------------|---------------|
| 电源 Voltage(V/Hz)            | 110/220/ 3Phase 220/380 50-60 |               |
| 功率 Power(kw)                | 6.5                           | 6.5           |
| 最大包装尺寸 Max packing size(mm) | 450×250                       | 450×350       |
| 速度 Speed(m/min)             | 0-10                          | 0-10          |
| 包装尺寸 Dimension(mm)          | 1200×682×965                  | 1200×682×1065 |
| 重量 Weight(kg)               | 95                            | 105           |

Hp-130 is a manual type ribbon coding machine,very simple and easy to operate.  
Hp-241 is a automatic type ribbon coding machine.  
These 2 models are very economical, very suitable for small factories or stores to use.Ribbon has different color to choose and easy to replace.Pls notethe coding part need at least 15mins to pre-heat,otherwise the temperature is too low so the ribbon can not be print on the products.

HP-130 Ribbon Coding Machine 打码机

| 型号 Model                     |                 | HP-130        |
|------------------------------|-----------------|---------------|
| 电源 Voltage(V/Hz)             |                 | 110/220 50-60 |
| 功率 Power(kw)                 |                 | 0.04          |
| 打印速度 Printing speed(pcs/min) |                 | 0-100         |
| 印刷数量 Printing Quantity       | 1 行 One line    | Max.12Types   |
|                              | 2 行 Two lines   | Max.24Types   |
|                              | 3 行 Three lines | Max.36Types   |
| 色带宽度 Color Ribbon Width(mm)  |                 | 25 30 35      |
| 外形尺寸 Dimension(mm)           |                 | 270×160×220   |
| 重量 Weight(kg)                |                 | 2             |



HP-241 Ribbon Coding Machine 打码机

| 型号 Model                     |                 | HP-241        |
|------------------------------|-----------------|---------------|
| 电源 Voltage(V/Hz)             |                 | 110/220 50-60 |
| 功率 Power(kw)                 |                 | 0.22          |
| 打印速度 Printing speed(pcs/min) |                 | 0-100         |
| 印刷数量 Printing Quantity       | 1 行 One line    | Max.12Types   |
|                              | 2 行 Two lines   | Max.24Types   |
|                              | 3 行 Three lines | Max.36Types   |
| 色带宽度 Color Ribbon Width(mm)  |                 | 25 30 35      |
| 外形尺寸 Dimension(mm)           |                 | 350×350×350   |
| 重量 Weight(kg)                |                 | 10            |



My-380 adopt photoelectric mechanism technology. featuring automatic temperature control, auto counting and adjustable print position.Adopt solid-ink coding with selectable color, featuring legible printing. instant printing-instant drying and strong adhesion.

MY-380 Ink Wheel Coding Machine 打码机

| 型号 Model                     | MY-380                        |
|------------------------------|-------------------------------|
| 电源 Voltage(V/Hz)             | 110/220 50-60                 |
| 功率 Power(kw)                 | 0.18                          |
| 墨辊尺寸 Ink roller size(mm)     | 35×32                         |
| 打印速度 Printing speed(pcs/min) | 300                           |
| 对象大小 Object size(mm)         | L:55-500 W:30-300             |
| 字母数字 Letters number(mm)      | 5lines 10letters per line max |
| 机器重量 Machine Weight(kg)      | 23                            |
| 机器尺寸 Machine size(mm)        | 440×340×260                   |



HP-450 Ribbon Coding Machine 打码机

| 型号 Model                                             | HP-450                          |
|------------------------------------------------------|---------------------------------|
| 电源 Voltage(V/Hz)                                     | 110/220 50-60                   |
| 功率 Power(kw)                                         | 0.22                            |
| 最大打印速度 Max.Printing speed(pcs/min)                   | 200                             |
| 最大打印行 Max.Printing line                              | 10.5PT:3Lines(Max.12Types/Line) |
| 色带或墨辊的尺寸 Size of Character(height)                   | 3.0                             |
| Size of Color Ribbon or Solld-Ink Roller(mm)         | 25 30 35                        |
| 最大水平调整打印尺寸 Max.Horizontal adjusting Size for Printer | 150                             |
| 重量 Weight for Printer(Without Stand)                 | 7                               |
| 模宽范围 Max.Fillm Width(mm)                             | 200-800                         |

