


20 Years Of Industry Experience


65 Best-Selling Countries

40 Global Users Per Year

5.0 Thousand Square Meters Production Area

 National High-Tech Enterprise

CE Export Certification

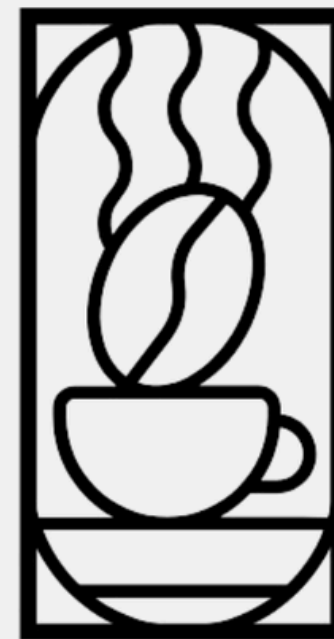

LA
TRIESTINA




COTTURA
group



iF DESIGN AWARD 2024 WINNER
G3030A COFFEE MACHINE





Professional Techniques
Mastering coffee with expertise

Industrial Design
Elevating experience with design

Life Aesthetics
Enhancing life with creativity




Professional Techniques



58mm Commercial Brewing System

For many years, La Triestina has been dedicated to bringing commercial standards and technologies into the home. The 58mm commercial filter basket, metal group head, and high-density shower screen used in its commercial brewing system have become the iconic features of La Triestina's product design.



Thermal Balance Group Head

Additional PTC heating elements on the group head help reduce temperature loss as water flows from the pipes to the group head, minimizing extraction temperature variations and ensuring stable coffee extraction.



Complex Group Head

The group head and brew boiler are integrated into an upper and lower structure that the water can seamlessly pass, reducing the temperature loss during extraction. The heat exchange design of water circulation ensures both stability and precision in temperature control.



Complex Heat Exchanger Boiler System with Complex Group Head

The patented flagship boiler system, which ingeniously integrates brew boiler and steam boiler through a specific flow path for multi-level segmented heat exchange, ensures both the durability needed for high-demand commercial use and the freshness of water quality during extraction.



Complex Multi-Boiler System with Saturated E61 Group Head

A 300mL PID-controlled water storage boiler is horizontally connected to the rear of the classic E61 group head, forming a zero-distance structure between the boiler and the group head. This design ensures precise and adjustable temperature control, with extraction temperature exactly as displayed.

This technology retains four key features of the E61 group head: heat exchange, siphon insulation, mechanical pre-infusion, and high thermal conductivity of pure copper. Additionally, it achieves independent temperature control for the group head. The saturated E61 group head, brew boiler, and heat exchanger steam boiler are interconnected in series, enabling staged heating. This results in a balanced system with high performance, high efficiency, and excellent durability, ensuring more stable coffee output.

G3207A



● Titanium Grey

Professional Configuration

- 550mL Brew Boiler*2
- 10.5L Heat Exchanger Steam Boiler
- Complex Group Head*2
- 58mm Commercial Brewing System
- Rotary Pump
- Dual PID Temperature Control
- LCD Screen*2
- Smart WIFI / Bluetooth Dual-mode Connection

Core Function

- . Complex heat exchanger boiler system, with a patented flagship boiler system
- . Dual variable pressure vane pump & dual inverter DC motor, intelligent digital control of variable pressure
- . Multiple stages of variable pressure settings select from dual variable pressure modes (time / weight)
- . Various adjustable parameters: pre-infusion settings / extraction temperature / steam pressure / steam temperature / preset the power status
- . Dual LCD screen, real-time display, easy comparison at a glance
- . Smart WiFi / Bluetooth dual-mode connection, creating a full-link coffee network platform

Product Parameters

- Rated Power
5200W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
118kg/165kg
- Unit/CTN
975x538x668mm/1070x780x761mm
- Loading Capacity
41PCS/89PCS/90PCS





G3226C



Professional Configuration

- 300mL Brew Boiler*2
- 10.5L Heat Exchanger Steam Boiler
- Saturated E61 Group Head*2
- 58mm Commercial Brewing System
- Rotary Pump
- Dual PID Temperature Control
- Touch Screen Display*2
- Coffee Pressure Gauge*2
Steam Pressure Gauge
Pump & External
Water Pressure Gauge

Core Function

- . Complex multi-boiler system, with a patented flagship boiler system
- . Dual saturated E61 group head with precise temperature control, ensures accurate extraction temperature
- . Variable pressure controlled by flow adjustment rod, allowing manual adjustment of pre-infusion / extraction pressure
- . Convenient preset parameters like extraction temperature / flow / pre-infusion time, etc.
- . Dual steam modes (manual / automatic) for flexible switching
- . Streamlined design with illuminated back panel

Product Parameters









- Rated Power
4700W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
62.5kg/76.7kg
- Unit/CTN
768x487x582mm/860x728x745mm
- Loading Capacity
56PCS/124PCS/126PCS

G3126C



Ivory White

Professional Configuration

-  300mL Brew Boiler
-  5.25L Heat Exchanger Steam Boiler
-  Saturated E61 Group Head
-  58mm Commercial Brewing System
-  Rotary Pump
-  PID Temperature Control
-  Touch Screen Display
-  Coffee Pressure Gauge
Steam Pressure Gauge
Pump & External Water Pressure Gauge

Core Function

- . Complex dual boiler system, allowing simultaneous coffee extraction and milk frothing
- . Saturated E61 group head with precise temperature control, ensures accurate extraction temperature
- . Variable pressure controlled by flow adjustment rod, allowing manual adjustment of pre-infusion / extraction pressure
- . Convenient preset parameters like extraction temperature / flow / pre-infusion time, etc.
- . Dual steam modes (manual / automatic) for flexible switching
- . Streamlined design with illuminated back panel

Product Parameters

- Rated Power
2900W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
45.1kg/57.3kg
- Unit/CTN
520x487x580mm/708x605x745mm
- Loading Capacity
80PCS/170PCS/171PCS





G3211A



Professional Configuration

- 550mL Brew Boiler*2
- 5.5L Steam Boiler
- Complex Group Head*2
- 58mm Commercial Brewing System
- Rotary Pump
- PID Dual PID Temperature Control
- Touch Screen Display*2
- Coffee Pressure Gauge Steam Pressure Gauge

Core Function

- . Multi-boiler system, dual brew boiler with independent temperature control
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . New flow meter for programmable extraction doses, ensuring consistent quality for cafés
- . Convenient preset parameters like extraction temperature / pre-infusion time / hot water time, etc.
- . Adjustable extraction time, with switchable electronic / manual control modes
- . Steam handle switch for effortless operation
- . Minimalist design with LED side panel light and illuminated logo

Product Parameters

- Rated Power
4200W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
54.7kg/67.3kg
- Unit/CTN
678x550x528mm/838x682x641mm
- Loading Capacity
66PCS/135PCS/135PCS

G3111A



Cotton Cloud White

Professional Configuration

- 550mL Brew Boiler
- 5.5L Steam Boiler
- Complex Group Head
- 58mm Commercial Brewing System
- Rotary Pump
- PID Temperature Control
- Touch Screen Display
- Coffee Pressure Gauge
Steam Pressure Gauge

Core Function

- . Dual boiler system, independent heating for extraction and steam
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . New flow meter for programmable extraction doses, ensuring consistent quality for cafés
- . Convenient preset parameters like extraction temperature / extraction flow / pre-infusion time / hot water time, etc.
- . Adjustable extraction time, with switchable electronic / manual control modes
- . Steam handle switch for effortless operation
- . Minimalist design with LED side panel light and illuminated logo

Product Parameters

- Rated Power
3200W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
43.6kg/51.8kg
- Unit/CTN
473x550x528mm/682x650x641mm
- Loading Capacity
81PCS/162PCS/162PCS





G3201



● Ink Black

Professional Configuration

- 550mL Brew Boiler*2
- 10.5L Heat Exchanger Steam Boiler
- Complex Group Head*2
- 58mm Commercial Brewing System
- Rotary Pump
- PID Dual PID Temperature Control
- Display Screen*2
- Coffee Pressure Gauge Steam Pressure Gauge

Core Function

- .Complex heat exchanger boiler system with complex group head, precise temperature control and exceptional continuous coffee production
- .Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- .Convenient preset parameters like extraction temperature / extraction flow / hot water time, etc.
- .Multi functional control panel buttons for better tactile sensation, with programmable parameters to create the perfect coffee shop SOP
- .Universal rotary steam wand with dry steam supports different types of frothing techniques and encourages all kinds of latte art
- .Dual pressure gauge for easy reading of steam and extraction pressure

Product Parameters

- Rated Power 4200W
- Rated Voltage/Frequency 220V~ 50Hz
- N.W/G.W 52.5kg/63.6kg
- Unit/CTN 850x565x525mm/940x645x690mm
- Loading Capacity 63PCS/126PCS/126PCS

G3120C



● Ink Black

Professional Configuration

- 

550mL Brew Boiler*2
- 

5.25L Steam Boiler
- 

Complex Group Head*2
- 

58mm Commercial Brewing System
- 

Rotary Pump
- 

Dual PID Temperature Control
- 

Display Screen*2
- 

Coffee Pressure Gauge*2
Steam Pressure Gauge

Core Function

- . Multi-boiler system, dual brew boiler with independent temperature control
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . Convenient preset parameters like extraction temperature / extraction time / hot water time, etc.
- . Multifunctional control panel buttons for better tactile sensation
- . Coffee and steam pressure gauges for easy reading of extraction and steam pressure
- . Universal rotary steam wand with dry steam supports different types of frothing techniques and encourages all kinds of latte art

Product Parameters

- Rated Power
4200W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
44.7kg/55.7kg
- Unit/CTN
816x504x500mm/895x560x605mm
- Loading Capacity
72PCS/156PCS/156PCS



*This image shows G3143



G3243A



Professional Configuration

- 550mL Brew Boiler*2
- 5.5L Steam Boiler
- Complex Group Head*2
- 58mm Commercial Brewing System
- Rotary Pump
- PID PID Temperature Control
- Touch Screen Display*2
- Coffee Pressure Gauge Steam Pressure Gauge

Core Function

- . Multi-boiler system, dual brew boiler with independent temperature control
- . Equipped with complex group head , water seamlessly pass, reducing the temperature loss during extraction
- . Convenient preset parameters like extraction temperature / pre-infusion time / hot water time, etc.
- . Steam handle switch for effortless operation
- . Universal rotary steam wand with dry steam supports different types of frothing techniques and encourages all kinds of latte art
- . Dual pressure gauge for easy reading of steam and extraction pressure

Product Parameters

- Rated Power 4200W
- Rated Voltage/Frequency 220V~ 50Hz
- N.W/G.W 46.7kg/57.3kg
- Unit/CTN 78PCS/162PCS/162PCS
- Loading Capacity 78PCS/162PCS/162PCS

Multi-use Espresso Machine











G3124X



● Titanium Grey

Professional Configuration

-  300mL Brew Boiler
-  2L Heat Exchanger Steam Boiler
-  Saturated E61 Group Head
-  58mm Commercial Brewing System
-  Rotary Pump
-  Dual PID Temperature Control
-  Touch Screen Display
-  Coffee Pressure Gauge
Steam Pressure Gauge

Core Function

- . Complex dual boiler system with independent temperature control allows simultaneous coffee extraction and milk frothing
- . Saturated E61 group head with precise temperature control, ensures accurate extraction temperature
- . Variable pressure adjusted by handle, explore diversified flavors with different formulas
- . Convenient preset parameters like extraction temperature / steam temperature / pre-infusion time, etc.
- . Premium walnut wood decorative accessories, presenting exquisite stainless steel vacuum plating technique
- . Removable water tank (2.5L) & automatic water supply and drainage system

Product Parameters

- Rated Power
2900W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
28.5kg/36.2kg
- Unit/CTN
316x420x522mm/625x415x589mm
- Loading Capacity
179PCS/379PCS/380PCS





G3124F



Professional Configuration

- 2L Heat Exchanger Boiler
- Rotary Pump
- E61 Group Head
- 58mm Commercial Brewing System
- PID Temperature Control
- Coffee Pressure Gauge
- Touch Screen Display
- Stainless Steel Body

Core Function

- . Heat exchanger boiler system, allow simultaneous coffee extraction and milk frothing
- . E61 group head maintains consistent heat, offering more stable extraction
- . Convenient preset parameters like boiler temperature / pre-infusion time, etc.
- . Switch between 3/4-hole steam nozzles that can manage both home and business scenarios with ease
- . Wood handle switch for effortless operation
- . Removable water tank (2.5L) & automatic water supply and drainage system

Product Parameters

- Rated Power
2200W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
26.7kg/34kg
- Unit/CTN
297x428x517mm/616x386x562mm
- Loading Capacity
214PCS/434PCS/436PCS

G3148A /G3148B



Professional Configuration

- 550mL Brew Boiler
- 1L Steam Boiler
- Complex Group Head
- 58mm Commercial Brewing System
- G3148A: Vibration Pump
G3148B: Rotary Pump
- Dual PID Temperature Control
- Touch Screen Display
- Coffee Pressure Gauge
Steam Pressure Gauge

Core Function

- . Dual boiler with independent temperature control, allowing simultaneous coffee extraction and milk frothing
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . Rotary pump or vibration pump, ensuring reliable durability
- . Automatic preset milk frothing temperature; NTC temperature sensor, expert in making latte
- . Convenient preset parameters like extraction temperature / time / pre-infusion time, etc.
- . Removable water tank (2.5L) & automatic water supply and drainage system

Product Parameters

- Rated Power
G3148A (2350W) G3148B (2500W)
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
G3148A:18.8kg/25.2kg
G3148B:23.3kg/29.8kg
- Unit/CTN
351x476x392mm/490x485x630mm
- Loading Capacity
144PCS/288PCS/384PCS





G3148C



Professional Configuration

-  550mL Brew Boiler
-  1L Steam Boiler
-  Complex Group Head
-  58mm Commercial Brewing System
-  Rotary Pump
-  Dual PID Temperature Control
-  Touch Screen Display
-  Coffee Pressure Gauge
Steam Pressure Gauge


Core Function

- . Dual boiler with independent temperature control, allowing simultaneous coffee extraction and milk frothing
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . 1L steam boiler and adjustable steam temperature for effortless continuous frothing
- . Automatic preset milk frothing temperature; NTC temperature sensor, expert in making latte
- . Convenient preset parameters like extraction temperature / time / pre-infusion time, etc.
- . Removable water tank (2.5L) & automatic water supply and drainage system

Product Parameters

- Rated Power
2500W
- Rated Voltage/Frequency
220V~ 50Hz
N.W/G.W
52.5kg/64kg
Unit/CTN
364x476x392mm/490x485x630mm
- Loading Capacity
144PCS/288PCS/384PCS

G3149

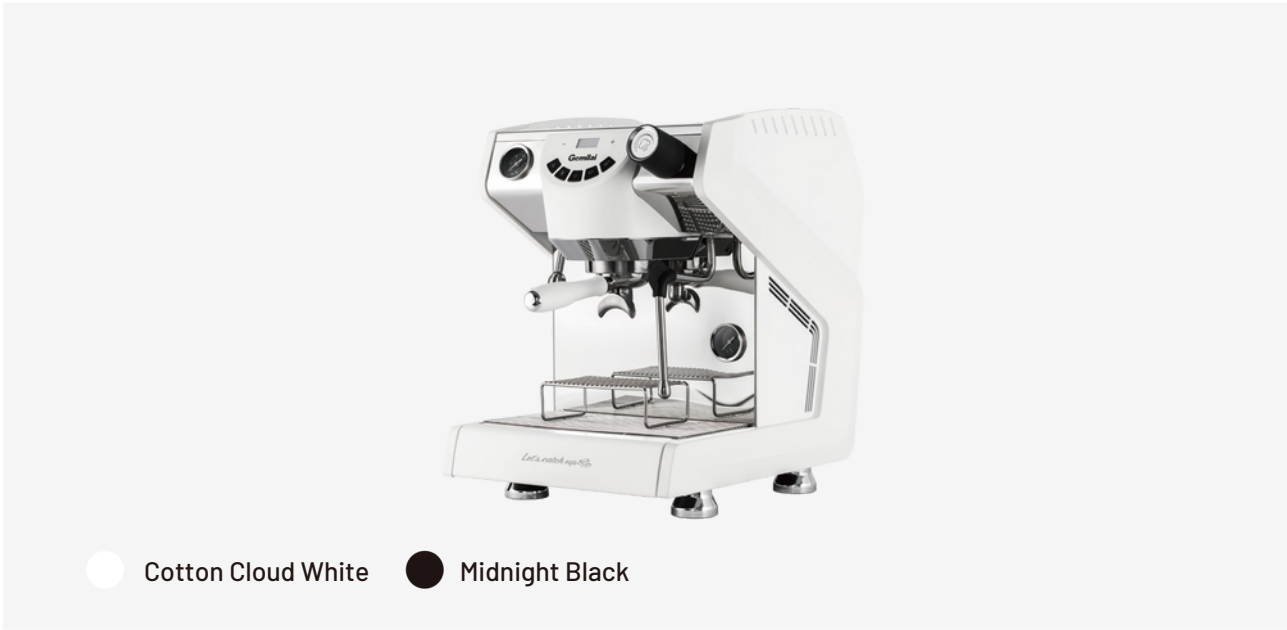

Professional Configuration

-  550mL Brew Boiler
-  1L Steam Boiler
-  Complex Group Head
-  58mm Commercial Brewing System
-  Vibration Pump
-  PID Temperature Control
-  Touch Screen Display
-  Coffee Pressure Gauge
Steam Pressure Gauge

Core Function

- . Dual boiler system, independent heating for extraction and steam
- . Equipped with complex group head, water seamlessly pass, reducing the temperature loss during extraction
- . Convenient preset parameters like extraction temperature / flow / pre-infusion time, etc.
- . Coffee and steam pressure gauge are displayed independently, clearly visible at a glance
- . Commercial 3-hole strong steam for higher frothing efficiency and richer milk foam
- . Removable water tank (1.7L) & automatic water supply and drainage system

Product Parameters

Rated Power
2350W

Rated Voltage/Frequency
220V~ 50Hz

N.W/G.W
22.6kg/27.5kg


Unit/CTN
358x478x467mm/565x461x577mm

Loading Capacity
190PCS/398PCS/400PCS





G3200F

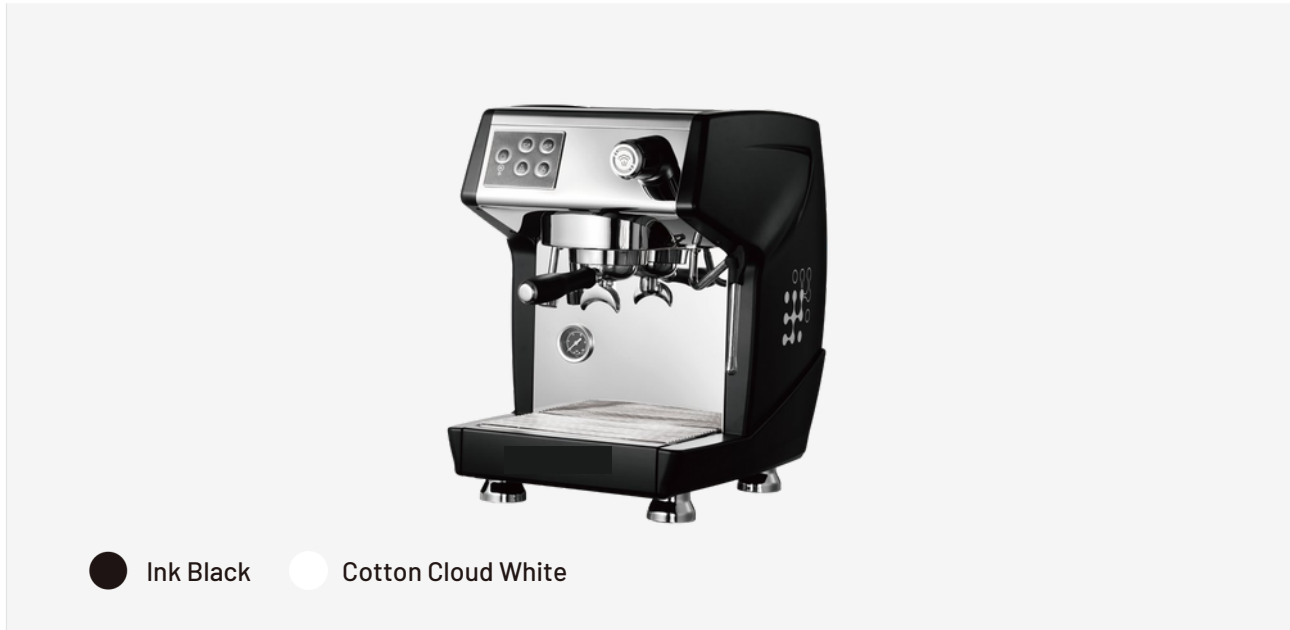

Professional Configuration

-  550mL Brew Boiler
-  1L Steam Boiler
-  Complex Group Head
-  58mm Commercial Brewing System
-  Vibration Pump
-  PID Temperature Control
-  Coffee Pressure Gauge


Core Function

- . Dual boiler system, independent heating for faster and more stable output
- . Automatic pre-infusion function
- . Programmable extraction doses
- . Flexible brew settings (manual or auto mode)
- . 3-hole / 4-hole steam nozzle interchangeable, provides commercial-grade strong and dry steam
- . Removable water tank (1.7L) & automatic water supply and drainage system

Product Parameters

- Rated Power
2650W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
17kg/20.5kg
- Unit/CTN
432x498x345mm/420x510x570mm
- Loading Capacity
234PCS/492PCS/492PCS

G3145B

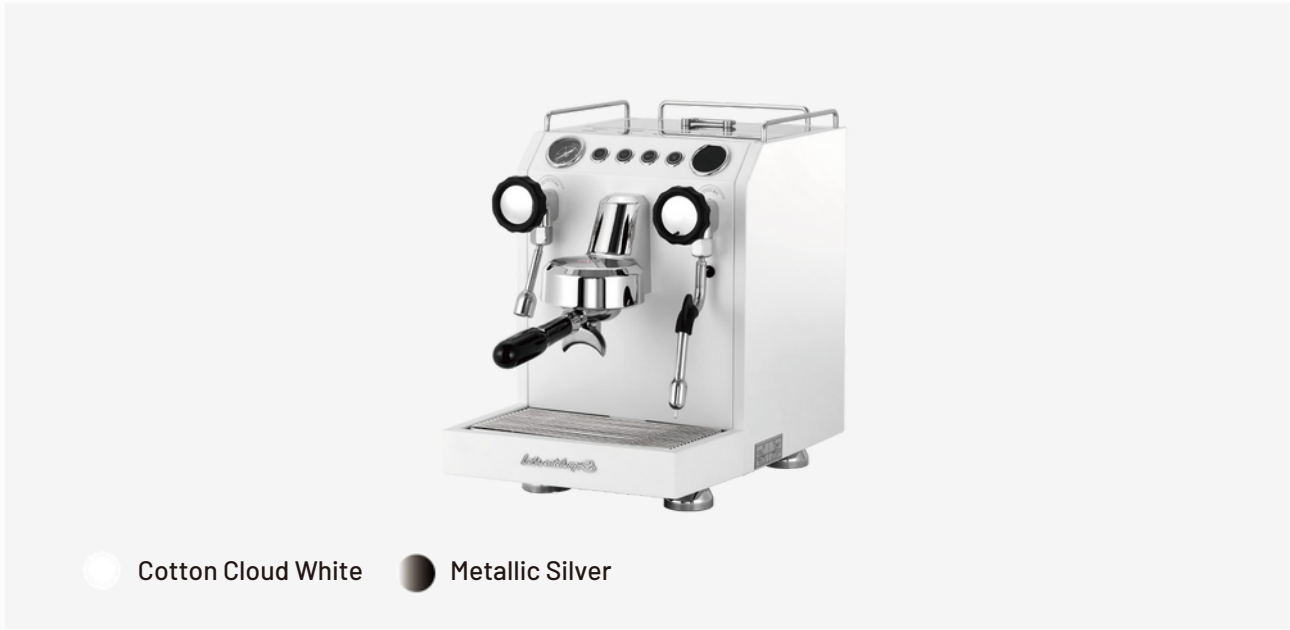

Professional Configuration

-  Brew Thermoblock
-  1L Steam Boiler
-  Thermal Balance Group Head
-  58mm Commercial Brewing System
-  Vibration Pump
-  Dual PID Temperature Control
-  Touch Screen Display
-  Coffee Pressure Gauge

Core Function

- . Hybrid boiler system, allowing simultaneous coffee extraction and milk frothing
- . Thermal balance group head balances temperature to minimize extraction differences
- . Various adjustable parameters: extraction temperature / extraction time / water flowing to coffee bed time / soaking time
- . Steam controlled by an NTC temperature sensor; automatic preset for milk frothing temperature
- . 1L steam boiler and adjustable steam temperature
- . Design of independent hot water nozzle, hot water time can be adjusted
- . 2.5L water tank / automatic water supply and drainage system

Product Parameters








- Rated Power
2900W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
15.7kg/21.9kg
- Unit/CTN
288x418x430mm/492x350x570mm
- Loading Capacity
263PCS/551PCS/552PCS



G3200J



Professional Configuration

-  550mL Brew Boiler
-  Vibration Pump
-  Touch Screen Display
-  58mm Commercial Brewing System
-  Steam Thermoblock
-  PID Temperature Control
-  Coffee Pressure Gauge

Core Function

- . Hybrid boiler system, allowing simultaneous coffee extraction and milk frothing
- . Coffee pressure gauge and touch screen display, designed to give a clear view of the extraction
- . Convenient preset parameters like extraction temperature / extraction flow / pre-infusion time, etc.
- . PID temperature control for precise heating, preventing temperature shifts
- . Powerful and dry 3-hole steam nozzle helps to make rich and creamy foam
- . Removable water tank (1.7L) & automatic water supply and drainage system

Product Parameters

Rated Power
2510-2965W

Rated Voltage/Frequency
220-240V~ 50Hz

N.W/G.W
15.5kg/19kg








Unit/CTN
410x498x342mm/420x570x510mm

Loading Capacity
235PCS/491PCS/492PCS

G3200K



Professional Configuration

-  550mL Brew Boiler
-  Vibration Pump
-  Touch Screen Display
-  58mm Commercial Brewing System
-  1L Steam Boiler
-  PID Temperature Control
-  Coffee Pressure Gauge

Core Function

- . Dual boiler system, independent heating for faster and more stable output
- . Coffee pressure gauge and touch screen display, designed to give a clear view of the extraction
- . Convenient preset parameters like extraction temperature / extraction flow / pre-infusion time, etc.
- . PID temperature control for precise heating, preventing temperature shifts
- . Powerful and dry 3-hole steam nozzle helps to make rich and creamy foam
- . Removable water tank (1.7L) & automatic water supply and drainage system

Product Parameters

Rated Power 2350-2785W

Rated Voltage/Frequency
220-240V~ 50Hz

N.W/G.W
15.5kg/19kg

Unit/CTN
410x498x342mm/420x570x510mm









Loading Capacity
235PCS/491PCS/492PCS



G3035A



Professional Configuration

-  2L Heat Exchanger Boiler
-  Rotary Pump
-  E61 Group Head
-  58mm Commercial Brewing System
-  PID PID Temperature Control
-  Coffee Pressure Gauge
-  Touch Screen Display
-  Stainless Steel Body

Core Function

- . Heat exchanger boiler system allows simultaneous coffee extraction and milk frothing
- . E61 group head maintains consistent heat, offering more stable extraction
- . Variable pressure extraction by flow adjustment rod can customize the flow rate to match different brewing recipes, and enjoy the exploration of variable / segmented extraction
- . Convenient preset parameters like boiler temperature / pre-infusion time, etc.
- . Commercial 3-hole strong steam, flexible steam settings (manual or automatic mode)
- . Removable water tank (1.7L) & automatic water supply and drainage system

Product Parameters

- Rated Power
2100W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
25.5kg/32.5kg
- Unit/CTN
286x395x443mm/565x404x597mm
- Loading Capacity
168PCS/342PCS/456PCS

G3035



Professional Configuration

- 2L Heat Exchanger Boiler
- Vibration Pump
- E61 Group Head
- 58mm Commercial Brewing System
- PID Temperature Control
- Coffee Pressure Gauge
- Touch Screen Display
- Stainless Steel Body

Core Function

- . Heat exchanger boiler system allows simultaneous coffee extraction and milk frothing
- . E61 group head maintains consistent heat, offering more stable extraction
- . Convenient preset parameters like boiler temperature / pre-infusion time, etc.
- . Commercial 3-hole strong steam, flexible steam settings (manual or auto mode)
- . Black walnut wood meets stainless steel, a collision of textures, an aesthetic design
- . Removable water tank (1.7L) & automatic water supply

Product Parameters

- Rated Power
2050W
- Rated Voltage/Frequency
220V~ 50Hz
- N.W/G.W
23.6kg/29.9kg
- Unit/CTN
286x395x443mm/565x404x597mm
- Loading Capacity
168PCS/342PCS/456PCS



WE ARE PROFESSIONAL WITH LOVE
AND LET'S ENJOY THE TASTE OF BLISS

