

SLUSH MACHINE | 10 LITER



Standard Features:

- 10 Liter machine guarantee the production and distribution of frozen drinks quickly at surprisingly low cost.
- These machine represent the best solution for slush, sher. bet, yogurt, cappuccino, and frozen drinks.
- Compact and luxurious in design.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Two large 10 liter hoppers for optimum cooling and serving capacity.
- High quality in compressor and wonderful working perfor-mance.
- LED light in illumination on top of the machine, to make the drinks more attractive.
- R304 stainless steel and ABS body panel for your choice.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ10L×1N



XRJ10L×2N



XRJ10L×3N

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
XRJ10Lx1N	270*580*790	220V-240V 110V-120V	50HZ/60HZ	300	-2~-3°C	28	40
XRJ10Lx2N	470*580*790	220V-240V 110V-120V	50HZ/60HZ	400	-2~-3°C	44	59
XRJ10Lx3N	660*580*790	220V-240V 110V-120V	50HZ/60HZ	500	-2~-3°C	61	80

SLUSH MACHINE | 12 LITER



Standard Features:

- 12 Liter machine guarantee the production and distribution of frozen drinks quickly at surprisingly low cost.
- These machine represent the best solution for slush, sher. bet, yogurt, cappuccino, and frozen drinks.
- Compact and luxurious in design.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Two large 12 liter hoppers for optimum cooling and serving capacity.
- High quality in compressor and wonderful working perfor-mance.
- LED light in illumination on top of the machine, to make the drinks more attractive.
- R304 stainless steel and ABS body panel for your choice.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ12L×1T



XRJ12L×2T



XRJ12L×3T

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
XRJ12Lx1T	220*510*770	220V-240V 110V-120V	50HZ/60HZ	500	-2~-3°C	29	40
XRJ12Lx2T	430*510*770	220V-240V 110V-120V	50HZ/60HZ	600	-2~-3°C	44	56
XRJ12Lx3T	610*510*770	220V-240V 110V-120V	50HZ/60HZ	800	-2~-3°C	63	76

SLUSH MACHINE

Standard Features:

- Compact and luxurious in design.
- Advanced electronic temperature controller with a digital display that indicated the temperature of the beverages.
- Frozen and liquid drinks 2 in 1 machine.
- Night mode to keep the drinks fresh over night.
- Very simple to program and run with touch pad display which also guides cleaning and preventive maintenance.
- Lighted displays for merchant graphics.
- Internally monitored refrigeration system to ensure long lasting performance.
- High quality in compressor and wonderful working performance.
- LED light in illumination.
- Food-grade high density polycarbonate bowl, health and environmental protection.
- Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



MINI ICE CREAM MACHINE

Standard Features:

- Soft ice cream and Slush Juice 3 in 1 machine.



ICE8L-Digital



ICE8Lx2-Digital

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
ICE8L-Digital	260*420*740	220V-240V 110V-120V	50HZ	600	-3~-8°C	30	40
ICE8Lx2-Digital	470*420*740	220V-240V 110V-120V	50HZ	900	-3~-8°C	43	54

HOT CHOCOLATE MACHINE

Standard Features:

- Varied kinds of hot drinks can be served by this lovely product.
- such as hot chocolate, tea, coffee,milk, soup and mulled wine,etc.
- Sleek and compact design ,easy for operation.
- Electronic heating system with a wide controller range of temperature 30 °C to 90 °C.
- LED screen with Press-button, wich show the heat temperature very clear at a glance.
- Super stronger mixing paddle,drives the liquid uniformly and no-stick.
- All plastics parts made of food grade polycarbonate which was unbreakable and easy for clean.
- Food grade #304 stainless steel base plate with thermal protector.



NANO3Lx2



XRJ12Lx2M

Model no	Dimensions (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
NANO3Lx2	370*330*430	220V-240V 110V-120V	50HZ/60HZ	380	-2~-3°C	22	27
XRJ12Lx2M	380*620*760	220V-240V 110V-120V	50HZ/60HZ	600	-2~-3°C	64	78



CH5L



CH10L

Model no	Dimension (mm)	Voltage (v)	Frequency (Hz)	Hot Power (w)	Motor Power (w)	Temperature Range (°C)	N.W (kg)	W.G (kg)
CH5L	400*320*470	220V-240V 110V-115V	50-60	400	40	30-90	6	9
CH10L	400*320*570	220V-240V 110V-115V	50-60	400	40	30-90	7	10

Slush machine


Compact and luxurious in design.
Frozen and liquid drinks 2 in 1 machine.
Night mode to keep the drinks fresh over night.
Two large 12 liter hoppers for optimum cooling and serving capacity.
High quality in compressor and wonderful working performance.
LED light in illumination on top of the machine,to make the drinks more attractive.
R304 stainless steel and ABS body panel for your choice.
Food-grade high density polycarbonate bowl, healty and envrionmental protection.
Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ12L x1

技术参数
Technical parameter

型号(Model): **XRJ12LX1**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 400W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 220×490×810
纸箱尺寸mm(Carton Packing): 250×520×830
木箱尺寸mm(Wooden Packing): 280×550×880
净重kg(Net Weight): 28
毛重kg(Gross weight): 40

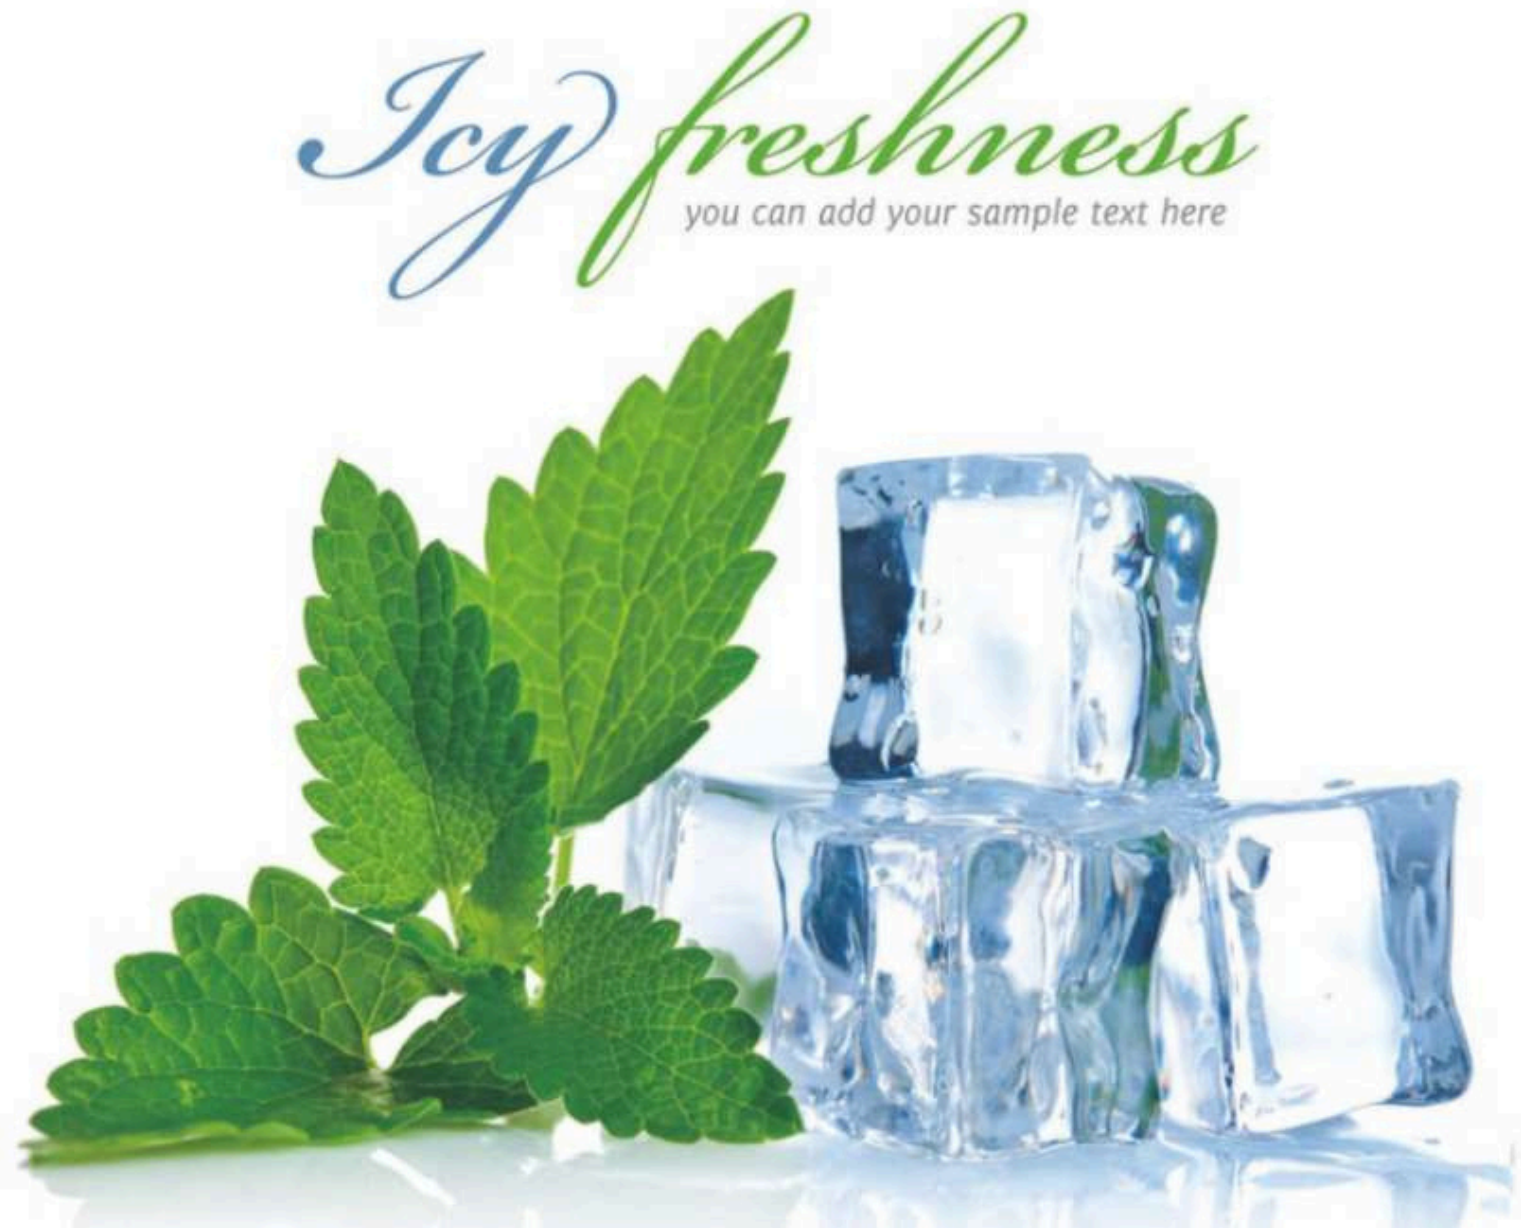

技术参数
Technical parameter

型号(Model): **XRJ12Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 44
毛重kg(Gross weight): 55



XRJ12Lx2

技术参数
Technical parameter

型号(Model): **XRJ12Lx3**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 610×510×770
纸箱尺寸mm(Carton Packing): 620×530×830
木箱尺寸mm(Wooden Packing): 660×550×870
净重kg(Net Weight): 63
毛重kg(Gross weight): 78



XRJ12Lx3



XRJ12Lx3

技术参数
Technical parameter

型号(Model): **XRJ12Lx3**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 610×510×770
纸箱尺寸mm(Carton Packing): 620×530×830
木箱尺寸mm(Wooden Packing): 660×550×870
净重kg(Net Weight): 63
毛重kg(Gross weight): 78

技术参数
Technical parameter

型号(Model): **XRJ12Lx3**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 610×510×770
纸箱尺寸mm(Carton Packing): 620×530×830
木箱尺寸mm(Wooden Packing): 660×550×870
净重kg(Net Weight): 63
毛重kg(Gross weight): 78



XRJ12Lx3

技术参数
Technical parameter

型号(Model): **XRJ12Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 42
毛重kg(Gross weight): 53



XRJ12Lx2



XRJ12Lx2

技术参数
Technical parameter

型号(Model): **XRJ12Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 42
毛重kg(Gross weight): 53

技术参数
Technical parameter

型号(Model): **XRJ12Lx3T**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 610×510×770
纸箱尺寸mm(Carton Packing): 620×530×830
木箱尺寸mm(Wooden Packing): 660×550×870
净重kg(Net Weight): 63
毛重kg(Gross weight): 78



XRJ12Lx3T

技术参数
Technical parameter

型号(Model): **XRJ12Lx2T**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 44
毛重kg(Gross weight): 55



XRJ12Lx2T

技术参数
Technical parameter

型号(Model): **XRJ12Lx2T**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 44
毛重kg(Gross weight): 55



XRJ12Lx2T

技术参数
Technical parameter

型号(Model): **XRJ12Lx2T**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 430×510×770
纸箱尺寸mm(Carton Packing): 440×510×830
木箱尺寸mm(Wooden Packing): 470×550×870
净重kg(Net Weight): 44
毛重kg(Gross weight): 55



XRJ12Lx2T



Frozen beverage dispenser with more powerful auger technology for supeior mixing and freezing. Various kinds of cold drinks can be served by our machine, such as slush, sherbet, smoothies,coffee ,frozen cocktail and frozen drinks.

.....

Compact and luxurious in design.
Advanced electronic temperature controller with a digital display that indicated the temperature of the beverages.
Frozen and liquid drinks 2 in 1 machine.
Night mode to keep the drinks fresh over night.
Two large 12 liter bowls for optimum cooling and serving capacity.
Very simple to program and run with touch pad display which also guides cleaning and preventive maintenance.
Lighted displays for merchant graphics.
Internally monitored refrigeration system to ensure long lasting performance.
High quality in compressor and wonderful working performance.
LED light in illumination.
Food-grade high density polycarbonate bowl, health and environment protection.
Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ12LX2M

技术参数 Technical parameter

型号(Model): **XRJ12Lx2M**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2°C~~3°C
外形尺寸mm(Shape size): 380×620×760
纸箱尺寸mm(Carton Packing): 420×660×800
木箱尺寸mm(Wooden Packing): 460×680×860
净重kg(Net Weight): 64
毛重kg(Gross weight): 78





Classics design model, your preferential choice for first time to use slush machine. Already optimized cooling system to keep the perfect cooling performance.

Removable and super strong bowl , virtually unbreakable polycarbonate .
Automatically shuts down refrigeration (stop compressor) when product reaches desired thickness.
R304 stainless steel body with elegant design.
15 liter super big capacity bowl to keep the large supply at short time.
Unique double side evaporating cylinder.
Magnetic drive reduce the energy loss.
Food-grade high density polycarbonate bowl, healthy and environmental protection.
Bowl and faucet easy to disassemble for quick cleaning and utmost hygiene.



XRJ15LX3

技术参数
Technical parameter

型号(Model): **XRJ15Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 400W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 420×560×760
纸箱尺寸mm(Carton Packing): 450×590×780
木箱尺寸mm(Wooden Packing): 470×620×840
净重kg(Net Weight): 41
毛重kg(Gross weight): 55



XRJ15LX2



XRJ15LX1

技术参数
Technical parameter

型号(Model): **XRJ15Lx1**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 300W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 290×560×760
纸箱尺寸mm(Carton Packing): 340×580×780
木箱尺寸mm(Wooden Packing): 360×620×840
净重kg(Net Weight): 29
毛重kg(Gross weight): 40

技术参数
Technical parameter

型号(Model): **XRJ10Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 400W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 420×560×760
纸箱尺寸mm(Carton Packing): 450×590×780
木箱尺寸mm(Wooden Packing): 470×620×840
净重kg(Net Weight): 41
毛重kg(Gross weight): 55



XRJ10LX2

技术参数
Technical parameter

型号(Model): **XRJ10Lx1**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 300W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 290×560×760
纸箱尺寸mm(Carton Packing): 340×580×780
木箱尺寸mm(Wooden Packing): 360×620×840
净重kg(Net Weight): 29
毛重kg(Gross weight): 40



XRJ10LX1



XRJ10LX3

技术参数
Technical parameter

型号(Model): **XRJ10Lx3**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 600×560×760
纸箱尺寸mm(Carton Packing): 610×660×780
木箱尺寸mm(Wooden Packing): 620×670×840
净重kg(Net Weight): 58
毛重kg(Gross weight): 74

技术参数
Technical parameter

型号(Model): **XRJ15LX1N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 400W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 270X580X790
纸箱尺寸mm(Carton Packing): 300X640X810
木箱尺寸mm(Wooden Packing): 330X670X860
净重kg(Net Weight): 28
毛重kg(Gross weight): 40



XRJ15LX1N

技术参数
Technical parameter

型号(Model): **XRJ15LX3N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 660X580X790
纸箱尺寸mm(Carton Packing): 690X640X810
木箱尺寸mm(Wooden Packing): 720X670X860
净重kg(Net Weight): 61
毛重kg(Gross weight): 81



XRJ15LX3N



技术参数
Technical parameter

型号(Model): **XRJ15LX2N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 470X580X790
纸箱尺寸mm(Carton Packing): 490X640X810
木箱尺寸mm(Wooden Packing): 520X670X860
净重kg(Net Weight): 44
毛重kg(Gross weight): 59



XRJ15LX2N



XRJ10Lx1N

技术参数
Technical parameter

型号(Model): **XRJ10Lx1N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 300W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 270X580X790
纸箱尺寸mm(Carton Packing): 300X640X810
木箱尺寸mm(Wooden Packing): 330X670X860
净重kg(Net Weight): 28
毛重kg(Gross weight): 40

技术参数
Technical parameter

型号(Model): **XRJ10Lx2N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 400W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 470X580X790
纸箱尺寸mm(Carton Packing): 490X640X810
木箱尺寸mm(Wooden Packing): 520X670X860
净重kg(Net Weight): 44
毛重kg(Gross weight): 59



XRJ10Lx2N

技术参数
Technical parameter

型号(Model): **NANO 3Lx2**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 380W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 370x330x430
纸箱尺寸mm(Carton Packing): 400x360x460
净重kg(Net Weight): 22
毛重kg(Gross weight): 27



NANO 3Lx2

技术参数
Technical parameter

型号(Model): **XRJ10Lx3N**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 500W
冷冻时平均温度(Cold-beverage temperture): -2℃~-3℃
外形尺寸mm(Shape size): 660X580X790
纸箱尺寸mm(Carton Packing): 690X640X810
木箱尺寸mm(Wooden Packing): 720x670x860
净重kg(Net Weight): 61
毛重kg(Gross weight): 80



XRJ10Lx3N





ICE 6L–digital

技术参数
Technical parameter

型号(Model): **ICE 6L-digital**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): 7°C ~ - -7°C
外形尺寸mm(Shape size): 260X420X740
纸箱尺寸mm(Carton Packing): 300X480X750
木箱尺寸mm(Wooden Packing): 340X520X810
净重kg(Net Weight): 30
毛重kg(Gross weight): 40

技术参数
Technical parameter

型号(Model): **ICE 6LX2-digital**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 900W
冷冻时平均温度(Cold-beverage temperture): 7°C ~ - -7°C
外形尺寸mm(Shape size): 470X420X740
纸箱尺寸mm(Carton Packing): 480X440X750
木箱尺寸mm(Wooden Packing): 520X480X810
净重kg(Net Weight): 43
毛重kg(Gross weight): 54



ICE 6LX2– digital

技术参数
Technical parameter

型号(Model): **ICE 6L-touch**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 600W
冷冻时平均温度(Cold-beverage temperture): 7°C ~ - -7°C
外形尺寸mm(Shape size): 260X420X740
纸箱尺寸mm(Carton Packing): 300X480X750
木箱尺寸mm(Wooden Packing): 340X520X810
净重kg(Net Weight): 30
毛重kg(Gross weight): 40



ICE 6L–touch

技术参数
Technical parameter

型号(Model): **ICE 6LX2-touch**
电压(Voltage): 220-240V/110-115V
频率(Frequency): 50/60HZ
冷冻功率(Cold power): 900W
冷冻时平均温度(Cold-beverage temperture): 7°C ~ - -7°C
外形尺寸mm(Shape size): 470X420X740
纸箱尺寸mm(Carton Packing): 480X440X750
木箱尺寸mm(Wooden Packing): 520X480X810
净重kg(Net Weight): 43
毛重kg(Gross weight): 54



ICE 6LX2– touch