



2025

2025



2025 极效产品
CATALOGUE



07-20

诺宾炉系列 SmartTech series



- 07-16 微波热风快速烤箱 High Speed Oven
- 17-18 小型微波烤箱 Microwave Meo Oven
- 19-20 微波蒸柜 Microwave Steamer

21-40

诺宾万能蒸烤箱系列 SmartTech Combi series



- 21-36 万能蒸烤箱 SmartTech Combi
- 37-40 烧烤炉 Electric Roaster

41-68

歌兰德系列 Grand series



- 41-50 炸炉系列 GrandFryer
- 51-58 履带式电热披萨炉系列 GrandOven
- 59-60 链式烤鱼炉 Conveyor Fish Roaster
- 61-64 保温柜系列 GrandHold
- 65-66 单双头双面煎扒炉 Clamshell Grill Lite
- 67-67 台式扒炉 Countertop Heavy-Duty Griddle
- 68-68 单双头电热煎饺机 Countertop electric dumpling griddle

69-74

乐飘逸系列 Lapiioey series



- 69- 高温智能蒸柜 Electric Hyper Steamer
- 72 电热升降煮面炉 Electric Auto-lift Noodle Cooker
- 73- 简易蒸烤箱 Economic Combi Oven
- 73
- 74-
- 74



SmartTech

CRAFTED ANEW,
EXPERIENCED BEYOND

诺宾炉

WHY SmartTech® ?

SmartTech 诺宾炉系列产品旨在为客户提供极速、节能、易于操作的烹饪解决方案，让用户即使在配餐高峰仍然得心应手、从容应对。SmartTech 诺宾炉集合了微波技术、冲击热风，实现极速加热、加热均匀一致及食物表面爽脆色泽诱人的烘焙效果。多段烹饪程序，每段烹饪灵活选择热风、高低风速、微波输出功率，组合丰富多样，再复杂的菜品也能出色完成。

The SmartTech series products are designed to provide customers with extremely fast, energy-saving and easy to-operate cooking solutions, so that operators can still be handy even during peak hours. With the combination of microwave, vertical hot air impingement, SmartTech rapid oven makes food heated fast, evenly and crisp with attractive color. SmartTech Micro computer provides multi-stages cooking cycle for each recipe. Each cooking cycle includes a combination settings of microwave, vertical hot air impingement, providing a wide range of cooking application.



* 产品规格及设计如有变更，恕不另行通知；
产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to
change without notice. The appearance of the
product is subject to the actual product, and the
above parameters are for reference only.



新鲜美味的秘诀在于快速烹饪，保留原味。

无论是冷冻还是冷藏食材，经过诺宾炉高效微波快速加热，减少营养流失，保持食物原味和营养。

热风循环加热均匀，食物表面鲜酥香脆，色泽诱人。

The secret to fresh, flavorful cuisine lies in rapid cooking that preserves natural essence.

Whether handling frozen or refrigerated ingredients, SmartTech leverage high-efficiency microwave rapid heating to minimize nutrient loss while retaining original taste and nutritional integrity.

Complemented by a precision convection heating system, the technology ensures uniform heat distribution, delivering crispy golden exteriors, tender interiors, and visually appealing results.



* 产品规格及设计如有变更，恕不另行通知；
产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

USE FUNCTION

烹饪方式



超强热风快速加热
HOT AIR IMPINGEMENT



微波和热风冲击混合加热
COMBINATION OF MICROWAVE & IMPINGEMENT



微波快速加热
MICROWAVE RAPID HEATING



微波解冻，回温食物
FROZEN FOOD THAWING



高效微波
EFFICIENT MICROWAVE



超强热风冲击
HOT AIR IMPINGEMENT



微波和热风冲击
混合加热
COMBINATION OF
MICROWAVE &
IMPINGEMENT



EXTREME SPEED
COOKING SOLUTION

极速烹
饪解决
方案

SmartTech Speed Oven

高效智能 | 极速出餐

EFFICIENT INTELLIGENCE
EXTREME SPEED

全新大平面玻璃+7寸触摸屏

Features of model with 7-inch touch screen TFT

新 SiTngs 采用 7 英寸 TFT 触摸屏，分辨率更高，反应速度更快

The new SiTngs features a 7-inch TFT touchscreen with higher resolution and faster response speed.



全新大容量

内腔空间升级

A brand-new, high-capacity internal cavity.

新 SiTngs 内腔空间更大，可放置食物更多

The new SiTngs chamber offers a larger capacity, allowing for more food placement.



FEATURES / 产品特点

- ◆ 100+ 个标准菜单储存能力
- ◆ 菜单可设置分段烹调程序
- ◆ 配置变频电机，每段烹调程序自由选择 10 档垂直冲击风、11 档微波功率输出
- ◆ 多重安全保护，微波锁止安全门设计
- ◆ 内置油烟过滤网、催化酶除味 *
- ◆ 标准菜单模式、自选模式
- ◆ 菜单保密功能、权限管理
- ◆ 系统自诊断功能
- ◆ 防空载提醒功能、菜单烹调流程定义功能
- ◆ 支持 IOT 无线互联，可实现设备数据信息共享

- ◆ 100+ standard menu storage capacity ◆ The menu can be set to phase cooking program ◆ Equipped with a variable frequency motor ◆ Adjustable blower speed range from 10% to 100% in 10% increment
- ◆ Microwave power range from 0% to 100% in 10% increment
- ◆ Multiple safety protection, microwave lock safety door design
- ◆ Built-in oil smoke filter and catalytic converter* ◆ Standard menu mode, customized mode ◆ Menu confidential function, authority management ◆ System self-diagnosis function ◆ Anti-empty load reminder function, menu cooking process naming function ◆ IOT wireless interconnection. Smart connect allows real-time access to

your device via any smart device


* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数仅供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



品质源于细节

QUALITY LIES IN THE DETAILS

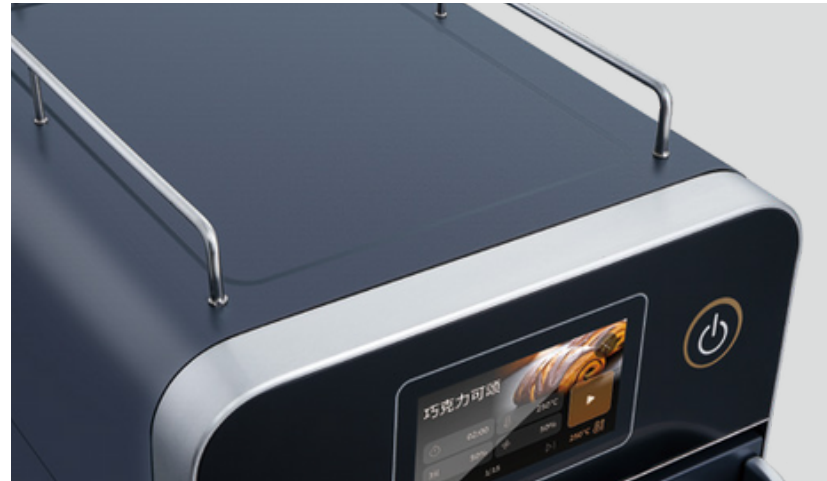

微波热风快速烤箱

HIGH SPEED OVEN

全·新·推·出
NEW



NT-SiTngs



小功率, 16A 以下插头可用
适用性更广

Low power, plugs below 16A are available
Wider applicability



NT-ProBT



双微波, 大功率
效率更高, 出餐速度快
Dual microwave, high power
More efficient,
faster meal delivery



NT-WK



双微波、大功率、
内腔尺寸大, 可烹饪体积较大食物
Dual microwaves, high power,
large internal cavity,
can cook larger food

可选颜色
Color available



* 产品规格及设计如有变更, 恕不另行通知; 产品外观以实物为准, 以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更, 恕不另行通知; 产品外观以实物为准, 以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



产品型号 Model		NT-SiTngs
微电脑控制板型号 Micro Computer		7英寸触摸屏 (7" Touch Screen CTL) 450 × 647 × 660 (含顶部架子) 450 × 647 × 612 (不含顶部架子)
产 品 尺 寸 Product Size W×D×H (mm)		317 × 315 × 188 (12.5"×12.4"×7.4")
内 膛 尺 寸 Chamber Size W×D×H (mm)		770 × 565 × 840
包装尺寸 Packing SizeW×D×H (mm)		18L
容 积 Capacity (Liter)		208-240V~,50/60Hz
电压/频率 Voltage & Frequency		3.5kW
额定功率 Rated Power		60.5
净重 Net Weight (kg)		84
毛重 Gross Weight (kg)		
烹饪段数 Cooking Stage		10
微波功率 Microwave Power		1.5kW
热风功率 Hotair Power		3kW
风速段数 Blower Speed		10 档 (Grade)
可存储菜单数 Stock Menu		100+
最高烹饪温度 Max Cooking Temp		280°C
微波输出范围 Microwave Output Range		0-100%, in 10% increment
烹饪模式 Cooking Mode	热风冲击	●
	Vertical hot air impingement	●
	微波 Microwave	●
	底部循环热风 Bottom convection	●
催化酶 Catalytic Converters		●
USB Port		●
防水等级 IP Rating		IPX3
认证类型 Cer tificate		CE
可选颜色 Colour Available		不锈钢原色、黑色、红色、咖啡色 Black/Red/Coffee/SSL

产品型号 Model		NT-ProSiT
微电脑控制板型号 Micro Computer		5英寸触摸屏 (5" Touch Screen CTL)
产 品 尺 寸 Product Size W×D×H (mm)		460 × 675 × 660
内 膛 尺 寸 Chamber Size W×D×H (mm)		305 × 305 × 185 (12"×12"×7.3")
包装尺寸 Packing SizeW×D×H (mm)		770 × 565 × 840
容 积 Capacity (Liter)		17 L
电压/频率 Voltage & Frequency		208-240V~, 50/60Hz
额定功率 Rated Power		3.5kW
净重 Net Weight (kg)		66
毛重 Gross Weight (kg)		88.5
烹饪段数 Cooking Stage		15
微波功率 Microwave Power		1.5kW
热风功率 Hotair Power		3kW
风速段数 Blower Speed		10 档 (Grade)
可存储菜单数 Stock Menu		100+
最高烹饪温度 Max Cooking Temp		280°C
微波输出范围 Microwave Output Range		0-100%, in 10% increment
烹饪模式 Cooking Mode	热风冲击	●
	Vertical hot air impingement	●
	微波 Microwave	●
	底部循环热风 Bottom convection	●
催化酶 Catalytic Converters		●
USB Port		●
防水等级 IP Rating		IPX3
认证类型 Cer tificate		CE UK EN IEC S
可选颜色 Colour Available		不锈钢原色、黑色、红色 Black/Red/SSL

● 有Yes — 无Nil

配件列表 | Accessories List

ALUMINUM GRILL PLATE 铝 扒 板 	适于/ GOOD FOR NT-ProBT/NT-ProBT-D NT-WK 用于/ USED FOR 三明治/ SANDWICH 牛排/ STEAK 鸡中翅/ CHICKEN WING	ROUND PIZZA PAN 圆形披萨盘 	仅适用/ GOOD FOR NT-SiTngs NT-WK NT-ProSiT 用于/ USED FOR 披萨/ PIZZA
---	---	---	--



* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



产品型号 Model		NT-ProBT/NT-ProBT-D
微电脑控制板型号 Micro Computer		5英寸触摸屏 (5" Touch Screen CTL)
产 品 尺 寸 Product Size W×D×H (mm)		460 × 677 × 660
内 膛 尺 寸 Chamber Size W×D×H (mm)		317 × 294 × 193 (12.5"×11.6"×7.6")
包装尺寸 Packing SizeW×D×H (mm)		770 × 565 × 840
容 积 Capacity (Liter)		17 L
电压/频率 Voltage & Frequency		380-415V 3N~, 220-240V ~, 50/60Hz
额定功率 Rated Power		6.3kW
净重 Net Weight (kg)		81
毛重 Gross Weight (kg)		96
烹饪段数 Cooking Stage		15
微波功率 Microwave Power		1.5kW×2
热风功率 Hotair Power		3.0kW+2.5kW
风速段数 Blower Speed		10 档 (Grade)
可存储菜单数 Stock Menu		100+
最高烹饪温度 Max Cooking Temp		280°C
微波输出范围 Microwave Output Range		0-100%, in 10% increment
烹饪模式 Cooking Mode	热风冲击	●
	Vertical hot air impingement	●
	微波 Microwave	●
	底部循环热风 Bottom convection	●
催化酶 Catalytic Converters		●
USB Port		●
防水等级 IP Rating		IPX3
认证类型 Cer tificate		CE
可选颜色 Colour Available		不锈钢原色、黑色、红色 Black/Red/SSL

● 有Yes — 无Nil



TEFLON MESH BASKET 特氟龙网格篮 	仅适用/ GOOD FOR NT-ProBT/NT-ProBT-D NT-SiTngs NT-WK 用于/ USED FOR 牛角包/ CROISSANT 鸡中翅/ CHICKEN WING 贝 果 / BAGELS	ROUND TEFLON MESH PAD 圆形特氟龙网格垫 	仅适用/ GOOD FOR NT-ProBT/NT-ProBT-D NT-SiTngs 用于/ USED FOR 披萨/ PIZZA 烹饪面包类，可搭配披萨盘使用 Cooking bread, can be used with pizza pan
---	--	--	---

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



紧凑型设计 美味更轻松

COMPACT DESIGN
EASY & TASTY



FEATURES / 产品特点

- ◆ 紧凑型设计，节省空间，外观简洁，操作便捷
- ◆ 加热管与微波结合，实现快速烹饪。上下加热管烘烤着色，微波整体加热，大幅缩短烹调时间，提高效率
- ◆ 配备 6.8 英寸触摸屏，界面简洁直观，操作方便
- ◆ 可存储 100+ 个菜单，每个菜单支持 5 段烹饪程序，可独立调节加热管及微波。支持 U 盘上传下载，便于统一管理
- ◆ 设备可进入节能模式，空闲时低温运行，节省能源，退出后可快速回温至烹饪状态
- ◆ 支持 IOT 无线互联（可选配）

- ◆ Compact design with space-saving footprint, sleek appearance, and user-friendly operation.
- ◆ Dual heating elements and microwave technology enable rapid cooking: Upper/lower heating elements ensure even browning, while microwave accelerates core heating, greatly reduce cooking time and enhance efficiency.
- ◆ Features a 6.8-inch touchscreen with intuitive interface for precise control.
- ◆ Stores 100+ programmable recipes, each customizable with 5-stage cooking programs with independent control of heating elements and microwave power. USB port enables recipe upload/download for centralized management.
- ◆ Energy-saving mode maintains low-power standby during idle, reducing consumption and with instant recovery to cooking temperature.
- ◆ Optional IOT connectivity supports wireless integration for remote monitoring and smart kitchen management.

» MICROWAVE MEO OVEN 小型微波烤箱



NT-MWO-T



NT-MWO-D

产品型号 Model		NT-MWO-T
产品尺寸 Product Size W×D×H (mm)	宽 W	490
	深 D	538
	高 H	361
内腔尺寸 Chamber Size (mm)	宽 W	270 (10.6")
	深 D	190 (7.5")
	高 H	168 (6.6")
包装尺寸 (mm)Packing SizeWxDxH		613 x 601 x 433
电压/频率 Voltage & Frequency		208-240V 1N~,50/60Hz
额定电流 Rated current		15A
微波功率 Microwave Power		1.5kW
可存储菜单数 Stock Menu		100+
最高烹饪温度 Max.Temp.		250°C
额定功率 Power		3.3kW
加热管输出功率 上加热管 ^{Top}		1kW
Heating Element Power 下加热管 ^{Bottom}		0.7kW
净重Net Weight (kg)		40
毛重Gross Weight(kg)		45

产品型号 Model		NT-MWO-D
产品尺寸 Product Size W×D×H (mm)	宽 W	490 544 361 270 (10.6")
	深 D	190 (7.5")
	高 H	168 (6.6") 613 x 601 x 433
内腔尺寸 Chamber Size (mm)	宽 W	208-240V 1N~,50/60Hz
	深 D	15A 1.5kW
	高 H	10
包装尺寸 (mm)Packing SizeWxDxH		250°C
电压/频率 Voltage & Frequency		3.3kW
额定电流 Rated current		1kW
微波功率 Microwave Power		0.7kW
可存储菜单数 Stock Menu		40
最高烹饪温度 Max.Temp.		45
额定功率 Power		
加热管输出功率 上加热管 ^{Top}		
Heating Element Power 下加热管 ^{Bottom}		
净重Net Weight (kg)		
毛重Gross Weight(kg)		

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



诺宾万能蒸烤箱系列

NEW DESIGN
REDEFINING CULINARY FRONTIERS
NEXT-GEN EXPERIENCE

全新设计 重塑烹饪格局·新体验

全新第五代 万能蒸烤箱

®

Brand-new 5th Generation SmartTech® Combi Oven
Powerful Cooking Performance · Intelligent Control System

NEW-GEN
CONTROL PANEL
10-INCH TFT
TOUCHSCREEN

新一代 控制板

10IN

TFT 触摸屏

分辨率更高，画面更清晰，
反应速度快 2 倍

Higher resolution, clearer visuals, and
2 times faster response




全新 UI 设计界面 操作直观顺滑 绝佳烹饪操作体验

BRAND-NEW UI DESIGN WITH
INTUITIVE AND SMOOTH OPERATION
FOR AN EXCEPTIONAL COOKING
EXPERIENCE



品质源于细节

QUALITY LIES IN THE DETAILS

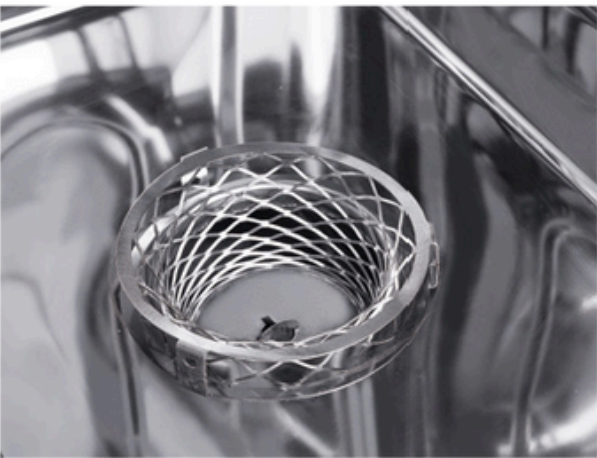

触摸屏系列

Touch screen series

SmartTech Combi®
万能蒸烤箱

开源式控制系统可快速满足新零售智能厨房业态延展性功能需求，支持大数据管理功能。
Equipped with an open-source control system for adaptability to new retail smart kitchens, it delivers modular scalability and integrated big data management.

IT FITS ANY KITCHENS | 它 | 适合任何厨房

从NC0423T Mini到NC2021T Plus

任何规模的厨房，无论是开放式厨房或者是中央食品加工厂，均可找到适合的配置。
From NC0423T Mini to NC2021T Plus Any size kitchen, whether it is an open kitchen or a central food processing plant, can find a suitable configuration.



* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

烹饪是膳食的艺术 合适的温度恰到好处

Cooking is the art of meals, with the right temperature

烹饪百变·样样精通

Variety of cooking, all proficient

30~300°C宽域烹饪温度调节、Delta T温差控制和多段烹饪控制完美实现中式爆炒、焖、蒸、炖、烧烤等不同烹饪方式。

Wide range cooking temperature regulation at 30 - 300°C, Delta T temperature difference control and multi-stage cooking control perfectly realize different cooking methods such as fried, steamed, stewed, barbecued, etc.



SmartTech Combi

全新第五代万能蒸烤箱

产品规格表 MODEL TABLE



NC2011NGS+
可选配，保温餐车/层架车
尺寸 Size: 462×700×1713mm

产品型号 Model	NC2021TI 40 层万能蒸烤箱 40-tray combi oven	NC2011NGS+ 20 层万能蒸烤箱 20-tray combi oven	NC1011NGS+ 10 层万能蒸烤箱 10-tray combi oven
名称 Name	7寸触摸屏	10寸触摸屏	10 寸触摸屏
控制器 Control	(7" Touch Screen CTL)	(10" Touch Screen CTL)	(10" Touch Screen CTL)
产品尺寸 (mm) Product Size W×D×H	1232 × 1069 × 1918	860 × 855 × 1821(含把手)	853 × 843 × 1063(含把手)
内腔尺寸 (mm) Chamber Size W×D×H	736 × 856 × 1510	440 × 637 × 1500	440 × 637 × 767
包装尺寸 (mm) Packing SizeW×D×H	1250 × 1140 × 2050	1010 × 980 × 2015	1014 × 974 × 1292
电压/频率 Voltage & Frequency	380-415V 3N~, 50/60Hz	380-415V 3N~ 50/60Hz	380-415V 3N~ 50/60Hz
总功率 Rated Power	6 4.6kW	36.6kW	18.3kW
净重 Net Weight (kg)	428	323	181
毛重 Gross Weight (kg)	448	368	208
锅炉 Boiler	带锅炉 With Boiler	●	●
	功率 Boiler Power	45kW	18kW
烘烤功率 Roast Power	64kW	36kW	18kW
容量 Capacity	40 × 1/1GNP	20×1/1GNP	10 × 1/1GNP
配置网架数 No. of Rack	选配 /Optional	选配 /Optional	选配 /Optional

● 有Yes — 无Nil

NC1011NGSi 10 层万能蒸烤箱 10-tray combi oven	NC0611NGS+ 6 层万能蒸烤箱 6-tray combi oven	NC0611NGSi 6 层万能蒸烤箱 6-tray combi oven	NC0423T 4 层万能蒸烤箱 4-tray combi oven
10 寸触摸屏 (10" Touch Screen CTL)	10 寸触摸屏 (10" Touch Screen CTL) 853 × 843 × 821(含把手)	10 寸触摸屏 (10" Touch Screen CTL)	7 寸触摸屏 (7" Touch Screen CTL)
853 × 843 × 1063(含把手)	440 × 637 × 525	853 × 843 × 821(含把手)	744 × 657 × 704
440 × 637 × 767		440 × 637 × 525	370 × 460 × 380
1014 × 974 × 1292	1014 × 974 × 1087	1014 × 974 × 1087	810 × 750 × 875
380-415V 3N~ 50/60Hz	380-415V 3N~ 50/60Hz	380-415V 3N~ 50/60Hz	380-415V 3N~, 50/60Hz、 220V-240V ~, 50/60Hz
18.3kW	11.1kW	11.1kW	6.1kW
161	144	129	75
188	168.5	153.5	113
-	●	-	●
-	9kW	-	5.4kW
18kW	10.8kW	10.8kW	5.8kW
10×1/1GNP	6×1/1GNP	6×1/1GNP	4 × 2/3GNP
选配 /Optional	选配 /Optional	选配 /Optional	选配 /Optional

● 有Yes — 无Nil

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



歌兰德炸炉系列
GRANDFRYER series

*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



IOT WIRELESS INTERCONNECTION
IOT 无线互联

智能互联允许通过智能设备实时连接访问您的设备。
Smart connect allows real-time access to your device via any smart device.

GRANDFRYER® 歌兰德炸炉系列旨在向专业级用户提供精准、节能、口感一致的烹饪解决方案。其配备的智能电脑控制板，其存储的每个菜单均由**FLEX SMART® COOKING**精准控制和多段烹饪智能控制，操作简单，专业级出品品质，口感一致，不因操作者差异而影响出品。

GRANDFRYER® Series fryer provides precise control, energy saving and consistency of cooking result for commercial kitchen. It is equipped with intelligent control panel, every stage of a menu is perfectly controlled by **FLEX Smart® Cooking system**. It has user-friendly simple operation, professional outcomes, consistent food texture which is not affected by different operators.



FEATURES / 产品特点

- ◆ 超高的能效与生产能力
- ◆ 全不锈钢油缸与柜体，表面精细喷砂处理
- ◆ 多种油缸尺寸可供选择，满足您的运营需求
- ◆ 可翻转的带状加热管易于清洁
- ◆ 电脑板控制,多达24个菜单存储能力,任意调用
- ◆ 温度探头精度达到±1°C
- ◆ 温度范围:195°F(91°C)到385°F(196°C)
- ◆ 1-1/2"的泄油阀快速泄油,防止堵塞
- ◆ 配备高温保护开关、防倾斜开关、泄油阀开关
- ◆ 24V 弱电控制系统更加安全
- ◆ 冷油区防止食物碎屑碳化
- ◆ 9 寸调节脚及万向轮稳定可靠
- ◆ 免工具拆卸炸篮挂板，方便清洁
- ◆ 配置：2 个分槽炸篮
- ◆ 可选配IOT功能
- ◆ Super high energy efficiency and production capacity
- ◆ All stainless steel structure with beadblast finished surface, and food grade steel frypot
- ◆ Numerous size of frypot for options to match different product frying applications
- ◆ Swing-up heating element, cleaning is much more easier
- ◆ Up to 24 programmable menu items
- ◆ Durable and snap-action probe with high grade accuracy ±1°C
- ◆ Frying temperature range from 195°F (91°C) to 385°F (196°C)
- ◆ 1-1/2" drain valve
- ◆ Equipped with hi-limit switch, anti-tilt switch, drain valve switch
- ◆ Safe with 24V low current control system
- ◆ Wide frypot (s) with cool zone design, helping collect food debris and prevent it carbonized
- ◆ Furnished with 9" heavy duty legs in front and bearing wheel castors with brakes in rear
- ◆ Toolless removable hanger mounted on the back splash for baskets
- ◆ Twin size baskets
- ◆ Optional IOT function




免工具拆卸炸篮挂板，方便清洁
Toolless removable hanger mounted on the back splash for baskets




电脑板控制，多达 24 个菜单存储能力，任意调用
Computer board control, up to 24 menu storage capabilities, arbitrary call



整锅、分锅设计 Full vat or splitted vat design
滤油系统可选 Oil filtration system available for option

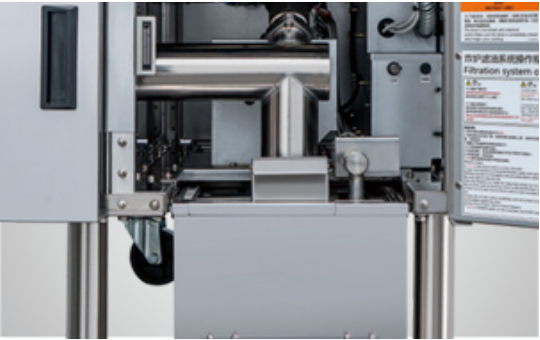

内置滤油系统
不但节约了使用空间，而且在保证烹炸食物保持高质量出品同时，还极大延长了油品的使用寿命，降低运营成本
The built-in oil filtering system not only saves the space, but also ensures that the fried food maintains high-quality outcome, while also greatly extending the service life of the oil and reducing operating costs

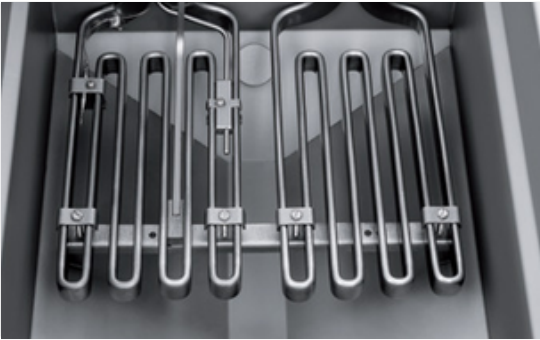

热效率极高且易清洁维护的带状加热管
能够快速回温，实现食物表面金黄酥脆且保持内部水分不流失的效果
Flat-bar heating element transfers heat more efficiently. With snap-action probe, heating element(s) heats up rapidly when it detects a change in the load and/or a drop in temperature, which helps to return to proper temperature faster
To achieve the effect that the surface of the food is golden and crispy and keep the internal moisture not lost

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

产品规格表
MODEL TABLE



产品型号 Model	NTP14EF
名称 Name	单槽滤油电炸炉 Full Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355 × 420 × 120 (14"×16.5"×4.7")
包装尺寸 (mm) Packing SizeWxDxH	890 × 520 × 1300
容量 Capacity	30L (60LB)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	14kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	100
毛重 Gross Weight (kg)	120

产品型号 Model	NTP14ESF
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (7.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/分槽
包装尺寸 (mm) Packing SizeWxDxH	890 × 520 × 1300
容量 Capacity	15L x2 (30L x 2)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	7kW x2
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12 /槽x2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	106
毛重 Gross Weight (kg)	126

产品型号 Model	NTP184EF
名称 Name	单槽滤油电炸炉 Full Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	507 × 797 × 1143 (20"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450 × 420 × 120(17.7"×16.5"×4.7")
包装尺寸 (mm) Packing SizeWxDxH	900 × 593 × 1300
容量 Capacity	37.8L (75.6LB)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	17kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	105
毛重 Gross Weight (kg)	132

产品型号 Model	NTP14-2LSEF
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/ 分槽 355 × 420 × 120 (14"×16.5"×4.7")/全槽
包装尺寸 (mm) Packing SizeWxDxH	980 × 910 × 1300
容量 Capacity	15L×2+30L (30LB×2+60LB)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	28kW (7+7+14) kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12/ 槽 ×2+24/ 槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	176
毛重 Gross Weight (kg)	206

产品型号 Model	NTP7-3EF
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	653 × 797 × 1143 (25.7"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/分槽
包装尺寸 (mm) Packing SizeWxDxH	765 × 910×1 300
容量 Capacity	15L×3 (30LB×3)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	7kW x3
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	8/ 槽 ×3
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	143
毛重 Gross Weight (kg)	175

产品型号 Model	NTP7-4EF
名称 Name	四槽滤油电炸炉 Four Vat Electric Fryer with Filtration System
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/分槽
包装尺寸 (mm) Packing SizeWxDxH	980 × 910 × 1300
容量 Capacity	15L×4 (30LB×4)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	7kW x4
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	12/ 槽 ×4
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	188
毛重 Gross Weight (kg)	230



产品型号 Model	N T P14E
名称 Name	单槽电炸炉 Full Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355 × 420 × 120 (14"×16.5"×4.7")
包装尺寸 (mm) Packing SizeWxDxH	890 × 520 × 1092
容量 Capacity	30L (60LB)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	14kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	-
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	82
毛重 Gross Weight (kg)	102

产品型号 Model	NTP14ES
名称 Name	双槽电炸炉 Dual Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	434 × 797 × 1143 (17.1"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	177 × 420 × 120 (7"×16.5"×4.7")/分槽
包装尺寸 (mm) Packing SizeWxDxH	890 × 520 × 1092
容量 Capacity	15L×2 (30LB×2)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	7kW*2
控制方式 CTL	电脑板computer
预存菜单 Menu No.	12/槽× 2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	-
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	85
毛重 Gross Weight (kg)	105

产品型号 Model	NTP184E
名称 Name	单槽电炸炉 Full Vat Electric Fryer
产品尺寸 (mm) Product Size WxDxH	507 × 797 × 1143 (20"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450 × 420 × 120 (17.7"×16.5"×4.7")
包装尺寸 (mm) Packing SizeWxDxH	900 × 593 × 1300
容量 Capacity	37.8L (75.6LB)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	17kW
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/槽
防水等级 IP Rating	IPX4
滤油系统 Filtration System	-
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	84
毛重 Gross Weight (kg)	110

产品型号 Model	NTP14-2EF
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	870 × 797 × 1143 (34.3"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	355×420×120 (14"×16.5"×4.7")/全槽
包装尺寸 (mm) Packing SizeWxDxH	980 × 910 × 1300
容量 Capacity	30L×2 (60LB×2)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	28kW (14kW × 2)
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	168
毛重 Gross Weight (kg)	198

产品型号 Model	N T P18 4-2E F
名称 Name	双槽滤油电炸炉 Dual Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	1014 × 797 × 1143 (39.9"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450×420×120 (17.7"×16.5"×4.7")/全槽
包装尺寸 (mm) Packing SizeWxDxH	1120 × 910 × 1300
容量 Capacity	37.8L×2 (75.6LB×2)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	17kW × 2
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×2
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	175
毛重 Gross Weight (kg)	208

产品型号 Model	N T P18 4-3E F
名称 Name	三槽滤油电炸炉 Three Vat Electric Fryer with Filtration system
产品尺寸 (mm) Product Size WxDxH	1521 × 797 × 1143 (59.9"×31.4"×45")
烹饪区域 (mm) Cooking Area WxDxH	450×420×120 (17.7"×16.5"×4.7")/全槽
包装尺寸 (mm) Packing SizeWxDxH	1625 × 910 × 1300
容量 Capacity	37.8L×3 (75.6LB×3)
电压/频率 Voltage & Frequency	380~415V 3N~, 220~240V 3~, 50/60Hz
额定功率 Rated Power	17kW × 3
控制方式 CTL	电脑板 computer
预存菜单 Menu No.	24/ 槽 ×3
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220~240V~, 50/60Hz, 250W
升降系统选装 Optional Lifting System	可选 Optional
净重 Net Weight (kg)	245
毛重 Gross Weight (kg)	288

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



GAS FRYER

单槽燃气炸炉

GRANDFRYER®

FEATURES / 产品特点

- ◆ 全不锈钢油缸，表面精细喷砂处理

◆ 内置滤油系统

◆ 清洁模式、融油模式

◆ 电脑板智能控制

◆ 温度探头精度达到 ±1℃

◆ 温度范围：195 °F (91℃) 到 385 °F (196℃)

◆ 1-1/2"的泄油阀快速泄油，防止堵塞

◆ 配备高温保护开关、泄油阀开关

◆ 24V 弱电控制系统更加安全

◆ 深冷油区防止食物碎屑碳化

◆ 9"调节脚及万向轮稳定安全

◆ 可拆卸清洗的炸篮挂板，无需任何工具

◆ 配置：2 个分槽炸篮

◆ 可选配IOT功能
- ◆ All stainless steel structure with fine sand blasting surface, and food grade steel oil tank

◆ Built in oil filter system

◆ Clean mode & oil meltdown mode

◆ Intelligent computer controller

◆ Temperature probe accuracy ±1°C

◆ Temperature range: 195°F to 385°F (91°C~196°C)

◆ 1-1/2" oil drain valve

◆ Hi-limit switch, drain valve switch

◆ 24V control system is more secure

◆ Cool zone design, help to collect food debris and prevent it carbonized

◆ 9" adjustable legs & universal castor wheels

◆ Toolless removable basket hanger is easy for cleaning

◆ Twin size baskets

◆ Optional IOT function



产品型号 Model	NTP14GF
产品尺寸 (mm)	434×800×1177 (17.1"×31.5"×46.3")
Product Size WxDxH	
烹饪区域 (mm)	355×357×100 (14"×14.1"×3.9")
Cooking Area. WxDxH	
包装尺寸 (mm)	530×900×1300
Packing SizeWxDxH	
容量 Capacity (Liter)	24L(48LB)
电压 Voltage	220-240V~,50Hz
额定功率 Rated Power (kW)	70,000BTUs
控制方式 CTL	可选 GF001 / CTT / Optional GF001, CTT
预存菜单 Menu	GF001 有 24 个、CTT 有 4 个 24 items for GF001, 4 items for CTT
防水等级 IP Rating	IPX4
滤油系统 Filtration System	220-240V ~,50/60HZ 250W
净重 Net Weight (kg)	99
毛重 Gross Weight (kg)	118
升降系统选装 Optional lifting system	可选Optional

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



ELECTRIC FRYER

经济型单槽电炸炉

GRANDFRYER®

FEATURES / 产品特点

- ◆ 超高的能效与生产能力

◆ 全不锈钢油缸，表面精细喷砂处理

◆ 烹饪区域：14.9"×14.3"×3.2" (380x363x80mm)

◆ 带状加热管

◆ 电子温控器

◆ 温度探头精度达到±1℃

◆ 温度范围：150 (65.6℃)~375华氏度(191℃)

◆ 1-1/2"的泄油阀快速泄油，防止堵塞

◆ 配备高温保护开关、泄油阀开关

◆ 冷油区防止食物碎屑碳化

◆ 6"调节脚稳定可靠（可选万向轮）

◆可拆卸清洗的炸篮挂板，无需任何工具

◆炸篮的选择: 2个分槽炸篮 或 1个全槽炸篮
- ◆ Super high energy efficiency and production capacity

◆ All stainless steel structure with bead blast finished surface

◆ Large cooking area 14.9"x14.3"x3.2" (380x363x80mm)

◆ Flat-bar heating element, heat transfers more efficiently

◆ Electronic thermostat

◆ Temperature probe accuracy reaches ±1°C

◆ Temperature range from 150°F-375°F (65.6°C~191°C)

◆ 1-1/2" drain valve

◆ Equipped with hi-limit switch, drain valve switch

◆ Wide frypot with cool zone, to prevent carbonization

◆ 6" adjustable heavy duty legs(bearing wheel castors are available for option)

◆ Toolless removable hanger mounted on the backsplash for baskets

◆ Twin size baskets or one full size basket are available for option



产品型号 Model	NTG14E
产品尺寸 (mm)	434×713×1006 (17.1"×28.1"×39.6")
Product Size WxDxH	
烹饪区域 (mm)	380×363×80 (15"×14.3"×3.1")
Cooking Area. WxDxH	
包装尺寸 (mm)	530×810×1130
Packing SizeWxDxH	
容量 Capacity (Liter)	21L (42LB)
电压 Voltage	240V 3~, 415V 3N, 50/60Hz
额定功率 Rated Power	14kW
控制方式 CTL	电子温控器 Solid-state Control
防水等级 IP Rating	IPX
净重 Net Weight (kg)	4 49
毛重 Gross Weight (kg)	64

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



COUNTERTOP FRYER

单双槽台上式炸炉

GRANDFRYER®
FEATURES / 产品特点

- ◆ 全不锈钢结构
- ◆ 一体拉伸油缸，冷油区设计
- ◆ 可编程电脑板，可预存4个菜单
- ◆ RTD 感温探头
- ◆ 低功率密度带状发热管，热传导更加均匀快捷，寿命更加长
- ◆ 控温范围：85~385° F（29~196° C）
- ◆ 1 英寸放油阀
- ◆ 高温保护开关
- ◆ 防倾斜开关
- ◆ 发热管可翻转清洗
- ◆ 烹饪区域：257*340mm
- ◆ 油量：10L/槽
- ◆ 烹饪完毕蜂鸣提醒
- ◆ 标配炸篮1个/槽

- ◆ Stainless steel construction
- ◆ One-piece deep-drawn frypot, food hygiene design with cold zone
- ◆ Programmable computer with a max. of 4 menu items
- ◆ RTD temperature probe
- ◆ Flat-bar heating element, low watt density and providing even heat distribution and longer service life
- ◆ Swing-up heating element makes cleaning a snap
- ◆ Cooking temperature ranges from 85~385°F（29~196°C）
- ◆ 1 inch drain valve
- ◆ Oil capacity: 10L per vat
- ◆ Hi-limit switch, anti-tilt switch
- ◆ Cooking area 257*340mm
- ◆ Buzz when cooking done
- ◆ One frying basket per vat



设备名称 Name	NTT10E	NTT10-2E
产品型号 Model	单槽台上式炸炉 Single Vat Countertop Fryer	双槽台上式炸炉 Dual Vat Countertop Fryer
产品尺寸 (mm) Product Size WxDxH	350×700×510 (13.8"×27.6"×20.1")	680×700×510 (26.8"×27.6"×20.1")
烹饪区域 (mm) Cooking Area WxDxH	257×340×60 (10.1"×13.4"×2.4")	257×340×60 (10.1"×13.4"×2.4") / 槽 (vat)
包装尺寸 (mm) Packing SizeWxDxH	384×780×578	714×780×578
容量 Capacity (Liter)	10L (20LB)	10L×2 (20LB×2)
电压Voltage	380V 3N~50Hz 400V 3N~50Hz 240V 3N~60Hz	380V 3N~50Hz 400V 3N~50Hz 240V 3N~60Hz
功率 Power	5.5kW 6kW 6.5kW	11kW 12kW 13kW
控制方式 CTL	电脑板 Computer	电脑板 Computer
预存菜单 Menu No.	4/ 槽	4/槽x2
防水等级 IP Rating	IPX3	IPX3
净重 Net Weight (kg)	22.5	38.5
毛重 Gross Weight (kg)	25	44



AUTO-LIFT COUNTERTOP FRYER

台上式升降炸炉

GRANDFRYER®
FEATURES / 产品特点

- ◆ 全不锈钢结构
- ◆ 油缸可拆卸，便于清洁
- ◆ 自动升降功能，一键操作，全自动完成食物的油炸烹饪
- ◆ 可编程电脑板，3段烹饪，9个预存菜单+1个临时餐单
- ◆ 重载、超重载烹饪控制
- ◆ 控温范围：76~391°F（25~200°C）
- ◆ 高温保护开关
- ◆ 防倾斜开关
- ◆ 发热管可翻转清洗
- ◆ 烹饪完毕蜂鸣提醒
- ◆ 标配炸篮1个/槽
- ◆ 220V 16A, 配带插头电源线2米

- ◆ Stainless steel construction
- ◆ Removable oil vat for easy cleaning
- ◆ Basket automatically lift-up when cooking done
- ◆ 9 menu key pads (+1 temporary menu), 3 programmable stages for each cooking cycle
- ◆ Automatically extend cooking time when adding extract portions
- ◆ Temperature range: 76~391°F (25~200°C)
- ◆ Hi-Limit switch
- ◆ Anti-Tilt switch
- ◆ Swing-up heating element makes cleaning a snap
- ◆ Buzz when cooking done
- ◆ Standard configuration: 1 basket/vat
- ◆ 220V 16A with plug power cord 2 meters



设备名称 Name	NTT8E
产品型号 Model	单槽台上式炸炉 Single Vat Countertop Fryer
产品尺寸 (mm) Product Size WxDxH	265×575×425(10.4"×22.6"×16.7")
烹饪区域 (mm) Cooking Area WxDxH	240×300×100 (9.4"×11.8"×3.9")
包装尺寸 (mm) Packing SizeWxDxH	3 45×6 45×555
容量 Capacity (Liter)	5L (10LB)
电压 Voltage	220-240V ~, 50/60Hz
功率 Power (kW)	3.2
预存菜单 Menu No.	9/槽
防水等级 IP Rating	IPX3
净重 Net Weight (kg)	17
毛重 Gross Weight (kg)	19.5

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



履带式电热披萨炉

GRANDOVENR series



*产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。

* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

NTE-1620-T是GRANDOVEN® 电力履带式烘炉系列产品之一，紧凑的设计令它非常适合厨房不大的连锁店或者外带类快捷服务店使用，同时因它可层叠式的设计（可堆叠2层），令用户在节省空间同时满足用餐高峰时段的出品需求。

NTE-1620-T is one of GRANDOVEN® series electric baking oven. It is ideally suited for express-style or chain restaurants where smaller ovens are required yet provide high baking output as its self-contained, conveyorized and stackable up to two (2) units high.

可烹饪菜单COOKING MENU

各种披萨 / 鸡翅 / 焗饭等等
Pizza, Chicken wings, Baked Rice, etc.



智能互联允许通过智能设备实时连接访问您的设备。
Smart connect allows real-time access to your device via any smart device.



NTE-1620-T



NTE-2090



NTE-2060



NTE-32101-T



ELECTRIC CONVEYOR OVEN

履带式电热披萨炉

GRANDOVEN®
FEATURES / 产品特点

- ◆ 热风冲击加热技术, 通过热风喷流技术和环流热风循环作用于食物表面, 使得 食物加热更加迅速, 口感更加松脆
 - ◆ 可堆叠摆放, 节省空间, 同时满足高峰时段出品需求
 - ◆ PID 算法微处理器, 精确控制烘焙时间和传送带速度
 - ◆ 烘焙内胆长度1028mm, 传送链宽813mm, 长1936mm
 - ◆ 全不锈钢结构, 更符合食品卫生要求
 - ◆ 正面钢化玻璃视窗, 不锈钢把手, 清洁更加容易
 - ◆ 落地式设计, 5 寸带刹重型脚轮
 - ◆ 免工具拆卸链网
 - ◆ 传送带正反转功能
 - ◆ 5 寸触摸屏
- ◆ Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
 - ◆ Can be stacked to save space while meeting production requirements during peak hours
 - ◆ With PID Microprocessor controller, baking temperature and time are always under perfect control
 - ◆ 1028mm long cooking chamber with 813mm belt width and 1936mm Length
 - ◆ All stainless steel structure, comply with food hygiene requirements
 - ◆ Floor-type design with 5" heavy duty castors, all with brakes
 - ◆ Toolless-open access panels
 - ◆ Reversible conveyor direction
 - ◆ 5 inch touch screen



操作简便, 控制精准
Simply and easy operation



正面钢化玻璃视窗, 不锈钢把手, 清洁更加容易
All stainless steel structure, comply with food hygiene requirements



落地式设计, 5 寸带刹重型脚轮
Floor-type design with 5" heavy duty castors, all with brakes

* 产品规格及设计如有变更, 恕不另行通知; 产品外观以实物为准, 以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



优化风道, 高效节能


High Efficient and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶, 集轴流和环流属性于一身, 使得高温气流具备直流冲击力和环流的均匀性, 热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.



NTE-32101-T

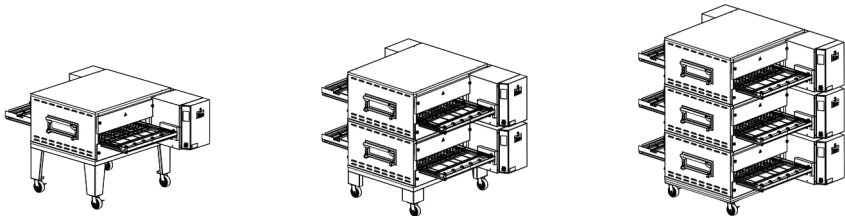

产品型号 Model		NTE-32101-T
宽Width (mm)		2048
深Depth (mm)		1410
总高 (mm)	单层 Single Stack	1186
Overall Height	双层 Double Stack	1542
	三层 Tri-Stack	1969
包装尺寸 Packing Size W×D×H (mm)		2160×1580×824
最高温度 Max Operation Temp		300°C
功率 Power	每层 (Per Deck)	27kW
时间调节 Bake Time Range		1 ~ 14 分钟 (minutes)
电压 Volts		380V 3N~
频率 Hz		50Hz
防水等级 IP Rating		IPX3
净重 Net Weight (kg)		419
毛重 Gross Weight (kg)		498



ELECTRIC CONVEYOR OVEN

履带式电热披萨炉

GRANDOVEN®
FEATURES / 产品特点

- ◆ 热风冲击加热技术, 通过热风喷流技术和环流热风循环作用于食物表面, 使得食物加热更加迅速, 口感更加松脆
- ◆ 正面钢化玻璃视窗, 不锈钢把手, 清洁更加容易
- ◆ 挡风板高度可调, 从而降低热量损失, 减少食材大小的局限性
- ◆ 最高可堆叠 3 层, 节省空间, 同时满足更大量的出品需求
- ◆ PID 算法微处理器, 精准控制烘焙温度和传送带速度, 烘焙品质极佳
- ◆ 全不锈钢结构, 更符合食品卫生要求
- ◆ 落地式设计, 5 寸带刹重型脚轮
- ◆ 免工具拆卸面板
- ◆ 传送带正反转功能
- ◆ Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
- ◆ Front-access window, robust stainless steel handle
- ◆ The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
- ◆ Stackable up to 3 units high
- ◆ With PID Microprocessor controller, baking temperature and time are always under perfect control
- ◆ All stainless steel structure, comply with food hygiene requirements
- ◆ Floor-type design with 5" heavy duty castors, all with brakes
- ◆ Toolless-open access panels
- ◆ Reversible conveyor direction



上下热风冲击加热技术
Hot Air Impingement Technology

采用进口耐高温特殊混流涡轮风叶, 集轴流和环流属性于一身, 使得高温气流具备直流冲击力和环流的均匀性, 热效率非常高。
The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.



NTE-2060



NTE-2060-T



NTE-2090



NTE-2090-T

产品型号 Model	NTE-2060	NTE-2060-T	NTE-2090	NTE-2090-T
控制方式 CTL	CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5" Touch Screen CTL)	CTT+ 按键型 (Digital CTL)	5 寸触摸屏 (5" Touch Screen CTL)
宽 Width (mm)	1173 (含两边挡板:1599 with extension sheet plates)	1173 (含两边挡板:1599 with extension sheet plates)	1533 (含两边挡板:1927 with extension sheet plates)	1533 (含两边挡板:1927 with extension sheet plates)
深 Depth (mm)	1078	1078	1124	1124
总高	1061	1061	1125	1125
Overall Height (mm)	双层 Double Stack 1528	1528	1592	1592
	三层 Tri-Stack 1760	1760	1759	1759
包装尺寸 Packing SizeW×D×H (mm)	1250×1180×650	1250×1180×650	1670×1230×780	1670×1230×780
烘焙内胆长度 long Cooking Chamber (mm)	610	610	910	910
传送链宽 Belt Width (mm)	530	530	530	530
最高温度 Max. Operation Temp.	300°C	300°C	300°C	300°C
功率 Power / 每层 (Per Deck)	12.3kW	12.3kW	17kW	17kW
时间调节 Bake Time Range	2~14 分钟(minutes)	2~14 分钟(minutes)	1~14 分钟(minutes)	1~14 分钟(minutes)
电压 Volts	380~415V 3N~, 220~240V 3N~	380~415V 3N~, 220~240V 3N~	380~415V 3N~, 220~240V 3N~	380~415V 3N~, 220~240V 3N~
频率Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
防水等级IP Rating	IPX3	IPX3	IPX3	IPX3
净重Net Weight (kg)	170	170	260	260
毛重Gross Weight (kg)	202	202	306	306

* 产品规格及设计如有变更, 恕不另行通知; 产品外观以实物为准, 以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



ELECTRIC CONVEYOR OVEN

履带式电热披萨炉

GRANDOVEN®
FEATURES / 产品特点

- ◆ 热风冲击加热技术。通过热风喷流技术和环流热风循环作用于食物表面，使得食物加热更加迅速，口感更加松脆
 - ◆ 采用特殊混流涡轮风轮，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，烘焙效果更加出色
 - ◆ 挡风板高度可调，从而降低热量损失，减少食材大小的局限性
 - ◆ 可堆叠摆放，节省空间，同时满足高峰时段出品需求
 - ◆ OPD 算法微处理器，精确控制烘焙时间和传送带速度，温控更加精准烘焙
- ◆ Hot air impingement. The hot air jet technology and hot air circulation act on the food surface, which makes the food heated more quickly and the taste is more crisp
 - ◆ The special mixed-flow turbine wind wheel is used to integrate the properties of axial flow and circulation, so that the high-temperature airflow has DC impact and uniformity of circulation, and the baking effect is even better
 - ◆ The height of the windshield is adjustable to reduce heat loss and reduce the limitation of the size of the food
 - ◆ Can be stacked to save space while meeting production requirements during peak hours
- ◆ 全不锈钢结构，更符合食品卫生要求
 - ◆ 内置催化剂具备除臭，抗污染功能
 - ◆ 传送带尺寸可选：32 寸 /37 寸 /50 寸
 - ◆ 标配 4 寸重力脚
 - ◆ 免工具拆卸链网
 - ◆ 传送带正反转功能
 - ◆ 5 寸触摸屏
 - ◆ 座台式设计
- ◆ With OPD Microprocessor controller, baking temperature and time are always under perfect control
 - ◆ All stainless steel structure, comply with food hygiene requirements
 - ◆ Conveyor belt size optional: 32 inches / 37 inches / 50 inches
 - ◆ Furnished with 4" heavy duty legs
 - ◆ Toolless-open access panels
 - ◆ Reversible conveyor direction
 - ◆ 5 inch touch screen
 - ◆ Countertop design



全不锈钢结构,更符合食品卫生要求
All stainless steel structure, comply with food hygiene requirements



操作简便，控制精准
Simply and easy operation.



优化风道，高效节能
High Efficient and Low Energy Consumption

采用进口耐高温特殊混流涡轮风叶，集轴流和环流属性于一身，使得高温气流具备直流冲击力和环流的均匀性，热效率非常高。

The imported high-temperature-resistant special mixed-flow turbine blades combine the properties of axial flow and circulation, so that the high-temperature airflow has DC impact force and uniformity of circulation, and the thermal efficiency is very high.



NTE-1620-V



NTE-1620-T

产品型号 Model	NTE-1620-V	NTE-1620-T
控制方式	CTT+按键型(Digital CTL)	5 寸触摸屏(5" Touch Screen CTL)
CTL 宽	1000 (含两边挡板:1400 with extention sheet plates)	1032 (含两边挡板:1400 with extention sheet plates)
Width (mm)	826	826
总高 (mm)	467	467
Depth (mm)		467
Overall Height (mm)	837	838
包装尺寸 Packing SizeW×D×H (mm)	1100×920×620	1100×950×620
烘焙内胆长度 long Cooking Chamber (mm)	518	518
传送链宽 Belt Width (mm)	436	436
最高温度 Max. Operation Temp.	300°C	300°C
功率 Power / 每层 (Per Deck)	6.7kW	6.7kW
时间调节 Bake Time Range	1'25"~11 分钟(minutes)	1'25"~11 分钟(minutes)
电压 Volts	380~415V 3N~, 220~240V ~	380~415V 3N~, 220~240V ~
频率 Hz	50/60Hz	50/60Hz
防水等级 IP Rating	IPX3	IPX3
净重 Net Weight (kg)	85	85
毛重 Gross Weight (kg)	107	107

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



CLAMSHELL GRILL LITE

单双头双面煎扒炉

双面煎扒炉专为烹饪牛肉饼，鸡肉三明治，帕尼尼以及卷饼等食物而设计。
Clamshell Grill Lite is designed to cook beef patties, chicken, sandwiches, panini and wraps etc.

GRAND® SERIES

FEATURES / 产品特点

- ◆ 简洁的设计，上下煎板同时烹饪两面，将烹饪时间减少多达 50%

◆ 上煎板铰链配有阻尼设计，可适应不同厚度的产品，并可自动定位为 45° / 85°

◆ 上煎板和下煎板可以独立控制温度，工作温度范围从 30° C 至 288° C

◆ 煎板有侧防溅保护装置，防止油脂溢出及过热安全保护，便于操作和安全保护

◆ 可拆卸油脂盒，便于清洁

◆
- ◆ Compact and portable design. The upper and lower grill plates cooking both sides simultaneously, reducing cook time by up to 50%

◆ Upper plate hinge equipped with damping design to accommodate various of product thickness, and can be positioned at 45° / 85° automatically

◆ Upper plate and lower platen can be on/off controlled independently with operating temperature from 30°C up to 288°C

◆ Side splash guard on lower platen panel to protect against grease spills / upper heat safety guard in place for easy operation and safety protection

◆ Removable grease box foreasy cleanup



NTCS1F



NTCS2F

产品型号 Model	NTCS1F	NTCS2F
产品尺寸 (mm) Dimension WxDxH2/H1	354×660×437 (13.9"×25.9"×17.2")	704×660×437 (27.7"×26"×17.2")
烹饪区域 (mm) Cooking area WxDxH	300×400 (11.8"×15.7")	300×400 (11.8"×15.7") (单侧烹饪区域)
包装尺寸 (mm) Packing SizeWxDxH	526×820×625	876×820×625
电压频率 Voltage & Frequency	220V~ 380V 3N~ 50/60Hz	380V 3N~ 50Hz
功率 Power (kW)	5.25	5.25+5.25
扒板厚度 (mm) Grill Plate Thickness	上扒板(Upper griddle) 20 下扒板(Lower griddle) 18	上扒板(Upper griddle) 20 下扒板(Lower griddle)18
净重 Net Weight (kg)	54	115
毛重 Gross Weight (kg)	57	120

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



COUNTERTOP HEAVY-DUTY GRIDDLE

24 寸 /36 寸台式扒炉

GRANDOVEN® FEATURES / 产品特点

- ◆ 从室温加热至260°C只需19分钟
- ◆ 厚度达到 24mm 的重型扒板
- ◆ 光亮、耐磨的镀铬表面
- ◆ 镀铬表面减少超过 20% 的清洁时间和清洁剂
- ◆ 插进扒板的温度探针确保控温精准(烹饪区域±5°C)
- ◆ 3.8"英寸高的围边防止油脂飞溅
- ◆ 热效率极高的带状电热管
- ◆ 每12英寸独立控温
- ◆ 精准的温度控制器（探针精度±1°C）
- ◆ 台面带有凹陷的油脂收集口
- ◆ 易于清洗的集油槽
- ◆ 液晶显示器
- ◆ Heat up rapidly. Only take 19 minutes to reach temperature 260°C from ambient 25°C
- ◆ Up to 24mm thickness steel griddle plate with chrome finished surface
- ◆ Chrome finished griddle plate makes cleaning very easy and save cleaner by 20%
- ◆ 3.8inch splash plate
- ◆ The temperature probe inserted into the grill plate ensures accurate temperature control (cooking area ±5°C)
- ◆ Flat-bar type heating element. Heat transfers more efficiently
- ◆ Independent temperature control every 12 inches
- ◆ Accurate temperature controller (probe accuracy ±1°C)
- ◆ Recessed grease collection port on the top
- ◆ Removable oil tray at bottom
- ◆ LCD display



NTL24



NTL36

产品型号 Model	NTL24	NTL36
产品尺寸 (mm) Dimension WxDxH2/H1	614x747x443	919x747x443
烹饪区域 (mm) Cooking area WxDxH	610x610	915x610
包装尺寸 (mm) Packing SizeWxDxH	860x730x590	1030x880x580
电压频率 Voltage & Frequency	380-415V 3N~ 240V 3~, 50/60Hz	380-415V 3N~ 240V 3~, 50/60Hz
功率 Power (kW)	8kW	12kW
扒板厚度 (mm) Grill Plate Thickness	24	24
净重 Net Weight (kg)	108	156
毛重 Gross Weight (kg)	132	185

*坑扒可选Customized grill plate is available for option



COUNTERTOP ELECTRIC DUMPLING GRIDDLE

单双头电热煎饺机

GRANDOVEN® FEATURES / 产品特点

- ◆ 镀硬铬扒板，保证高效热传递同时抗腐蚀更出色
- ◆ 上盖简洁设计，随停任意位置，清洁更方便
- ◆ 控制面板可编程设置，满足更多烹饪需求，可煎饺及扒类食材
- ◆ 高效低密度发热管，从室温 30° C 到 210° C 仅需 11 分钟
- ◆ 加水时间及注水量灵活设置
- ◆ Hard chrome plated grill plate to ensure efficient heat transfer and better corrosion resistance
- ◆ Simple design of the top cover, stopping at any position, more convenient to clean
- ◆ Editable settings on the control panel to meet more cooking needs, pan fried dumplings and steaks
- ◆ Flexible setting of water filling time and volume
- ◆ High-efficiency low-density heating tube, only 11 minutes from room temperature 30°C to 210°C



PYJ-01



PYJ-02

(()) 烹饪完毕蜂鸣及指示灯提醒
Buzzer and indicator light to remind after cooking

产品型号 Model	PYJ-01	PYJ-02
尺寸 Dimension (mm)	285 x 596 x 341	570 x 596 x 341
烹饪区尺寸 Maximum Cooking Quantity (mm)	317 x 204	317 x 204 x2
包装尺寸 Maximum Cooking Quantity (mm)	410 x 695 x 510	665 x 695 x 510
电压 / 频率 Voltage & Frequency Power	220-240V~, 50/60Hz 3kW	220-240V~, 50/60Hz 6kW
烹饪最大量 Maximum Cooking Quantity	28~33 个	28~33 个 x2
净重 Net Weight (kg)	27	52
毛重 Gross Weight (kg)	29.5	55

产品型号 Model	PYJ-01/02 出厂默认参数 Default	PY-01/02 参数设置范围 Range
预热温度 Pre-heating Temperature	210°C	50~250°C
烹饪时间 Cooking Time	5:40	00:30~30:00 (mm:ss)
烹饪温度 Cooking Temperature	205°C	50~250°C
注水时间 Water Feeding Time	00:10 (mm:ss)	00:01~10:00 (mm:ss)
注水量 Feeding Water Volume	250ML	0~950ML

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.



ELECTRIC AUTO-LIFT NOODLE COOKER
(2-TANK,6-BASKET)

电热双缸六头升降煮面炉

GRANDOVEN®
FEATURES / 产品特点

- ◆ 全不锈钢机身设计，外观简洁 台面上自动升降机构防水设计，升降电机使用寿命大为提升 前置按钮式升降开关，使用寿命优于拍打式，每个按键有 2 个菜单
- ◆ 多档功率档位开关，根据烹饪选择所需功率
- ◆ 配置快进水阀和慢补水阀，有溢水功能
- ◆ 电脑版智能精准温控时，具有保温功能，保温温度可调
- ◆ 具有超温保护功能和缺水提醒功能
- ◆ 独特的喷流式设计，高效节能
- ◆ 前脚后轮，方便搬运和设备安装调整



- ◆ Stainless steel body design, simple appearance
- ◆ Waterproof design of the automatic lifting structure on the table, greatly improving the service life of the lifting motor
- ◆ The service life of the lifting push button is longer than that of the flap type. Each button has two menus
- ◆ Multi-power gear switch, select the required power according to cooking
- ◆ Equipped with fast water inlet valve and slow water refill valve with overflow function
- ◆ Intelligent computer panel controls temperature and time precisely. It has the function of heat preservation and the heat preservation temperature is adjustable
- ◆ With over-temperature protection and water shortage reminder function
- ◆ Unique water jet design, high efficiency and energy saving
- ◆ The front feet and rear casters are convenient for moving around



产品型号 Model	NTG-6A
产品尺寸 Product Size W×D×H (mm)	600 x 800 x 1038
缸体尺寸 Cylinder Block Size (mm)	192 x 560 x 200
包装尺寸 Packing Size W×D×H (mm)	910 x 720 x 1200
容量 Capacity (Liter)	19L x 2
电压 / 频率 Voltage & Frequency	380~415V 3N~, 50/60Hz
额定功率 Rated Power (kW)	12.3kW
存菜单 Menu No.	12
防水等级 IP Rating	IPX4
净重 Net Weight (kg)	75
毛重 Gross Weight (kg)	83



ECONOMIC COMBI OVEN

简易蒸烤箱

(不带锅炉) (without boiler)

GRANDOVEN®
FEATURES / 产品特点

- ◆ 三种工作模式，蒸、烤、蒸烤混合，可满足多种烹饪需求
- ◆ 旋钮控制，支持手动模式和菜单模式，用户操作便捷
- ◆ 可储存 9 个菜单，最高可设置 3 段程序
- ◆ 涡轮热风循环，加热均匀，确保食品色泽如一
- ◆ 自带蒸汽喷雾，强大蒸汽，烹饪自如
- ◆ 耐高温氖气照明，显色指数高，易于观察菜品上色情况
- ◆ 双层钢化玻璃隔热门，高效隔热，避免烫伤
- ◆ 侧挂式手持水枪，清洗方便，省心省力



- ◆ Three operating modes: steam, bake, and steam-bake combination, catering to various cooking needs.
- ◆ Rotary knob control supports both manual and menu modes for user-friendly operation.
- ◆ Stores up to 9 menus with a maximum of 3 programmable cooking stages.
- ◆ Turbo hot air circulation ensures even heating for consistent food color and texture.
- ◆ Built-in steam spray delivers powerful steam for precise cooking.
- ◆ High-temperature-resistant neon lighting with high color rendering index for easy dish monitoring.
- ◆ Double-layer tempered glass door provides effective heat insulation and prevents burns.
- ◆ Side-mounted handheld spray gun for convenient and effortless cleaning.

产品型号 Model	NC0423S-B	NC0611S-B	NC1011S-B
名称 Name	四层电子版万能蒸烤箱 4-Layer Electronic Combi Oven	六层电子版万能蒸烤箱 6-Layer Electronic Combi Oven	十层电子版万能蒸烤箱 10-Layer Electronic Combi Oven
产品尺寸 (mm) Product Size WxDxH	660×658×716	880×876×943	880×876×1150
内腔规格 (mm) Chamber Size	370×460×380	440×670×508	440×670×735
包装尺寸 (mm) Packing SizeWxDxH	789×764×875	1014×974×1075	1014×974×1290
电压频率 Voltage & Frequency	380V 3N~ 50Hz	380V 3N~ 50Hz	380V 3N~ 50Hz
总功率 (kW) Rated Power	6.1kW	12.3kW	18.3kW
容量 Capacity	4×2/3GNP	6×1/1GNP	10×1/1GNP
控制器 Control	电子旋钮控制器	电子旋钮控制器	电子旋钮控制器
温度控制范围 Temperature range	Electronic knob controller 25~300℃	Electronic knob controller 25~300℃	Electronic knob controller 25~300℃
防水等级 IP Rating	IPX3	IPX3	IPX3
净重 Net Weight (kg)	60	153	157
毛重 Gross Weight (kg)	90	187	204
配置网架数 No. of Rack	选配 /Optional	选配 /Optional	选配 /Optional

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.

* 产品规格及设计如有变更，恕不另行通知；产品外观以实物为准，以上参数只供参考。
* Product specifications and design are subject to change without notice. The appearance of the product is subject to the actual product, and the above parameters are for reference only.