



26th
ANNIVERSARY




COMMERCIAL SERIES

2 0 2 5

COMMERCIAL SERIES



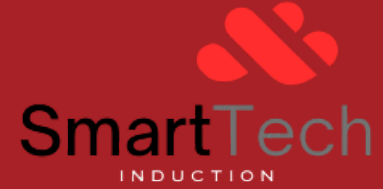

FULL RANGE CUSTOMIZABLE




**COMMERCIAL COOKTOP
SERIES**

P 011



**BUILT IN COOKTOP
SERIES**

P 071



**KEEPING WARM
COOKTOP
SERIES**

P 077



**INDUCTION DEEP FRYER
SERIES**

P 087



**CATERING TROLLEY
SERIES**

P 097




**INDUCTION CATERING
EQUIPMENT
SERIES**

P 101



**BUFFET STATION
SERIES**

P 209

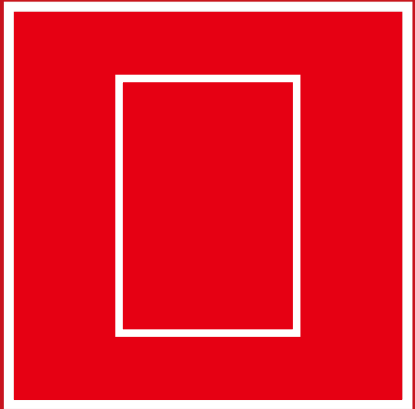

INDUCTION
CATERING
EQUIPMENT
SERIES



DOUBLE HOB INDUCTION STOVE


EW5/5G2-D-H9 **5000W*2**

DIMENSION: APPROX. 40 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

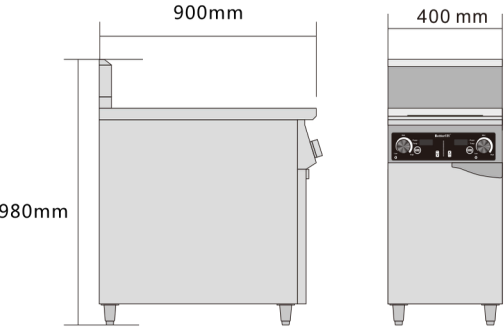

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



DOUBLE HOB INDUCTION STOVE


EW5/5G2-D-H7 5000W*2

DIMENSION: APPROX. 40 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

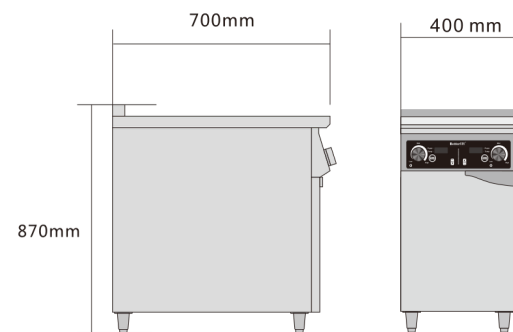

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



DOUBLE HOB INDUCTION STOVE

EW5/5G2-D-H7 PRO 5000W*2


DIMENSION: APPROX. 40 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TFT DISPLAY

STRUCTURAL DESIGN

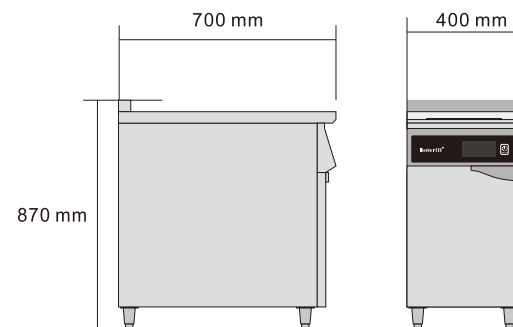

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



DOUBLE HOB INDUCTION STOVE

EW500N-H7-D-F 6000W


DIMENSION: APPROX. 40 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

WITH FLEX FUNCTION

STRUCTURAL DESIGN

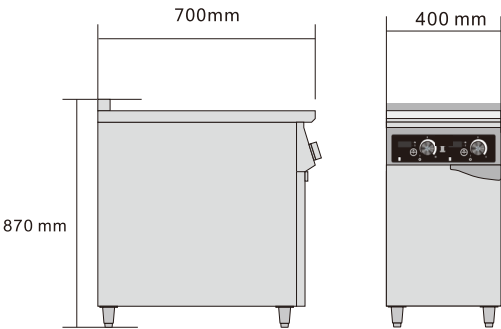

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



DOUBLE HOB INDUCTION STOVE

EW5/5T2-D-H9 5000W*2


DIMENSION: APPROX. 40 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180 MINS

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

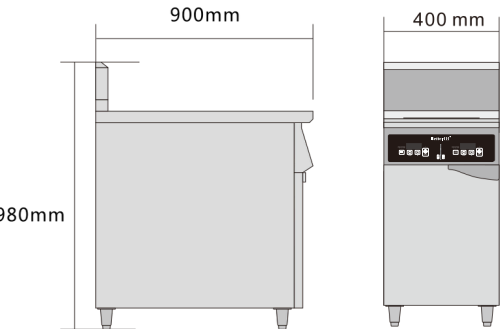

BETTER USP


-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



DOUBLE HOB INDUCTION STOVE

EW500N-H7-D-L **6000W**
DIMENSION: APPROX. 40 X 70 X 87 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0-180MINS
TEMP RANGE: 60°C-240°C
WITH FLEX FUNCTION

STRUCTURAL DESIGN

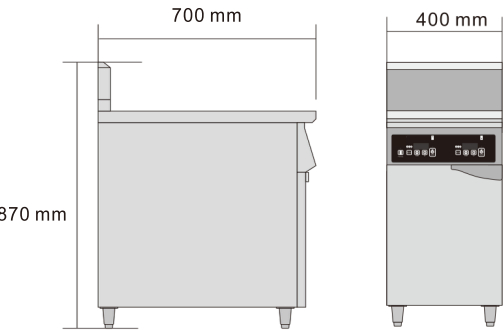

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5G4-H9-W1 **5000W*4**
DIMENSION: APPROX. 80 X 90 X 98 CM
VOLTAGE: 380-420V~50-60Hz
TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

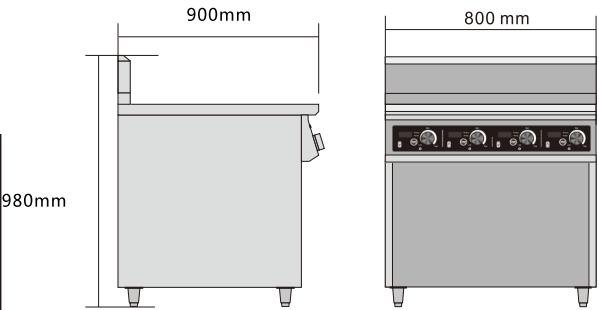

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5G4-D-H7-W1 5000W*4


DIMENSION: APPROX. 80 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C



STRUCTURAL DESIGN

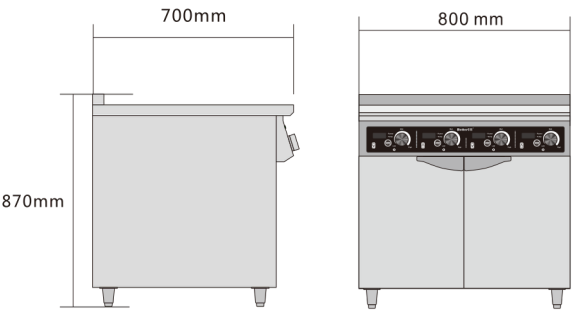

FOUR HOB INDUCTION STOVE

EW5/5T4-H9-W1 5000W*4

DIMENSION: APPROX. 80 X 90 X 98 CM


VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TEMP RANGE: 60°C-240°C



STRUCTURAL DESIGN

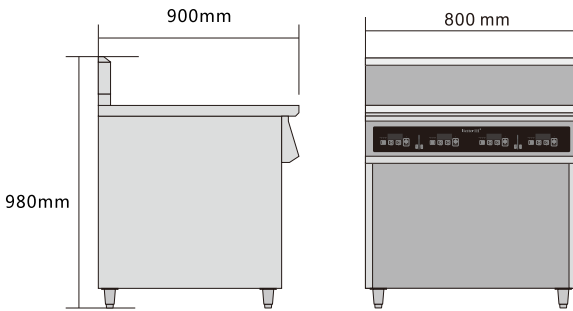

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION





FOUR HOB INDUCTION STOVE

EW3/3T4-D-H95-W4 3500W*4


DIMENSION: APPROX. 90 X 95 X 95 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

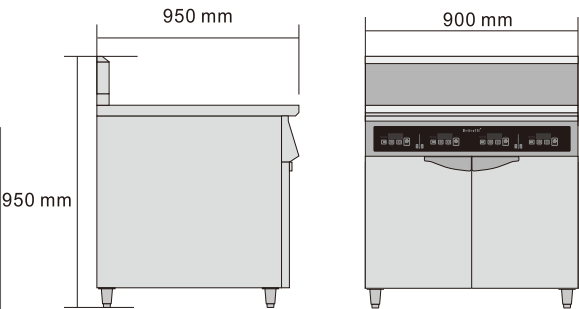

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE


EW5/5G4-D-H9-W2 5000W*4

DIMENSION: APPROX. 80 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

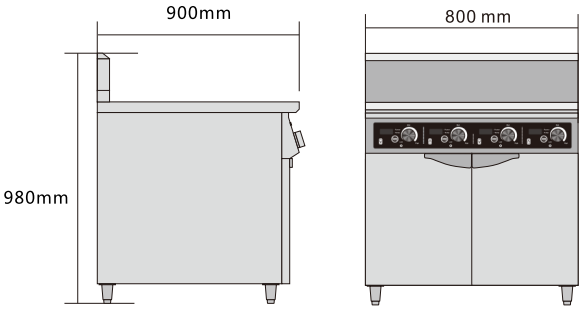

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION

FOUR HOB INDUCTION STOVE


EW5/5G4-D-H7-W2 5000W*4

DIMENSION: APPROX. 80 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

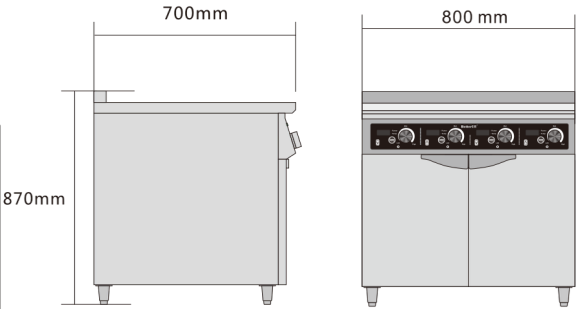

FOUR HOB INDUCTION STOVE

EW5/5G4-D-H7-W2 PRO 5000W*4


DIMENSION: APPROX. 80 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180 MINS

TFT DISPLAY

STRUCTURAL DESIGN

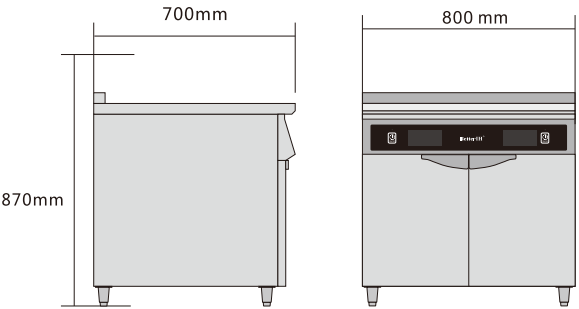

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL




OVERHEAT
PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5G4F-D-H7-W2 16000W(6000W+5000W*2)
DIMENSION: APPROX. 80 X 70 X 87 CM
VOLTAGE: 380-420V~50-60Hz
TEMP RANGE: 60°C-240°C
LEFT SIDE WITH FLEX FUNCTION

STRUCTURAL DESIGN

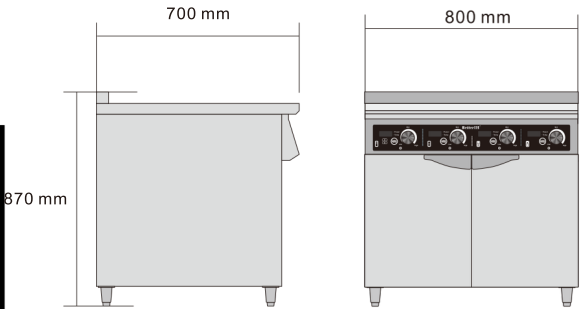

BETTER USP


- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5G4T-D-H7-W2 16000W(6000W+5000W*2)
DIMENSION: APPROX. 80 X 70 X 87 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0-180 MINS
TEMP RANGE: 60°C-240°C
LEFT SIDE WITH FLEX FUNCTION

STRUCTURAL DESIGN

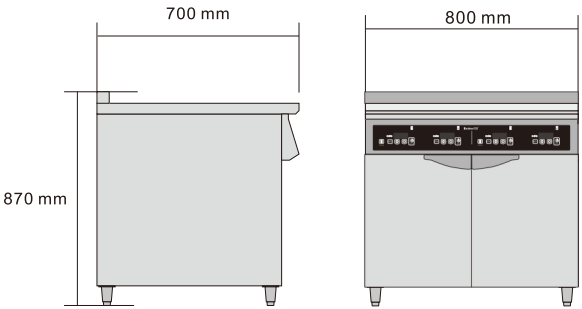

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5T4-H9-W2 5000W*4


DIMENSION: APPROX. 80 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

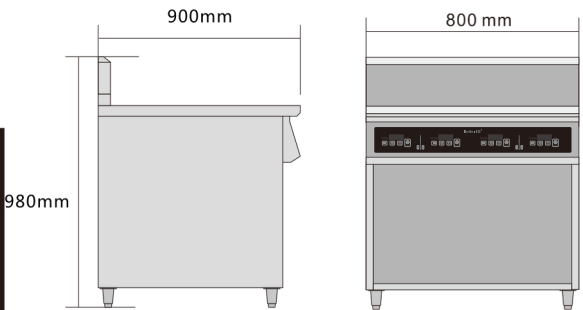

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  LED CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



SIX HOB INDUCTION STOVE

EW5/5G6-H7 PRO 5000W*6


DIMENSION: APPROX. 120 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TFT DISPLAY

STRUCTURAL DESIGN

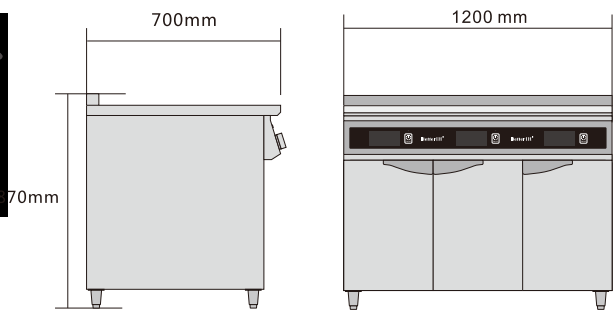

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  LED CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



SIX HOB INDUCTION STOVE


EW5/5G6-H9 5000W*6

DIMENSION: APPROX.120 X90X 98CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

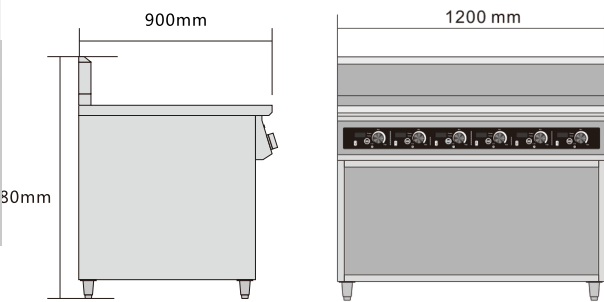

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



SIX HOB INDUCTION STOVE


EW5/5G6-H7 5000W*6

DIMENSION: APPROX.120 X70X 87CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

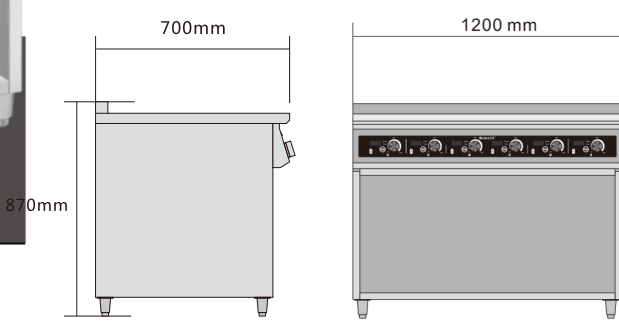

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



SIX HOB INDUCTION STOVE

EW5/5T6-H9 5000W*6


DIMENSION: APPROX. 120 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180 MINS

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

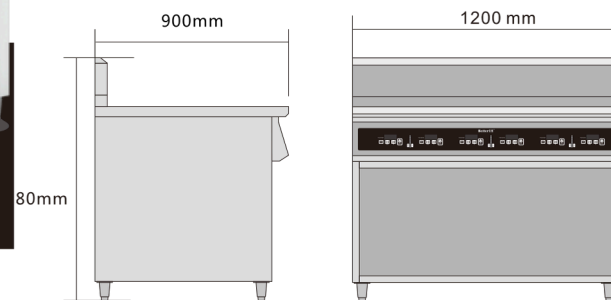

BETTER USP



BETTER-CRAFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



SIX HOB INDUCTION STOVE

EW5/5G6T-H7 5000W*6


DIMENSION: APPROX. 120 X 70 X 87 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180 MINS

TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

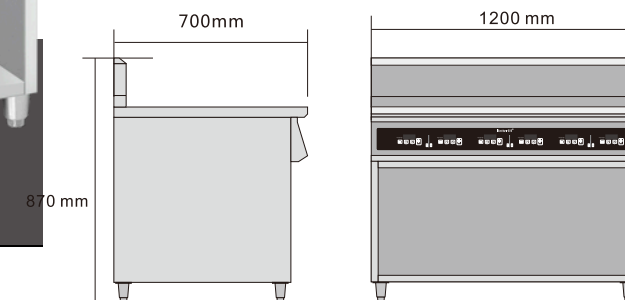

BETTER USP



BETTER-CRAFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION

SIX HOB INDUCTION STOVE

EW5/5G6F-D-H7-W2 26000W(6000W+5000W*4)

DIMENSION: APPROX.120 X70 X 87 CM


VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 60°C-240°C

LEFT SIDE WITH FLEX FUNCTION



STRUCTURAL DESIGN

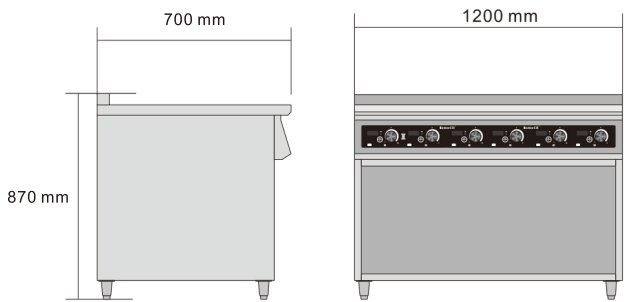

BETTER USP



SIX HOB INDUCTION STOVE

EW5/5G6T-D-H7-W2 26000W(6000W+5000W*4)

DIMENSION: APPROX.120 X70 X 87 CM

VOLTAGE: 380-420V~50-60Hz


TIMER RANGE: 0-180 MINS

TEMP RANGE: 60°C-240°C

LEFT SIDE WITH FLEX FUNCTION



STRUCTURAL DESIGN

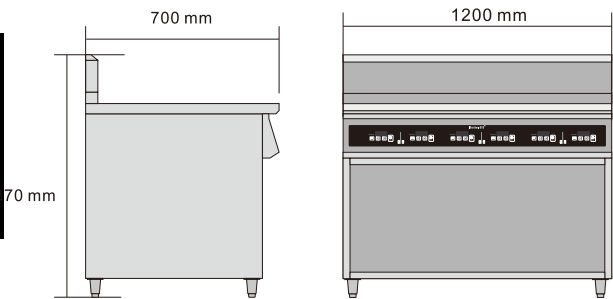

BETTER USP






DOUBLE HOB INDUCTION STOVE

EW3/5F2-H7 8500W(5000W+3500W)

DIMENSION: APPROX.40 X70X 87CM

VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

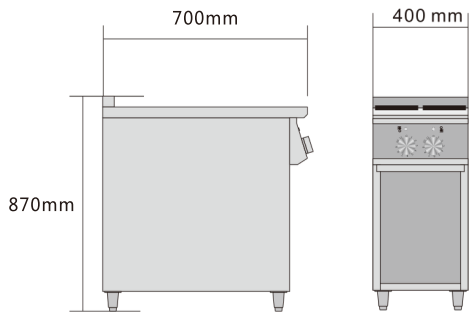

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION




DOUBLE HOB INDUCTION STOVE

EW3/5F2-H9 8500W(5000W+3500W)

DIMENSION: APPROX.40 X90X 87CM

VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

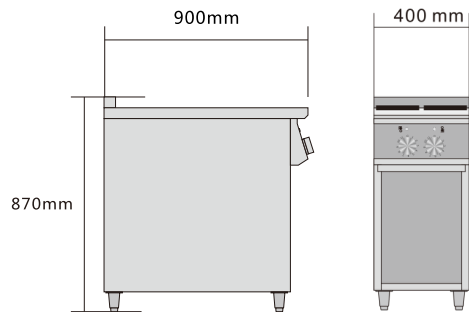

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



FOUR HOB INDUCTION STOVE

EW3/5F4-H7-W2 17000W(5000W*2+3500W*2)


DIMENSION: APPROX.80 X70X 87CM

VOLTAGE: 380-420V~50-60Hz



127

STRUCTURAL DESIGN

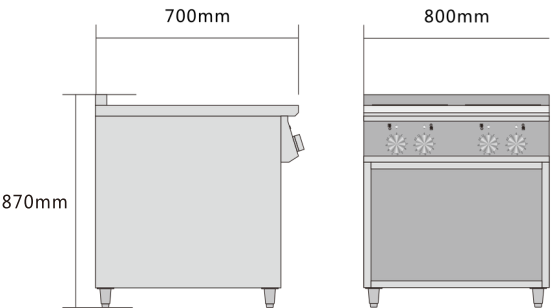

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW3/5F4-H9-W2 17000W(5000W*2+3500W*2)


DIMENSION: APPROX.80 X90X 87CM

VOLTAGE: 380-420V~50-60Hz



128

STRUCTURAL DESIGN

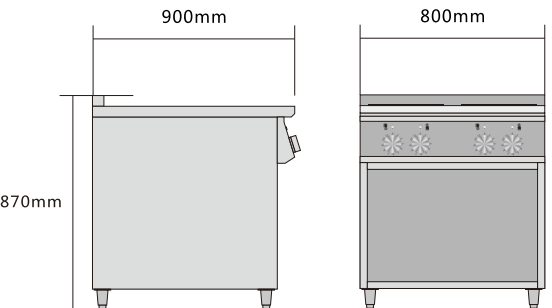

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



SIX HOB INDUCTION STOVE


EW3/5F6-H7 25500W(5000W*3+3500W*3)

DIMENSION: APPROX.120 X70 X 87CM

VOLTAGE: 380-420V~50-60Hz



STRUCTURAL DESIGN

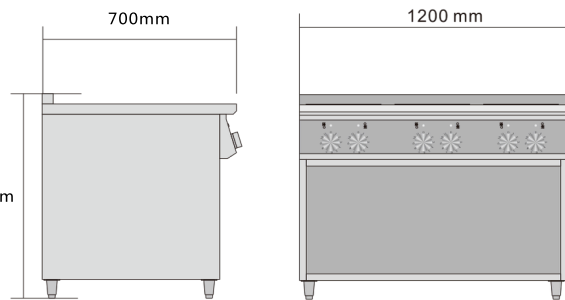

SIX HOB INDUCTION STOVE


EW3/5F6-H9 25500W(5000W*3+3500W*3)

DIMENSION: APPROX.120 X90 X 87CM

VOLTAGE: 380-420V~50-60Hz



STRUCTURAL DESIGN

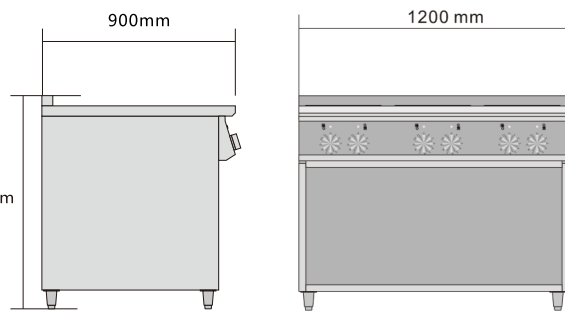

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



INFRARED INDUCTION STOVE

EW500H1-D **5000W**
 DIMENSION: APPROX. 40 X 90 X 114 CM
 VOLTAGE: 380-420V~50-60Hz
 TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

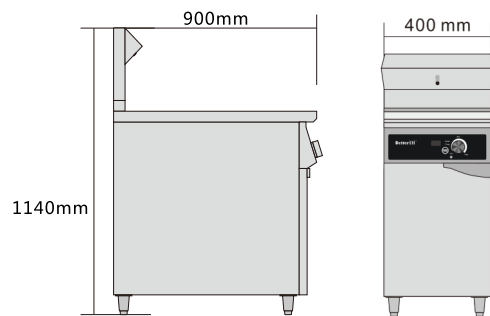

BETTER USP


- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



INFRARED INDUCTION STOVE

EW500H1-D-T **5000W**
 DIMENSION: APPROX. 40 X 90 X 114 CM
 VOLTAGE: 380-420V~50-60Hz
 TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

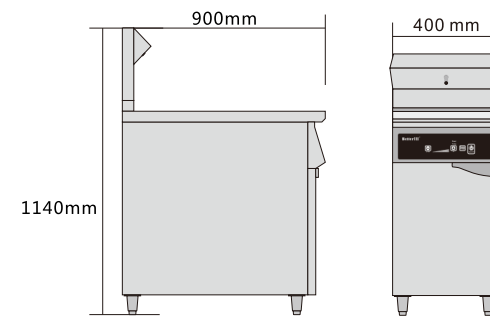

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION




SINGLE HOB INDUCTION WOK

EW050C-H7-D 5000W

DIMENSION: APPROX. 40 X 70 X 98 CM
VOLTAGE: 380-420V~50-60Hz
TEMP RANGE: 60°C-240°C

STRUCTURAL DESIGN

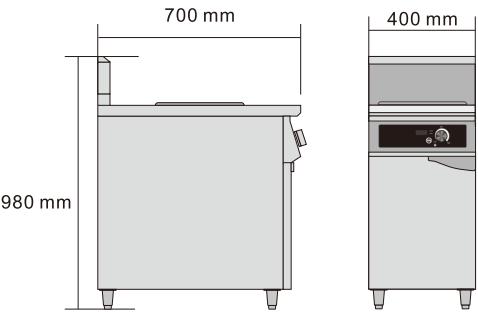

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION




SINGLE HOB INDUCTION WOK

EW080C-H7 8000W

DIMENSION: APPROX. 50 X 70 X 80 CM
VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

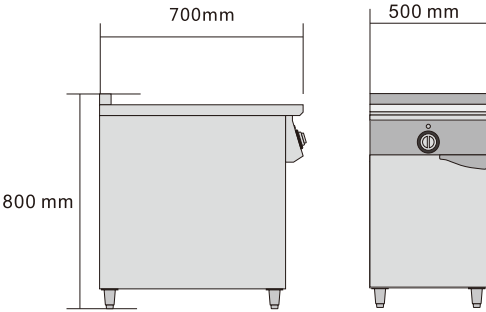

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



DOUBLE HOB INDUCTION STOVE

EW5/5HA2-H65 **5000W*2**
DIMENSION: APPROX. 35 X 65.5 X 87.5 CM
VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

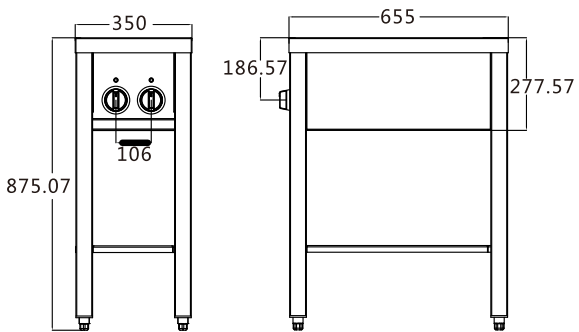

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5HA4-H65 **5000W*4**
DIMENSION: APPROX. 65.5 X 65.5 X 87.5 CM
VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

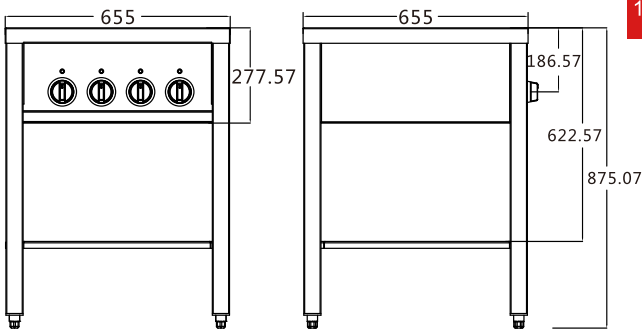

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION






DOUBLE HOB INDUCTION STOVE

EW5/5HC2-H70 **5000W*2**
DIMENSION: APPROX. 35.5 X 70 X 87.5 CM
VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

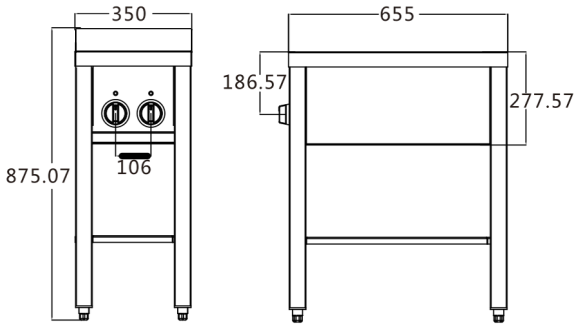

BETTER USP


- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



FOUR HOB INDUCTION STOVE

EW5/5HC4-H70 **5000W*4**
DIMENSION: APPROX. 65.5 X 70 X 87.5 CM
VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

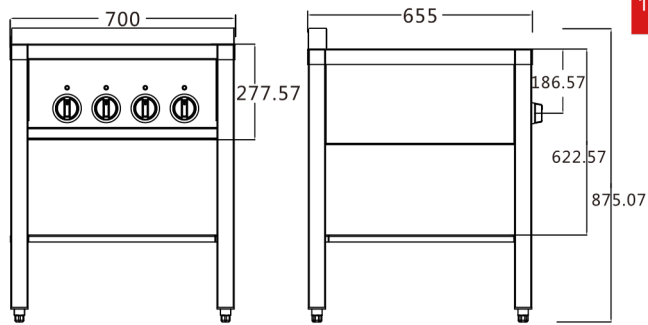

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION




DOUBLE HOB INDUCTION STOVE

EW5/5HD2-H70 5000W*2

DIMENSION: APPROX. 35 X 70 X 87.5 CM

VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

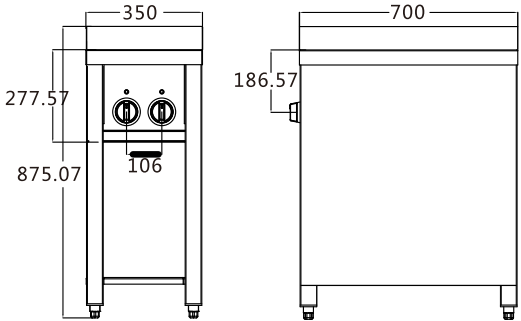

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION




FOUR HOB INDUCTION STOVE

EW5/5HD4-H70 5000W*4

DIMENSION: APPROX. 65.5 X 70 X 87.5 CM

VOLTAGE: 380-420V~50-60Hz

STRUCTURAL DESIGN

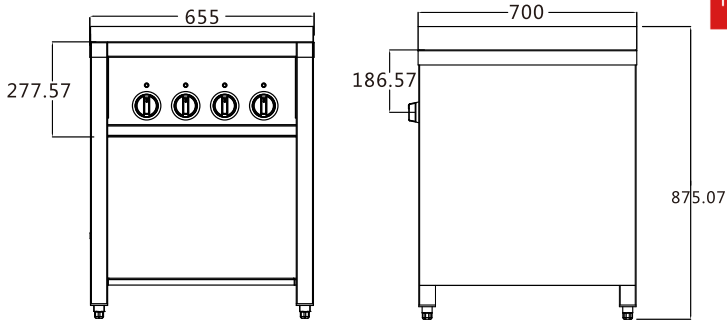

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



SINGLE HOB INDUCTION WOK


EW15WOKA 15000W

DIMENSION: APPROX. 80 X 90 X 130 CM

VOLTAGE: 208V 3N~60Hz

WITH A 400MM S/S WOKPAN AND WOKPAN HOLDER

STRUCTURAL DESIGN

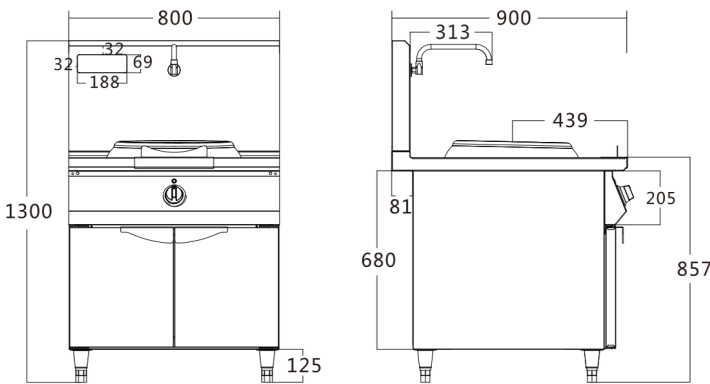

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- °C OVERHEAT PROTECTION



DOUBLE HOBBS INDUCTION WOK


EW15WOKB 15000W

DIMENSION: APPROX. 110 X 100 X 130.1 CM

VOLTAGE: 208V 3N~60Hz

WITH A 400MM S/S WOKPAN AND WOKPAN HOLDER

STRUCTURAL DESIGN

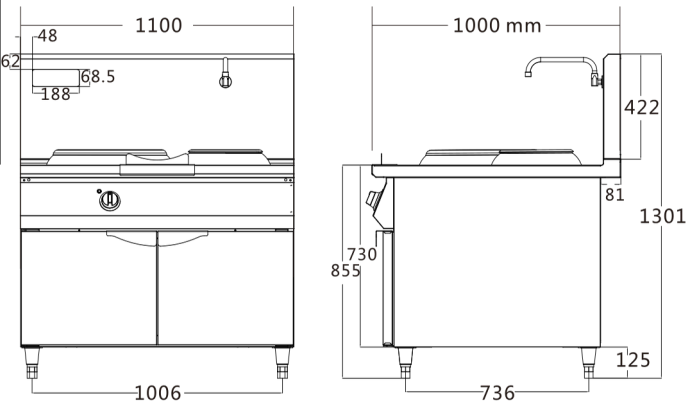

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- °C OVERHEAT PROTECTION





SINGLE HOB INDUCTION WOK


EW15WOKB-S **15000W**

DIMENSION: APPROX. 60 X 85 X 130 CM

VOLTAGE: 208V 3N~60Hz

WITH A 400MM S/S WOKPAN AND WOKPAN HOLDER

STRUCTURAL DESIGN

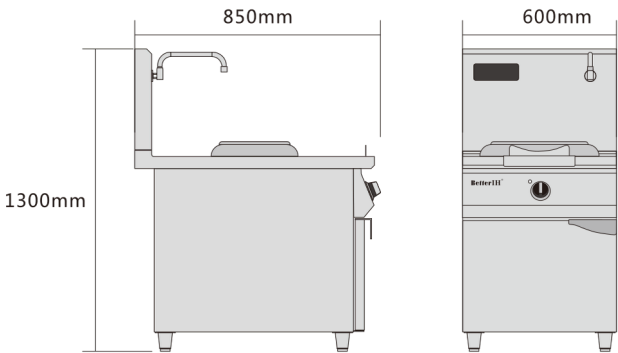

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



DOUBLE HOB INDUCTION WOK


EW15WOKB-D **15000W*2**

DIMENSION: APPROX. 120 X 85 X 130 CM

VOLTAGE: 208V 3N~60Hz

WITHA 2PCS 400MM S/S WOKPAN AND
2PCS WOKPAN HOLDER

STRUCTURAL DESIGN

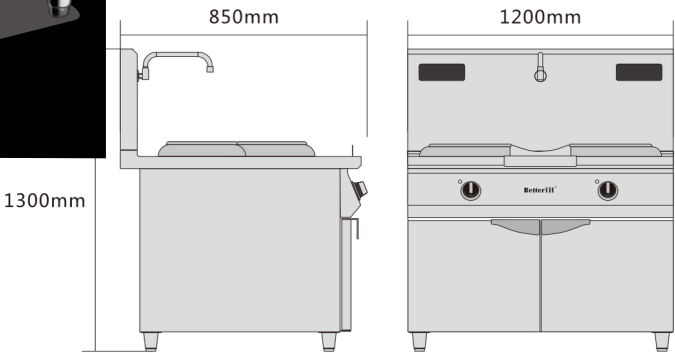

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



SINGLE STANDING INDUCTION BAIN MARIE


EW10BMA-H7 2000W

DIMENSION: APPROX. 40 X 70 X 88 CM

VOLTAGE: 220-240V~50-60Hz

TEMP RANGE: 30°C-90°C

STRUCTURAL DESIGN

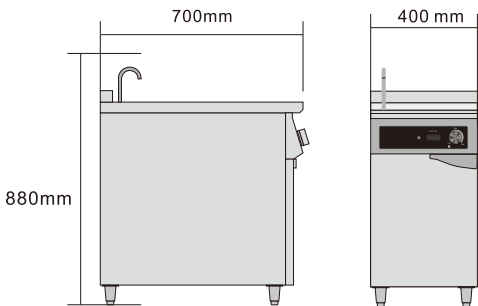

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



INDUCTION PASTA STOVE

EWLM500A-D400 6000W


DIMENSION: APPROX. 40 X 70 X 98 CM

VOLTAGE: 380-420V3N~50-60Hz

TEMP RANGE: 60°C-100°C

CAPACITY: 20L

STRUCTURAL DESIGN

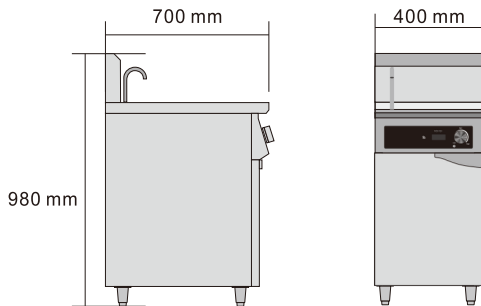

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



AUTO-LIFTING SINGLE STANDING INDUCTION DEEP FRYER

EW100L-T-L-H7 **10000W**
DIMENSION: APPROX.40 X70X 110CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 15MINS
TEMPERATURE RANGE:60°C-190°C
CAPACITY: 30L

STRUCTURAL DESIGN

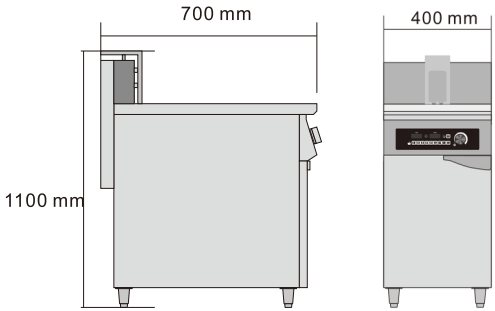

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



AUTO-LIFTING DOUBLE STANDING INDUCTION DEEP FRYER

EW100L-T2-L-H7 **10000W*2**
DIMENSION: APPROX.80 X70X 110CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 15MINS
TEMPERATURE RANGE:60°C-190°C
CAPACITY: 30L+30L

STRUCTURAL DESIGN

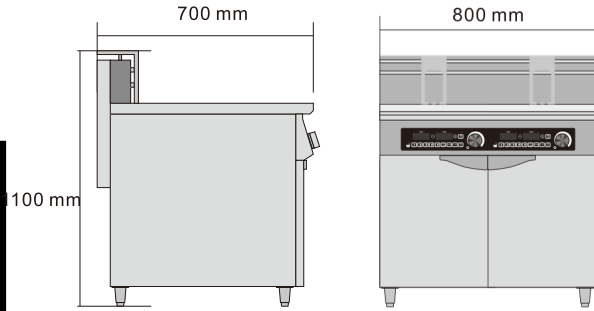

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



SINGLE STANDING INDUCTION DEEP FRYER

EW100Z-T-H9 **10000W**
DIMENSION: APPROX. 40 X 90 X 98 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE: 80°C-190°C
CAPACITY: 30L

STRUCTURAL DESIGN

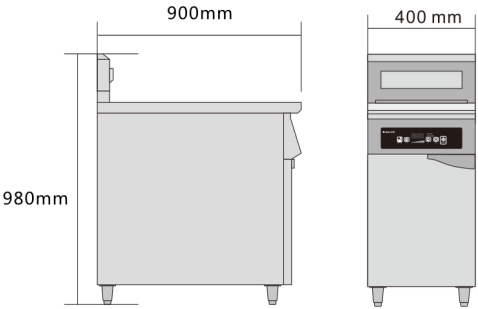

BETTER USP


- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION



SINGLE STANDING INDUCTION DEEP FRYER

EW100Z-T-H7 **10000W**
DIMENSION: APPROX. 40 X 70 X 98 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE: 80°C-190°C
CAPACITY: 30L

STRUCTURAL DESIGN

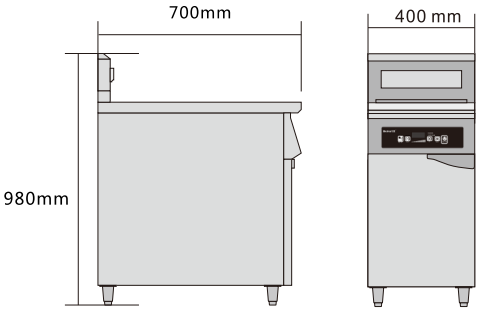

BETTER USP

- BETTER-CARFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION




DOUBLE STANDING INDUCTION DEEP FRYER

EW200Z-T-H9 **10000W*2**

DIMENSION: APPROX.80 X90X 98CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE:80°C-190°C
CAPACITY: 30L+30L

STRUCTURAL DESIGN

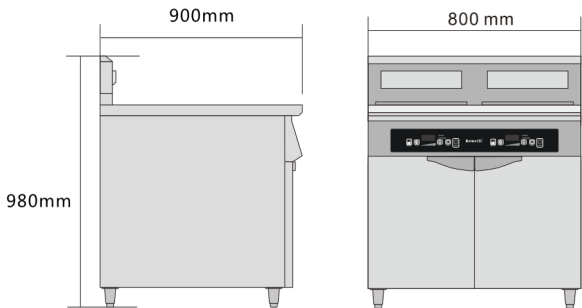

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION




DOUBLE STANDING INDUCTION DEEP FRYER

EW200Z-T-H7 **10000W*2**

DIMENSION: APPROX.80 X70X 98CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE:80°C-190°C
CAPACITY: 30L+30L

STRUCTURAL DESIGN

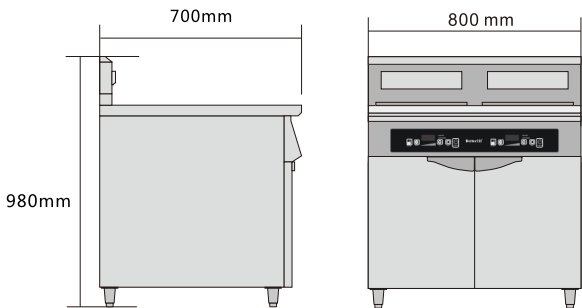

BETTER USP


-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  CLEAR LED DISPLAY
-  EASY CONTROL PANEL
-  OVERHEAT PROTECTION



SINGLE STANDING INDUCTION DEEP FRYER

EW100Z-10C-H7 **9000W**
DIMENSION: APPROX. 40 X 70 X 100.3 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE: 60°C-190°C
CAPACITY: 10L
TFT DISPLAY

STRUCTURAL DESIGN

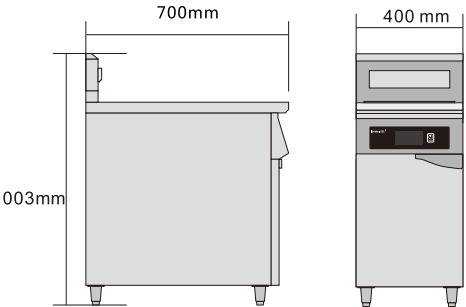

BETTER USP


- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



DOUBLE STANDING INDUCTION DEEP FRYER

EW200Z-20C-H7 **9000W*2**
DIMENSION: APPROX. 60 X 70 X 100.3 CM
VOLTAGE: 380-420V~50-60Hz
TIMER RANGE: 0- 180MINS
TEMPERATURE RANGE: 60°C-190°C
CAPACITY: 10L*2
TFT DISPLAY

STRUCTURAL DESIGN

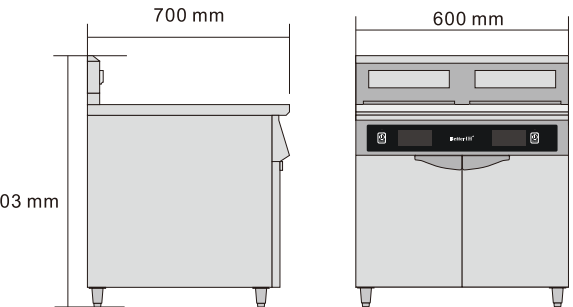

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- CLEAR LED DISPLAY
- EASY CONTROL PANEL
- OVERHEAT PROTECTION



INDUCTION GRIDDLE


EW100P-H9 **10000W**

DIMENSION: APPROX. 80 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TEMPERATURE RANGE: 80°C-300°C

STRUCTURAL DESIGN

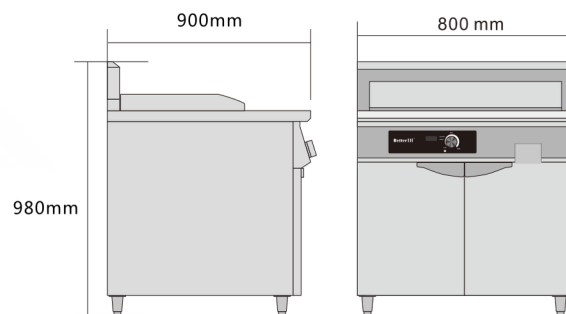

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



INDUCTION GRIDDLE


EW100P-H7 **10000W**

DIMENSION: APPROX. 80 X 70 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TEMPERATURE RANGE: 80°C-300°C

STRUCTURAL DESIGN

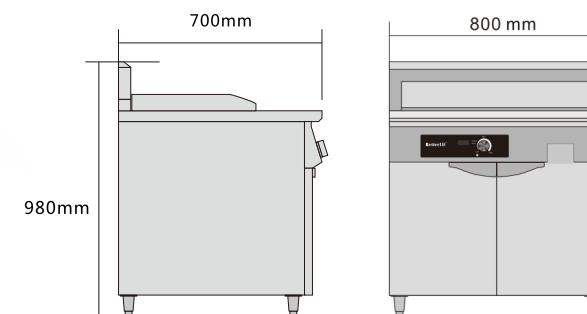

BETTER USP



BETTER-CARFT
SURFACE



METAL-FEET
DESIGN



SOLID
STAINLESS BODY



CLEAR
LED DISPLAY



EASY
CONTROL PANEL



OVERHEAT
PROTECTION



INDUCTION GRIDDLE


EW100P-H7-S-K **5000W**

DIMENSION: APPROX. 40 X 70 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TEMP RANGE: 80°C-300°C

STRUCTURAL DESIGN

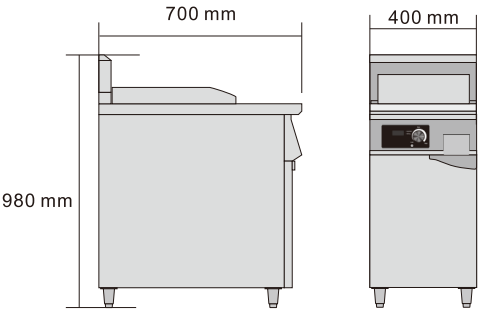

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  LED CLEAR LED DISPLAY
-  - + EASY CONTROL PANEL
-  OVERHEAT PROTECTION



INDUCTION GRIDDLE

EW100P-H7-S **5000W**


DIMENSION: APPROX. 40 X 70 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0- 120MINS

TEMP RANGE: 80°C-300°C

STRUCTURAL DESIGN

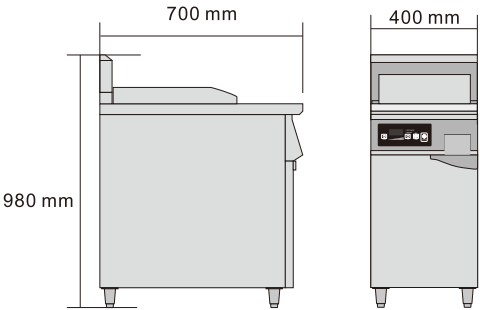

BETTER USP

-  BETTER-CARFT SURFACE
-  METAL-FEET DESIGN
-  SOLID STAINLESS BODY
-  LED CLEAR LED DISPLAY
-  - + EASY CONTROL PANEL
-  OVERHEAT PROTECTION

INDUCTION GRIDDLE

EW100P-T-H9 10000W


DIMENSION: APPROX. 80 X 90 X 98 CM

VOLTAGE: 380-420V~50-60Hz

TIMER RANGE: 0-180MINS

TEMPERATURE RANGE: 80°C-300°C

STRUCTURAL DESIGN

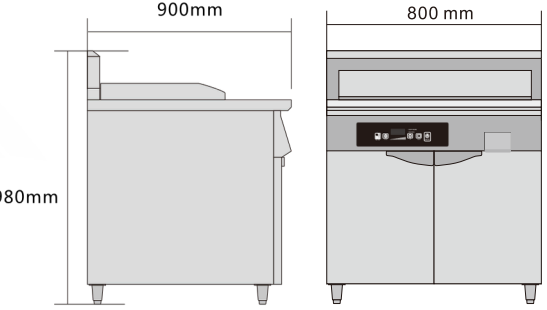

INDUCTION GRIDDLE


EW100P-H75 5000W*2

DIMENSION: APPROX. 80 X 70 X 93.3 CM

VOLTAGE: 380-420V~50-60Hz

TEMPERATURE RANGE: 80°C-300°C

STRUCTURAL DESIGN

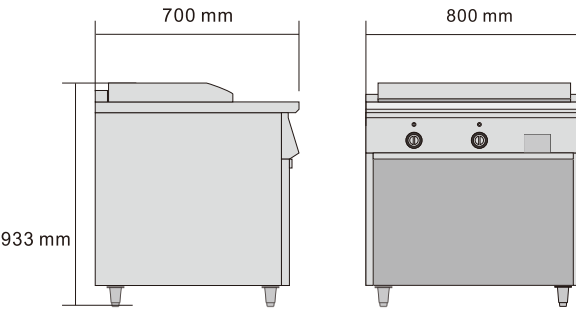

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION

BETTER USP

- BETTER-CRAFT SURFACE
- METAL-FEET DESIGN
- SOLID STAINLESS BODY
- LED CLEAR LED DISPLAY
- + EASY CONTROL PANEL
- OVERHEAT PROTECTION