



Wine Cooler

Stainless steel door frame
trim built-in or free
standing



**OUR
FOUNDER'S**

THE FUTURE START HERE



Our ultimate goal is your satisfaction.

ZERTIFIKAT • CERTIFICATE • CERTIFICADO • CERTIFICATE	 	
	Attestation of Conformity No. EBA 006176 0065 Rev. 02	
Holder of Certificate: SALUX Electrical Appliance Co. Ltd. House 18/19, Sengul Street, No. 10/10000 Thimphu 10000 Thimphu (Bhutan)		
Name of Object: Electronic refrigerators (Wine cooler)		
The Attestation of Conformity is issued on a voluntary basis according to the Decision (2014/634/EU) relating to electronic refrigerators. It confirms that the listed appliance complies with all essential requirements of the Directive and is subject to the technical specifications, applicable at the time of issuance. It refers only to the particular sample submitted for testing and certification. It does not cover other similar products.		
Test report no.:	GAT-H0202204	
Date:	2024-12-27	
 (Mr. Zhu)		
Page 1 of 1 After preparation of the necessary technical documentation as well as the ECU Declaration of conformity, the required CE marking can be affixed on the product. The Declaration of conformity is valid under the sole responsibility of the manufacturer. Other relevant CE Declarations have to be obtained.		
For ILUV Product Service Center • Certificate holder • Test center • ILUV Member • Company		

[illegible]

FACTORY VIEW



Cooling Testing

Ensure product quality fulfills standard requirements.



Foaming

Safety technique in environmental cyclopentane foaming process.



Voltage Test System

Garry out DC voltage endurance, and leakage current measure of cable main insulation AC voltage test according product technology farms and condition stipulation



Temperature Consistency Test

Allocated the consummate examine equipment and soft-design. Collected backed up by over 15 years of products development and manufacturing experience engineers.

Keeping a steady temperature. Fan-circulated to ensure that the temperature distribution is consistent throughout.



Leak Detector

Supported by detection program have improved the accuracy of lead detection of wine coolers.



Charging-Up Refrigerant

R600a - As dynamic simulation of household cooling appliance. Be beneficial to environment protection .

WINE COOLER



18
series



28
series



36
series




54
series



54
series



76
series

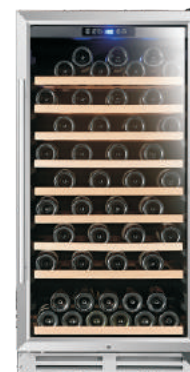

128
series



168
series



WINE COOLER



INTERNAL Blue LED LIGHTING

The internal soft blue lighting attracts the eyes when throwing party, and easy to find out the favorite wine or drinks.



NICE WOODEN SHELVES

Made with the finest beech wood, these shelves are easy to slide out and are strong enough to hold your favorite wine bottles. also soft enough to protect your wine labels without being scratched.



SUPER SILENT

Can be kept almost anywhere in the house, as long as the place you choose is weather proof with a normal electrical supply.



CARBON FILTER

The carbon filter could absorb odor, keep wine and drinks in good taste.



DIGITAL CONTROL FUNCTION

LED temperature display with touch control and smart memory function.

The control panel will lock automatically when not used for 3 minutes. Press up & down button for 3 seconds to unlock. It could prevent the well-set program from being disrupted due to accidentally operation.

SRW-18

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W295*D575*H820 mm

SRW-18S



SRW-18D



SRW-18BS



SRW-18BS



Model

60L
capacity



Capacity(liters)/Bottles	60L / 20 bottles	60L / 17 bottles	60L / 60 cans	60L / 60 cans
Door features	S.S. door frame & handle ; two layers glass ; with lock.	S.S. door frame & handle ; two layers glass ; with lock.	S.S. door frame & handle ; two layers glass ; with lock.	S.S. foam door & S.S handle ;
Temperature zone	Single zone	Dual-zone	Single zone	Single zone
Control	Touch button	Touch button	Touch button	Touch button
Shelf	5 wooden shelves (non ball bearing)	4 wooden shelves (non ball bearing)	4 wire shelves (non ball bearing)	4 wire shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue	Blue
Front vent	Black	Stainless steel	Black	Stainless steel
Operation	Compressor	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12 ~ 22°C	3 ~ 10°C	3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	50 W	50 W	50 W	50 W
Refrigerant	R600a	R600a	R600a	R600a
Loading	-20' container	108	108	108
	-40' container	216	216	216
	-40' HC container	324	216	216
Dimension	-Product(DXH)mm	295*575*870	295*575*870	295*575*870
	-With packaging	355*640*980	355*640*980	355*640*980
Weight	-Net Weight(Kgs)	32	32	32
	-Gross(Weight(Kgs)	35	35	35

SRW-28

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W380*D575*H820 mm

SRW-28S



SRW-28D



SRW-28BS



SRW-28BS



Model



Capacity(liters)/Bottles	90L / 32 bottles	90L / 28 bottles	90L / 96 cans	90L / 96 cans
Door features	S.S. door frame & handle ; two layers glass ; with lock	S.S. door frame & handle ; two layers glass ; with lock.	S.S. door frame & handle ; two layers glass ; with lock.	S.S. foam door & handle ;
Temperature zone	Single zone	Dual-zone	Single zone	Single zone
Control panel	Touch button	Touch button	Touch button	Touch button
Shelf	5 wooden shelves (non ball bearing)	4 wooden shelves (non ball bearing)	4 wire shelves (non ball bearing)	4 wire shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue	Blue
Front vent	Black	Black	Black	Stainless steel
Operation	Compressor	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12 ~ 22°C	3 ~ 10°C	3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50 / 60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	50 W	50 W	50 W	50 W
Refrigerant	R600a	R600a	R600a	R600a
Loading	-20' container	90	90	90
	-40' container	180	180	180
	-40' HC container	180	180	180
Dimension	-Product(WXDXH)mm	380*575*870	380*575*870	380*575*870
	-With packaging	440*640*980	440*640*980	440*640*980
Weight	-Net Weight(Kgs)	39	39	39
	-Gross(Weight(Kgs)	41	41	41

SRW-36

SRW-36DR



SRW-36BDR



SRW-36BDR



Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W595*D575*H820 mm

Model



Capacity(liters)/Bottles	120L / 40 bottles	120L / 20 bottles +53 cans	120L / 20 bottles + 53 cans
Door features	S.S. door frame & handle; two layers glass; with lock.	S.S. door frame & handle; two layers glass; with lock.	S.S. door frame & handle; two layers glass; with lock. Left S.S. foam door
Temperature zone	Dual zone	Dual-zone	Dual - zone
Control	Touch button	Touch button	Touch button
Shelf	10 wooden shelves (non ball bearing)	5 wooden shelves + 4 wire (non ball bearing)	5 wooden shelves + 4 wire (non ball bearing)
Color of interior light	Blue	Blue	Blue
Front vent	Stainless steel	Black	Stainless steel
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C / 5 ~ 22°C	5 ~ 22°C / 3 ~ 10°C	5 ~ 22°C / 3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	70 W	70 W	70 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	54	54
	-40' container	108	108
	-40' HC container	108	108
Dimension	-Product(WXD*H)mm	595*575*870	595*575*870
	-With packaging	660*650*980	660*650*980
Weight	-Net Weight(Kgs)	49	49
	-Gross Weight(Kgs)	52	52

SRW-54

SRW-54S



SRW-54D

SRW-54BS
Beverage Cooler

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W595*D575*H820 mm

Model



Capacity(liters)/Bottles	150L / 52 bottles	150L / 46 bottles	150L / 126 can
Door features	S.S. door frame & handle ;two layers glass with lock.	S.S. door frame & handle ;two layers glass with lock.	S.S. door frame & handle ;two layers glass with lock
Temperature zone	Single zone	Dual zone	Single zone
Control panel	Touch button	Touch button	Touch button
Shelf	6 wooden shelves (non ball bearing)	6 wooden shelves (non ball bearing)	4 wire shelves
Color of interior light	Blue	Blue	Blue
Front vent	Black	Black	Black
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12 ~ 22°C	3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50 / 60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	70 W	70 W	70 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	54	54
	-40' container	108	108
	-40' HC container	108	108
Dimension	-Product(WXDXH)mm	595*575*870	595*575*870
	-With packaging	660*650*980	660*650*980
Weight	-Net Weight(Kgs)	49	49
	-Gross Weight(Kgs)	52	52

SRW-54S


SRW-54BS
Beverage Cooler



SRW-54BS
Beverage Cooler



SRW-54BS
Beverage Cooler

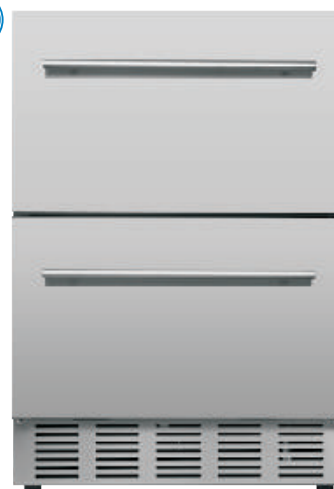

SRW-54BS
Beverage Cooler



Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W595*D575*H820 mm

Model

150L
capacity



Capacity(liters)/Bottles	150L / 84 can	150L / 84 cans	150L / 84 cans	150L / 84 cans
Door features	S.S. foam door & S.S handle ;	Top S.S. drawer lower S.S foam door & S.S handle	S.S. drawer & S.S handle	S.S. drawer & S.S handle ;
Temperature zone	Single zone	Single zone	Single zone	Single zone
Control panel	Touch button	Touch button	Touch button	Touch button
Shelf	4 wire shelves	Top S.S ball bearing drawer, lower 2 wire shelves	2 S.S ball bearing drawer	3 S.S ball bearing drawer
Color of interior light	Blue	Blue	Blue	Blue
Front vent	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Operation	Compressor	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	3 ~ 10°C	3 ~ 10°C	3 ~ 10°C	3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	70 W	70 W	70 W	70 W
Refrigerant	R600a	R600a	R600a	R600a
Loading	-20' container	54	54	54
	-40' container	108	108	108
	-40' HC container	108	108	108
Dimension	-Product(WXDXH)mm	595*575*870	595*575*870	595*575*870
	-With packaging	660*650*980	660*650*980	660*650*980
Weight	-Net Weight(Kgs)	49	49	49
	-Gross(Weight(Kgs)	52	52	52

SRW-56

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes
Body dimension:
W760*D575*H820 mm

SRW-56DR

SRW-56BDR
Beverage CoolerSRW-56BDR
Beverage Cooler

Model



Capacity(liters)/Bottles	180L / 64 bottles	180L / 32 bottles+126 cans	180L / 32 bottles + 126 cans
Door features	S.S. door frame & handle ;two layers glass with lock.	S.S. door frame & handle ;two layers glass with lock ;left S.S. foam door.	Full glass door ; two layers glass with lock.
Temperature zone	Dual - zone	Dual - zone	Dual - zone
Control	Touch button	Touch button	Touch button
Shelf	10 wooden shelves (non ball bearing)	5 wooden shelves (non ball bearing)+4 wire	5 wooden shelves (non ball bearing) +4 wire
Color of interior light	Blue	Blue	Blue
Front vent	Stainless steel	Stainless steel	Black
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C / 5 ~ 22°C	5 ~ 22°C / 3 ~ 10°C	5 ~ 22°C / 3 ~ 10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	70 W	70 W	70 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	45	45
	-40' container	90	90
	-40' HC container	90	90
Dimension	-Product(WXDXH)mm	760*575*870	760*575*870
	-With packaging	840*650*940	840*650*940
Weight	-Net Weight(Kgs)	56	56
	-Gross Weight(Kgs)	64	64

SRW-59

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-59S



SRW-59S



Model

Capacity(liters)/Bottles	59L / 200 Cans	59L / 59 bottles
Do or features	Full glass door; two layers glass with lock.	Full glass door; two layers glass with lock.
Temperature zone	Single zone	Singhe zone
Control panel	Touch button	Touch button
Shelf	5 wire sheleves (non ball bearing)	14 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue
Front vent	Black	Black
Operation	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling
Adjustable temperature	3 ~ 10°C	5 ~ 22°C
Reted Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	80 W	80 W
Refrigerant	R600a	R600a
Loading	-20' container	48
	-40' container	96
	-40' HC container	96
Dimension	-Product(WXDXH)mm	430*510*1670
	-With packaging	465*585*1840
Weight	-Net Weight(Kgs)	70
	-Gross(Weight(Kgs)	73

SRW-60

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-60S



SRW-60S



SRW-60S



175L
capacity



Model

Capacity(liters)/Bottles	175L / 168 Cans	175L / 69 bottles	175L / 69 bottles
Door features	Full glass door; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.
Temperature zone	Single zone	Single zone	Single zone
Control panel	Touch button	Touch button	Touch button
Shelf	5 wire shelves (non ball bearing)	12 wooden shelves (non ball bearing)	12 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue
Front vent	Black	Black	Stainless steel
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	3 ~ 10°C	5 ~ 22°C	5 ~ 22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	75 W	75 W	75 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	40	40
	-40' container	84	84
	-40' HC container	84	84
Dimension	-Product(WXDXH)mm	500*510*1440	500*510*1440
	-With packaging	560*580*1495	560*580*1495
Weight	-Net Weight(Kgs)	58	58
	-Gross(Weight(Kgs)	63	63

SRW-70

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-70S



SRW-70S



SRW-70S



Model

Capacity(liters)/Bottles	220L / 216 Cans	220L / 75 bottles	220L / 75 bottles
Door features	Full glass door; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock
Temperature zone	Single zone	Single zone	Single zone
Control panel	Touch button	Touch button	Touch button
Shelf	6 wire shelves (non ball bearing)	14 wooden shelves (non ball bearing)	14 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue
Front vent	Black	Black	Stainless steel
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	3 ~ 10°C	5 ~ 22°C	5 ~ 22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50 / 60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	75 W	75 W	75 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	36	36
	-40' container	76	76
	-40' HC container	76	76
Dimension	-Product(WXDXH)mm	555*510*1630	555*510*1630
	-With packaging	615*585*1685	615*585*1685
Weight	-Net Weight(Kgs)	80	80
	-Gross Weight(Kgs)	86	86

SRW-76

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-76S



SRW-76D



Model

Capacity(liters)/Bottles	225L / 81 bottles	225L / 75 bottles
Door features	S.S. door frame & handle ; two layers glass with lock.	S.S. door frame & handle ; two layers glass with lock.
Temperature zone	Single zone	Dual zone
Control panel	Touch button	Touch button
Shelf	9 wooden shelves (non ball bearing)	9 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue
Front vent	Stainless steel	Stainless steel
Operation	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12~22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	80 W	80 W
Refrigerant	R600a	R600a
Loading	-20' container	27
	-40' container	54
	-40' HC container	108
Dimension	-Product(WXDXH)mm	595*575*1206
	-With packaging	660*650*1262
Weight	-Net Weight(Kgs)	64
	-Gross(Weight(Kgs)	69

SRW-118

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes


SRW-118BDR



SRW-118BDR



SRW-118DR

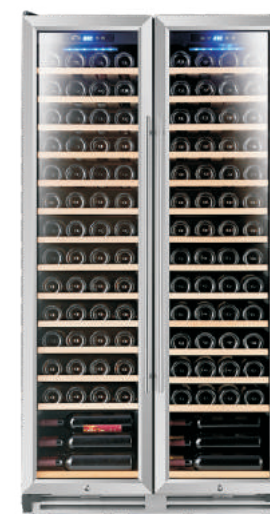

118L
capacity

compressor

Constant
temperature
humidity

Model

Capacity(liters)/Bottles	118L / 59 bottles + 200 Cans	118L / 59 bottles + 200 Cans	118L / 118 bottles
Door features	Full glass door; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock
Temperature zone	Dual - zone	Dual - zone	Dual - zone
Control panel	Touch button	Touch button	Touch button
Shelf	14 wooden shelves (non ball bearing) + 7 wire shelves	14 wooden shelves (non ball bearing) + 7 wire shelves	28 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue
Front vent	Black	Black	Stainless steel
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C / 3 ~ 10°C	5 ~ 22°C / 3 ~ 10°C	5 ~ 22°C / 5 ~ 22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50 / 60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	140 W	140 W	140 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	24	24
	-40' container	48	48
	-40' HC container	48	48
Dimension	-Product(WXDXH)mm	860*510*1670	860*510*1670
	-With packaging	930*585*1840	930*585*1840
Weight	-Net Weight(Kgs)	140	140
	-Gross Weight(Kgs)	145	145

SRW-128

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-128S



SRW-128D



Model

Capacity(liters)/Bottles	325L / 121 bottles	325L / 121 bottles
Door features	S.S. door frame & handle; two layers glass; with lock.	S.S. door frame & handle; two layers glass with lock.
Temperature zone	Single zone	Dual-zone
Control panel	Touch button	Touch button
Shelf	11 wooden shelves (non ball bearing)	11 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue
Front vent	Stainless steel	Stainless steel
Operation	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12 ~ 22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	115 W	115 W
Refrigerant	R600a	R600a
Loading	-20' container	27
	-40' container	54
	-40' HC container	54
Dimension	-Product(WXDXH)mm	595*680*1417
	-With packaging	660*750*1517
Weight	-Net Weight(Kgs)	84
	-Gross(Weight(Kgs)	90

SRW-148

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-148BDR



SRW-148DR



SRW-148BDR



Model

388L
capacity



Capacity(liters)/Bottles	388L / 66 bottles + 215 Cans	388L / 132 bottles	388L / 66 bottles + 215 Cans
Door features	Full glass door; two layers glass with lock.	Full glass door; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.
Temperature zone	Dual-zone	Dual-zone	Dual-zone
Control	Touch button	Touch button	Touch button
Shelf	10 wooden shelves (non ball bearing)	20 wooden shelves (non ball bearing)	10 wooden shelves (non ball bearing)
Color of interior light	+6 wire shelves		+6 wire shelves
Front vent	Blue	Blue	Blue
Operation	Black	Black or Stainless steel	Black or Stainless steel
Cooling system	Compressor	Compressor	Compressor
Adjustable temperature	Fan cooling	Fan cooling	Fan cooling
Rated Voltage/Frequency	5 ~ 22°C / 3~10°C	5 ~ 22°C / 5 ~ 22°C	5 ~ 22°C / 3~10°C
	100V 50/60 Hz or 115V 60Hz	100V 50/60 Hz or 115V 60Hz	100V 50/60 Hz or 115V 60Hz
Input power	or 220-240V 50/60Hz	or 220-240V 50/60Hz	or 220-240V 50/60Hz
Refrigerant	140 W	140 W	140 W
	R600a	R600a	R600a
Loading	-20' container	24	24
	-40' container	48	48
	-40' HC container	48	48
Dimension	-Product(WXD*H)mm	780*510*1800	780*510*1800
	-With packaging	860*585*1830	860*585*1830
Weight	-Net Weight(Kgs)	128	128
	-Gross(Weight(Kgs)	138	138

SRW-168

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-168S



SRW-168D




Model

Capacity(liters)/Bottles	450L / 165 bottles	450L / 165 bottles
Door features	S.S. door frame & handle ; two layers glass with lock.	S.S. door frame & handle ; two layers glass with lock.
Temperature zone	Single zone	Dual zone
Control panel	Touch button	Touch button
Shelf	15 wooden shelves (non ball bearing)	15 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue
Front vent	Stainless steel	Stainless steel
Operation	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12~22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	135 W	135 W
Refrigerant	R600a	R600a
Loading	-20' container	27
	-40' container	54
	-40' HC container	54
Dimension	-Product(WXDXH)mm	595*680*1795
	-With packaging	660*760*1850
Weight	-Net Weight(Kgs)	103
	-Gross(Weight(Kgs)	109

SRW-230

SRW-230S

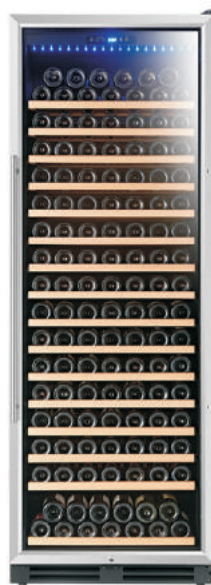

SRW-230D



Optional

Shelf stainless steel trim
Handles with different shapes



Model

Capacity(liters)/Bottles	600L / 219 bottles	600L / 219 bottles
Door features	Steel door frame & handle; two layers glass - UV protection; with lock.	Steel door frame & handle; two layers glass - UV protection; with lock.
Temperature zone	Single zone	Dual - zone
Control panel	Touch button	Touch button
Shelf	16 ball bearing wooden shelves	16 ball bearing wooden shelves
Color of interior light	Blue	Blue
Front vent	Stainless steel	Stainless steel
Operation	Compressor	Compressor
Cooling system	Fan cooling; free standing	Fan cooling; free standing
Adjustable temperature	5 ~ 22°C	5 ~ 12°C / 12~22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	180 W	180 W
Refrigerant	R600a	R600a
Loading	-20' container	21
	-40' container	45
	-40' HC container	45
Dimension	-Product(WXDXH)mm	695*690*1890
	-With packaging	770*770*1972
Weight	-Net Weight(Kgs)	123
	-Gross(Weight(Kgs)	132

SRW-368

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes

SRW-368BDR



SRW-368BDR



Model

Capacity(liters)/Bottles	735L / 760 Cans	735L / 150 bottles + 380 Cans
Door features	Full glass door; two layers glass with lock.	Full glass door; two layers glass with lock.
Temperature zone	Single zone	Dual-zone
Control panel	Touch button	Touch button
Shelf	14 wire shelves (non ball bearing)	9 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue
Front vent	Black	Black
Operation	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling
Adjustable temperature	3 ~ 10°C	5 ~ 22°C / 3~10°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	160 W	160 W
Refrigerant	R600a	R600a
Loading	-20' container	14
	-40' container	28
	-40' HC container	28
Dimension	-Product(WXDXH)mm	960*730*1880
	-With packaging	1030*810*2040
Weight	-Net Weight(Kgs)	150
	-Gross Weight(Kgs)	158

SRW-368

Optional

Shelf stainless steel trim
Built-in or free standing
With ball bearing shelf
Handles with different shapes


SRW-368BDR



SRW-368S



SRW-368DR

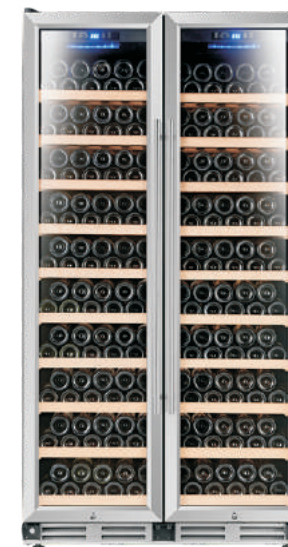

735L
capacity



Model

Capacity(liters)/Bottles	735L / 150 bottles + 380 Cans	735L / 300 bottles	735L / 300 bottles
Door features	S.S door frame & handle; two layers glass with lock.	Full glass door; two layers glass with lock.	S.S. door frame & handle; two layers glass with lock.
Temperature zone	Dual-zone	Single zone	Dual-zone
Control panel	Touch button	Touch button	Touch button
Shelf	8 wooden shelves (non ball bearing) + 8 wire	10 wooden shelves (non ball bearing)	20 wooden shelves (non ball bearing)
Color of interior light	Blue	Blue	Blue
Front vent	Black or Stainless steel	Black	Black or Stainless steel
Operation	Compressor	Compressor	Compressor
Cooling system	Fan cooling	Fan cooling	Fan cooling
Adjustable temperature	5 ~ 22°C / 3 ~ 10°C	5 ~ 22°C	5 ~ 22°C / 5 ~ 22°C
Rated Voltage/Frequency	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz	100V 50/60 Hz or 115V 60Hz or 220-240V 50/60Hz
Input power	160 W	160 W	160 W
Refrigerant	R600a	R600a	R600a
Loading	-20' container	14	14
	-40' container	28	28
	-40' HC container	28	28
Dimension	-Product(WXDXH)mm	960*730*1880	960*730*1880
	-With packaging	1030*810*2040	1030*810*2040
Weight	-Net Weight(Kgs)	150	150
	-Gross(Weight(Kgs)	158	158