

Channel Splice





Channel Splice			
	W	D	CLASSIFIED UL Upon Request *
TLCS-2-1-AL	2"	1"	1 LBS
TLCS-2-1-HDG	2"	1"	2 LBS
TLCS-2-1-SS	2"	1"	1 LBS
TLCS-2-2-AL	2"	2"	1 LBS
TLCS-2-2-HDG	2"	2"	2 LBS
TLCS-2-2-SS	2"	2"	1 LBS
TLCS-4-1-AL	4"	1"	1 LBS
TLCS-4-1-HDG	4"	1"	2 LBS
TLCS-4-1-SS	4"	1"	1 LBS
TLCS-4-2-AL	4"	2"	1 LBS
TLCS-4-2-HDG	4"	2"	3 LBS
TLCS-4-2-SS	4"	2"	2 LBS
TLCS-6-1-AL	6"	1"	1 LBS
TLCS-6-1-HDG	6"	1"	3 LBS
TLCS-6-1-SS	6"	1"	2 LBS
TLCS-6-2-AL	6"	2"	2 LBS
TLCS-6-2-HDG	6"	2"	3 LBS
TLCS-6-2-SS	6"	2"	2 LBS

Installation Guideline:

Minimum of four nuts, bolts and washers per connection. Fasteners sold separately.

Fasteners see page 30.

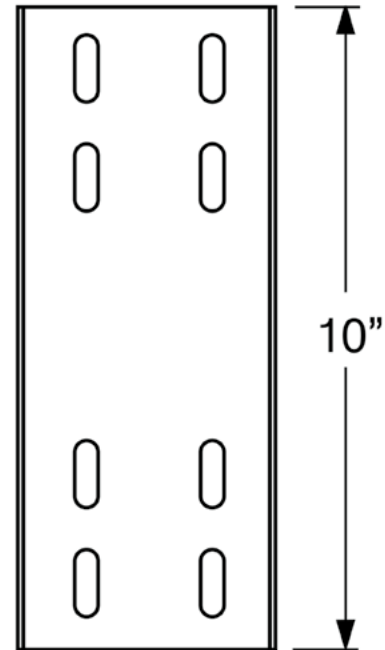

○ Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)

SS: 304 Stainless Steel (16 Gauge Thickness)

HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)


6SS: 316 Stainless Steel (16 Gauge Thickness)

available on request, minimum quantities required.


Splices and hardware sold separately.

*UL labeling available upon request from factory prior to ordering. UL Classification is only available in 2" sidewall channel and fittings.

90° Vertical Outside Channel 3" Radius Elbows

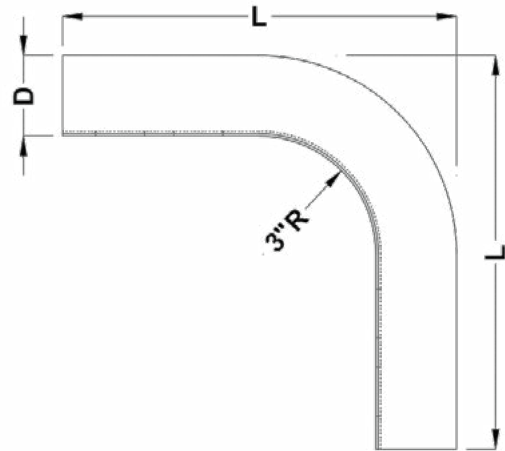

SIDE VIEW

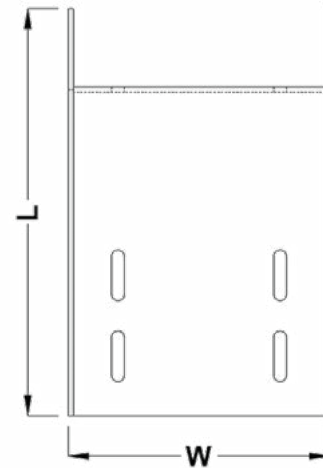

END VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
 SS: 304 Stainless Steel (16 Gauge Thickness)
 HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
 6SS: 316 Stainless Steel (16 Gauge Thickness)
 available on request, minimum quantities required.


Splices and hardware sold separately.

Fasteners see page 30.

W D L  CLASSIFIED Upon Request *				
90° Vertical Outside Bend 3" Radius				
TLVO-2-1-AL-3R	2"	1"	8.5"	1 LBS
TLVO-2-1-HDG-3R	2"	1"	8.5"	2 LBS
TLVO-2-1-SS-3R	2"	1"	8.5"	1 LBS
TLVO-2-2-AL-3R	2"	2"	9.5"	2 LBS
TLVO-2-2-HDG-3R	2"	2"	9.5"	2 LBS
TLVO-2-2-SS-3R	2"	2"	9.5"	2 LBS
TLVO-4-1-AL-3R	4"	1"	8.5"	2 LBS
TLVO-4-1-HDG-3R	4"	1"	8.5"	3 LBS
TLVO-4-1-SS-3R	4"	1"	8.5"	2 LBS
TLVO-4-2-AL-3R	4"	2"	9.5"	2 LBS
TLVO-4-2-HDG-3R	4"	2"	9.5"	4 LBS
TLVO-4-2-SS-3R	4"	2"	9.5"	3 LBS
TLVO-6-1-AL-3R	6"	1"	8.5"	2 LBS
TLVO-6-1-HDG-3R	6"	1"	8.5"	4 LBS
TLVO-6-1-SS-3R	6"	1"	8.5"	3 LBS
TLVO-6-2-AL-3R	6"	2"	9.5"	2 LBS
TLVO-6-2-HDG-3R	6"	2"	9.5"	5 LBS
TLVO-6-2-SS-3R	6"	2"	9.5"	4 LBS

*UL Labeling available upon request from factory prior to ordering.
 UL Classification is only available in 2" sidewall channel and fittings.

90° Vertical Outside Channel 12" Radius Elbows

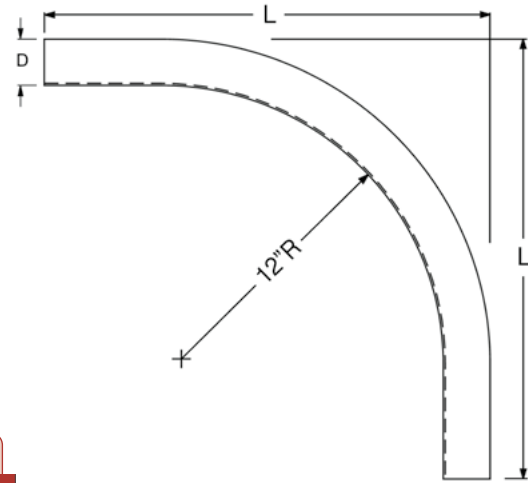

SIDE VIEW



END VIEW

○ Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
 SS: 304 Stainless Steel (16 Gauge Thickness)
 HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
 6SS: 316 Stainless Steel (16 Gauge Thickness)
 available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.

W D L CLASSIFIED UL Upon Request				
90° Vertical Outside Bend 12" Radius				
TLVO-2-1-AL-12R	2"	1"	18"	2 LBS
TLVO-2-1-HDG-12R	2"	1"	18"	4 LBS
TLVO-2-1-SS-12R	2"	1"	18"	3 LBS
TLVO-2-2-AL-12R	2"	2"	19"	3 LBS
TLVO-2-2-HDG-12R	2"	2"	19"	6 LBS
TLVO-2-2-SS-12R	2"	2"	19"	4 LBS
TLVO-4-1-AL-12R	4"	1"	18"	3 LBS
TLVO-4-1-HDG-12R	4"	1"	18"	6 LBS
TLVO-4-1-SS-12R	4"	1"	18"	4 LBS
TLVO-4-2-AL-12R	4"	2"	19"	3 LBS
TLVO-4-2-HDG-12R	4"	2"	19"	8 LBS
TLVO-4-2-SS-12R	4"	2"	19"	4 LBS
TLVO-6-1-AL-12R	6"	1"	18"	3 LBS
TLVO-6-1-HDG-12R	6"	1"	18"	8 LBS
TLVO-6-1-SS-12R	6"	1"	18"	4 LBS
TLVO-6-2-AL-12R	6"	2"	19"	4 LBS
TLVO-6-2-HDG-12R	6"	2"	19"	9 LBS
TLVO-6-2-SS-12R	6"	2"	19"	5 LBS

*UL Labeling available upon request from factory prior to ordering.
 UL Classification is only available in 2" sidewall channel and fittings.

Vertical Inside Channel 3" Radius Elbows




90° Vertical Inside Bend 3" Radius




TLVI-2-1-AL-3R	2"	1"	7.5"	1 LBS
TLVI-2-1-HDG-3R	2"	1"	7.5"	2 LBS
TLVI-2-1-SS-3R	2"	1"	7.5"	1 LBS
TLVI-2-2-AL-3R	2"	2"	7.5"	2 LBS
TLVI-2-2-HDG-3R	2"	2"	7.5"	2 LBS
TLVI-2-2-SS-3R	2"	2"	7.5"	2 LBS
TLVI-4-1-AL-3R	4"	1"	7.5"	2 LBS
TLVI-4-1-HDG-3R	4"	1"	7.5"	3 LBS
TLVI-4-1-SS-3R	4"	1"	7.5"	2 LBS
TLVI-4-2-AL-3R	4"	2"	7.5"	2 LBS
TLVI-4-2-HDG-3R	4"	2"	7.5"	4 LBS
TLVI-4-2-SS-3R	4"	2"	7.5"	3 LBS
TLVI-6-1-AL-3R	6"	1"	7.5"	2 LBS
TLVI-6-1-HDG-3R	6"	1"	7.5"	4 LBS
TLVI-6-1-SS-3R	6"	1"	7.5"	3 LBS
TLVI-6-2-AL-3R	6"	2"	7.5"	2 LBS
TLVI-6-2-HDG-3R	6"	2"	7.5"	5 LBS
TLVI-6-2-SS-3R	6"	2"	7.5"	4 LBS

*UL Labeling available upon request from factory prior to ordering.
UL Classification is only available in 2" sidewall channel and fittings.

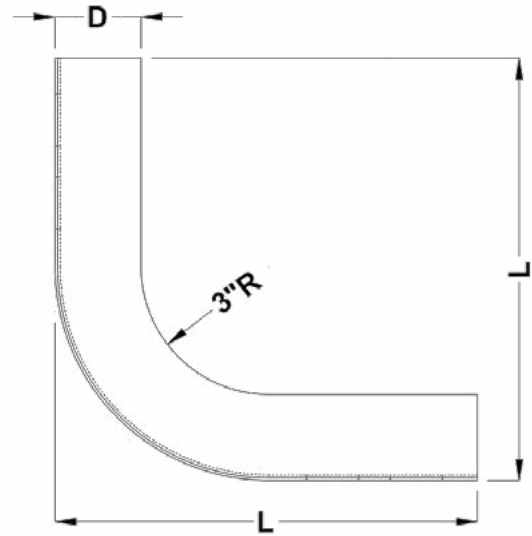

SIDE VIEW

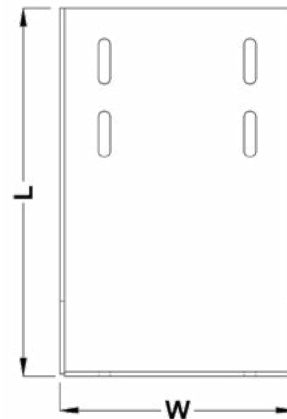

END VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
SS: 304 Stainless Steel (16 Gauge Thickness)
HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
6SS: 316 Stainless Steel (16 Gauge Thickness)
available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.


Vertical Inside Channel 12" Radius Elbows




90° Vertical Inside Bend 12" Radius



TLVI-2-1-AL-12R	2"	1"	19"	2 LBS
TLVI-2-1-HDG-12R	2"	1"	19"	4 LBS
TLVI-2-1-SS-12R	2"	1"	19"	3 LBS
TLVI-2-2-AL-12R	2"	2"	19"	3 LBS
TLVI-2-2-HDG-12R	2"	2"	19"	6 LBS
TLVI-2-2-SS-12R	2"	2"	19"	3 LBS
TLVI-4-1-AL-12R	4"	1"	19"	3 LBS
TLVI-4-1-HDG-12R	4"	1"	19"	6 LBS
TLVI-4-1-SS-12R	4"	1"	19"	4 LBS
TLVI-4-2-AL-12R	4"	2"	19"	3 LBS
TLVI-4-2-HDG-12R	4"	2"	19"	8 LBS
TLVI-4-2-SS-12R	4"	2"	19"	5 LBS
TLVI-6-1-AL-12R	6"	1"	19"	4 LBS
TLVI-6-1-HDG-12R	6"	1"	19"	8 LBS
TLVI-6-1-SS-12R	6"	1"	19"	5 LBS
TLVI-6-2-AL-12R	6"	2"	19"	4 LBS
TLVI-6-2-HDG-12R	6"	2"	19"	10 LBS
TLVI-6-2-SS-12R	6"	2"	19"	6 LBS

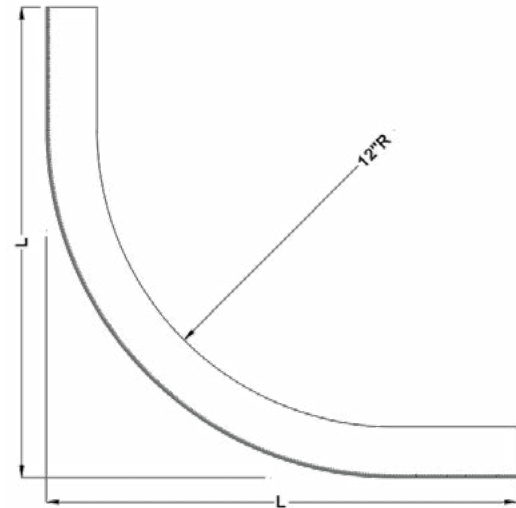

TOP VIEW

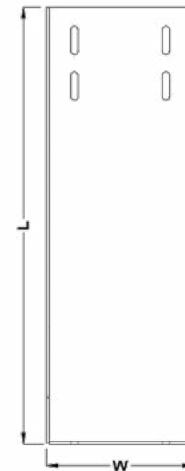

END VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)

SS: 304 Stainless Steel (16 Gauge Thickness)

HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)

6SS: 316 Stainless Steel (16 Gauge Thickness)
available on request, minimum quantities required.

Larger radius available upon request.

Splices and hardware sold separately.

Fasteners see page 30.

*UL Labeling available upon request from factory prior to ordering.
UL Classification is only available in 2" sidewall channel and fittings.

Horizontal Channel 3" Radius Elbows




90° Horizontal Bend 3" Radius



TLHE-2-1-AL-3R	2"	1"	9.75"	1 LBS
TLHE-2-1-HDG-3R	2"	1"	9.75"	3 LBS
TLHE-2-1-SS-3R	2"	1"	9.75"	2 LBS
TLHE-2-2-AL-3R	2"	2"	9.75"	2 LBS
TLHE-2-2-HDG-3R	2"	2"	9.75"	4 LBS
TLHE-2-2-SS-3R	2"	2"	9.75"	3 LBS
TLHE-4-1-AL-3R	4"	1"	11.75"	2 LBS
TLHE-4-1-HDG-3R	4"	1"	11.75"	4 LBS
TLHE-4-1-SS-3R	4"	1"	11.75"	3 LBS
TLHE-4-2-AL-3R	4"	2"	11.75"	2 LBS
TLHE-4-2-HDG-3R	4"	2"	11.75"	5 LBS
TLHE-4-2-SS-3R	4"	2"	11.75"	3 LBS
TLHE-6-1-AL-3R	6"	1"	13.75"	3 LBS
TLHE-6-1-HDG-3R	6"	1"	13.75"	5 LBS
TLHE-6-1-SS-3R	6"	1"	13.75"	4 LBS
TLHE-6-2-AL-3R	6"	2"	13.75"	3 LBS
TLHE-6-2-HDG-3R	6"	2"	13.75"	6 LBS
TLHE-6-2-SS-3R	6"	2"	13.75"	4 LBS

*UL Labeling available upon request from factory prior to ordering.
UL Classification is only available in 2" sidewall channel and fittings.

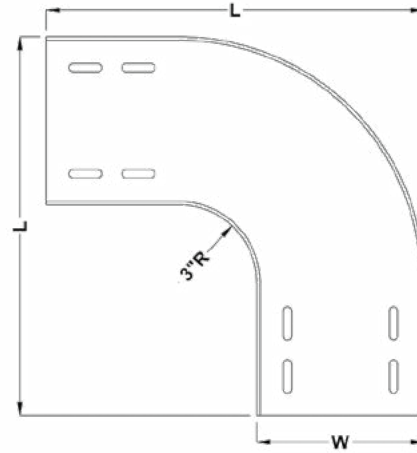

TOP VIEW



SIDE VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
SS: 304 Stainless Steel (16 Gauge Thickness)
HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
6SS: 316 Stainless Steel (16 Gauge Thickness)
available on request, minimum quantities required.


Splices and hardware sold separately.

Fasteners see page 30.


Horizontal Channel 12" Radius Elbows



W D L 90° Horizontal Bend 12" Radius				
TLHE-2-1-AL-12R	2"	1"	18"	2 LBS
TLHE-2-1-HDG-12R	2"	1"	18"	5 LBS
TLHE-2-1-SS-12R	2"	1"	18"	3 LBS
TLHE-2-2-AL-12R	2"	2"	19"	3 LBS
TLHE-2-2-HDG-12R	2"	2"	19"	7 LBS
TLHE-2-2-SS-12R	2"	2"	19"	4 LBS
TLHE-4-1-AL-12R	4"	1"	18"	3 LBS
TLHE-4-1-HDG-12R	4"	1"	18"	7 LBS
TLHE-4-1-SS-12R	4"	1"	18"	4 LBS
TLHE-4-2-AL-12R	4"	2"	19"	4 LBS
TLHE-4-2-HDG-12R	4"	2"	19"	9 LBS
TLHE-4-2-SS-12R	4"	2"	19"	5 LBS
TLHE-6-1-AL-12R	6"	1"	18"	4 LBS
TLHE-6-1-HDG-12R	6"	1"	18"	10 LBS
TLHE-6-1-SS-12R	6"	1"	18"	5 LBS
TLHE-6-2-AL-12R	6"	2"	19"	5 LBS
TLHE-6-2-HDG-12R	6"	2"	19"	11 LBS
TLHE-6-2-SS-12R	6"	2"	19"	6 LBS

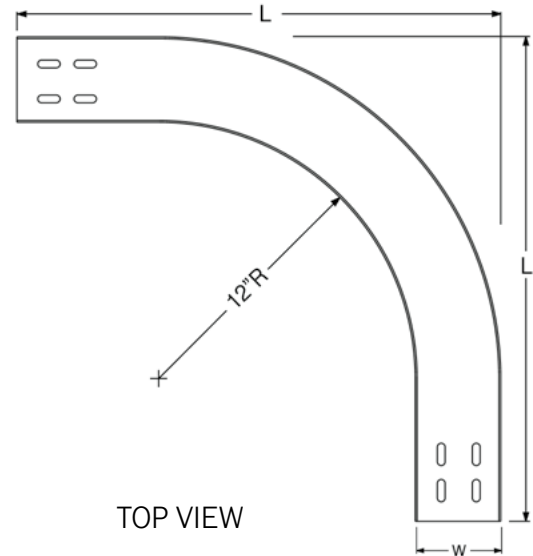

TOP VIEW



SIDE VIEW

Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)

SS: 304 Stainless Steel (16 Gauge Thickness)

HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)

6SS: 316 Stainless Steel (16 Gauge Thickness)


available on request, minimum quantities required.

Splices and hardware sold separately.


Fasteners see page 30.

*UL Labeling available upon request from factory prior to ordering.
UL Classification is only available in 2" sidewall channel and fittings.


Channel Tee 3" Radius

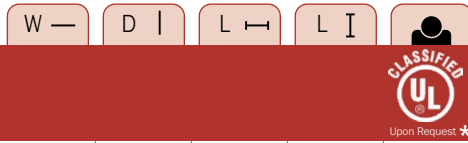

3" Radius Tee					
TLCT-2-1-AL-3R	2"	1"	17.25"	10.25"	1 LBS
TLCT-2-1-HDG-3R	2"	1"	17.25"	10.25"	3 LBS
TLCT-2-1-SS-3R	2"	1"	17.25"	10.25"	2 LBS
TLCT-2-2-AL-3R	2"	2"	17.25"	10.25"	2 LBS
TLCT-2-2-HDG-3R	2"	2"	17.25"	10.25"	5 LBS
TLCT-2-2-SS-3R	2"	2"	17.25"	10.25"	3 LBS
TLCT-4-1-AL-3R	4"	1"	19.25"	12.25"	3 LBS
TLCT-4-1-HDG-3R	4"	1"	19.25"	12.25"	5 LBS
TLCT-4-1-SS-3R	4"	1"	19.25"	12.25"	3 LBS
TLCT-4-2-AL-3R	4"	2"	19.25"	12.25"	3 LBS
TLCT-4-2-HDG-3R	4"	2"	19.25"	12.25"	6 LBS
TLCT-4-2-SS-3R	4"	2"	19.25"	12.25"	4 LBS
TLCT-6-1-AL-3R	6"	1"	21.25"	14.25"	2 LBS
TLCT-6-1-HDG-3R	6"	1"	21.25"	14.25"	6 LBS
TLCT-6-1-SS-3R	6"	1"	21.25"	14.25"	4 LBS
TLCT-6-2-AL-3R	6"	2"	21.25"	14.25"	4 LBS
TLCT-6-2-HDG-3R	6"	2"	21.25"	14.25"	8 LBS
TLCT-6-2-SS-3R	6"	2"	21.25"	14.25"	5 LBS

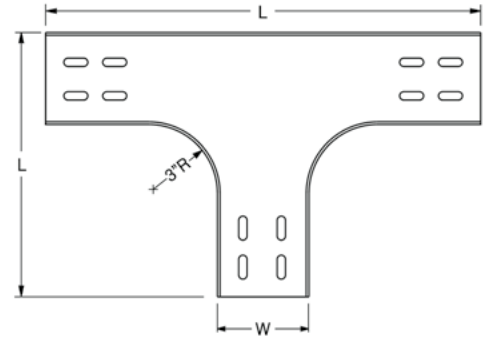

TOP VIEW



END VIEW

Slot Holes = 5/16"x1 1/4"


AL: Aluminum (12 Gauge Thickness)
 SS: 304 Stainless Steel (16 Gauge Thickness)
 HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
 6SS: 316 Stainless Steel (16 Gauge Thickness) available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.

*UL Labeling available upon request from factory prior to ordering.
 UL Classification is only available in 2" sidewall channel and fittings.

Channel Tee 12" Radius

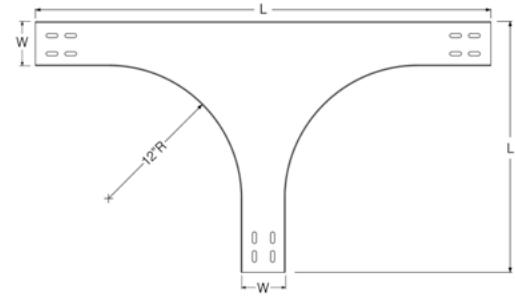

TOP VIEW



END VIEW

Long Radius Tee

12" Radius Tee					
	W	D	L	L	
TLCT-2-1-AL-12R	2"	1"	36.25"	21.25"	3 LBS
TLCT-2-1-HDG-12R	2"	1"	36.25"	21.25"	8 LBS
TLCT-2-1-SS-12R	2"	1"	36.25"	21.25"	7 LBS
TLCT-2-2-AL-12R	2"	2"	36.25"	21.25"	4 LBS
TLCT-2-2-HDG-12R	2"	2"	36.25"	21.25"	12 LBS
TLCT-2-2-SS-12R	2"	2"	36.25"	21.25"	8 LBS
TLCT-4-1-AL-12R	4"	1"	38.25"	23.25"	4 LBS
TLCT-4-1-HDG-12R	4"	1"	38.25"	23.25"	10 LBS
TLCT-4-1-SS-12R	4"	1"	38.25"	23.25"	10 LBS
TLCT-4-2-AL-12R	4"	2"	38.25"	23.25"	6 LBS
TLCT-4-2-HDG-12R	4"	2"	38.25"	23.25"	16 LBS
TLCT-4-2-SS-12R	4"	2"	38.25"	23.25"	11 LBS
TLCT-6-1-AL-12R	6"	1"	40.25"	25.25"	6 LBS
TLCT-6-1-HDG-12R	6"	1"	40.25"	25.25"	17 LBS
TLCT-6-1-SS-12R	6"	1"	40.25"	25.25"	12 LBS
TLCT-6-2-AL-12R	6"	2"	40.25"	25.25"	10 LBS
TLCT-6-2-HDG-12R	6"	2"	40.25"	25.25"	19 LBS
TLCT-6-2-SS-12R	6"	2"	40.25"	25.25"	14 LBS

○ Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
 SS: 304 Stainless Steel (16 Gauge Thickness)
 HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
 6SS: 316 Stainless Steel (16 Gauge Thickness) available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.


*UL Labeling available upon request from factory prior to ordering.
 UL Classification is only available in 2" sidewall channel and fittings.

Channel Cross 3" Radius




W — D | A — L I

3" Radius Cross					
 CLASSIFIED Upon Request ★					
TLCC-2-1-AL-3R	2"	1"	17.25"	17.25"	2 LBS
TLCC-2-1-HDG-3R	2"	1"	17.25"	17.25"	5 LBS
TLCC-2-1-SS-3R	2"	1"	17.25"	17.25"	3 LBS
TLCC-2-2-AL-3R	2"	2"	17.25"	17.25"	2 LBS
TLCC-2-2-HDG-3R	2"	2"	17.25"	17.25"	7 LBS
TLCC-2-2-SS-3R	2"	2"	17.25"	17.25"	3 LBS
TLCC-4-1-AL-3R	4"	1"	19.25"	19.25"	3 LBS
TLCC-4-1-HDG-3R	4"	1"	19.25"	19.25"	6 LBS
TLCC-4-1-SS-3R	4"	1"	19.25"	19.25"	5 LBS
TLCC-4-2-AL-3R	4"	2"	19.25"	19.25"	3 LBS
TLCC-4-2-HDG-3R	4"	2"	19.25"	19.25"	9 LBS
TLCC-4-2-SS-3R	4"	2"	19.25"	19.25"	5 LBS
TLCC-6-1-AL-3R	6"	1"	21.25"	21.25"	4 LBS
TLCC-6-1-HDG-3R	6"	1"	21.25"	21.25"	7 LBS
TLCC-6-1-SS-3R	6"	1"	21.25"	21.25"	6 LBS
TLCC-6-2-AL-3R	6"	2"	21.25"	21.25"	4 LBS
TLCC-6-2-HDG-3R	6"	2"	21.25"	21.25"	12 LBS
TLCC-6-2-SS-3R	6"	2"	21.25"	21.25"	6 LBS

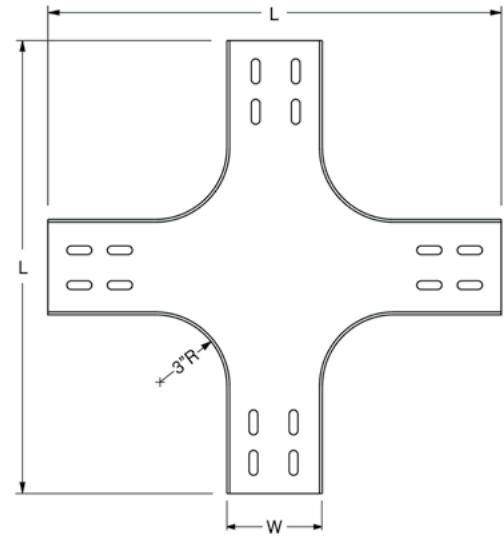

TOP VIEW



END VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)

SS: 304 Stainless Steel (16 Gauge Thickness)

HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)


6SS: 316 Stainless Steel (16 Gauge Thickness) available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.

*UL Labeling available upon request from factory prior to ordering.
 UL Classification is only available in 2" sidewall channel and fittings.

Channel Cross 12" Radius




12" Radius Cross



TLCC-2-1-AL-12R	2"	1"	36.25"	36.25"	4 LBS
TLCC-2-1-HDG-12R	2"	1"	36.25"	36.25"	10 LBS
TLCC-2-1-SS-12R	2"	1"	36.25"	36.25"	8 LBS
TLCC-2-2-AL-12R	2"	2"	36.25"	36.25"	5 LBS
TLCC-2-2-HDG-12R	2"	2"	36.25"	36.25"	13 LBS
TLCC-2-2-SS-12R	2"	2"	36.25"	36.25"	10 LBS
TLCC-4-1-AL-12R	4"	1"	38.25"	38.25"	5 LBS
TLCC-4-1-HDG-12R	4"	1"	38.25"	38.25"	12 LBS
TLCC-4-1-SS-12R	4"	1"	38.25"	38.25"	12 LBS
TLCC-4-2-AL-12R	4"	2"	38.25"	38.25"	8 LBS
TLCC-4-2-HDG-12R	4"	2"	38.25"	38.25"	18 LBS
TLCC-4-2-SS-12R	4"	2"	38.25"	38.25"	13 LBS
TLCC-6-1-AL-12R	6"	1"	40.25"	40.25"	8 LBS
TLCC-6-1-HDG-12R	6"	1"	40.25"	40.25"	19 LBS
TLCC-6-1-SS-12R	6"	1"	40.25"	40.25"	14 LBS
TLCC-6-2-AL-12R	6"	2"	40.25"	40.25"	12 LBS
TLCC-6-2-HDG-12R	6"	2"	40.25"	40.25"	21 LBS
TLCC-6-2-SS-12R	6"	2"	40.25"	40.25"	16 LBS

*UL Labeling available upon request from factory prior to ordering.
UL Classification is only available in 2" sidewall channel and fittings.

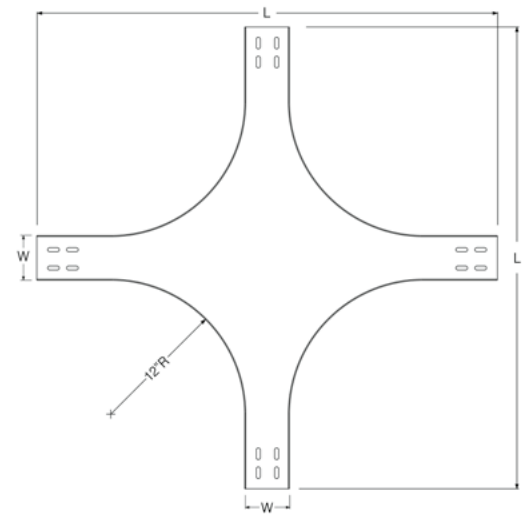

TOP VIEW



SIDE VIEW

 Slotted Holes = 5/16"x1 1/4"

AL: Aluminum (12 Gauge Thickness)
SS: 304 Stainless Steel (16 Gauge Thickness)
HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
6SS: 316 Stainless Steel (16 Gauge Thickness)
available on request, minimum quantities required.

Splices and hardware sold separately.

Fasteners see page 30.