



Flat Bar



Flat Bar			
TLF-2-AL	2"	10'	2.5 LBS
TLF-2-HDG	2"	10'	7 LBS
TLF-2-SS	2"	10'	2 LBS
TLF-3-AL	3"	10'	3.5 LBS
TLF-3-HDG	3"	10'	10 LBS
TLF-3-SS	3"	10'	3 LBS
TLF-4-AL	4"	10'	5 LBS
TLF-4-HDG	4"	10'	12 LBS
TLF-4-SS	4"	10'	4 LBS
TLF-6-AL	6"	10'	8 LBS
TLF-6-HDG	6"	10'	19 LBS
TLF-6-SS	6"	10'	6 LBS

AL: Aluminum (12 Gauge Thickness)
SS: 304 Stainless Steel (16 Gauge Thickness)
HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
6SS: 316 Stainless Steel (16 Gauge Thickness) available on request, minimum quantities required.

Splices and hardware sold separately.

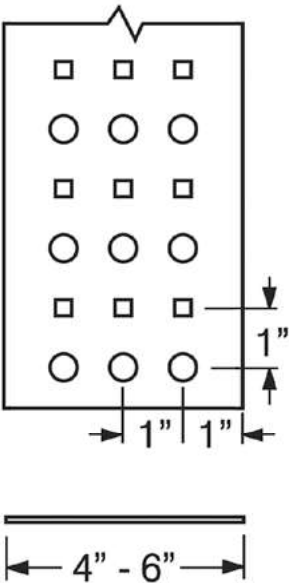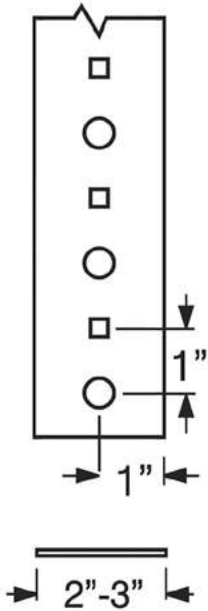

- Round Holes = 9/16"
- Square Holes = 5/16"