


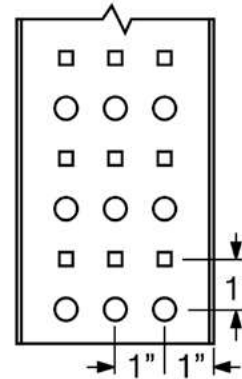


## Channel



| Channel     |    |    |     |                                    |
|-------------|----|----|-----|------------------------------------|
|             |    |    |     | CLASSIFIED<br>UL<br>Upon Request ★ |
| TLC-2-1-AL  | 2" | 1" | 20' | 8 LBS                              |
| TLC-2-2-AL  | 2" | 2" | 20' | 11 LBS                             |
| TLC-2-1-HDG | 2" | 1" | 20' | 26 LBS                             |
| TLC-2-2-HDG | 2" | 2" | 20' | 40 LBS                             |
| TLC-2-1-SS  | 2" | 1" | 20' | 14 LBS                             |
| TLC-2-2-SS  | 2" | 2" | 20' | 22 LBS                             |
| TLC-4-1-AL  | 4" | 1" | 20' | 11 LBS                             |
| TLC-4-2-AL  | 4" | 2" | 20' | 16 LBS                             |
| TLC-4-1-HDG | 4" | 1" | 20' | 36 LBS                             |
| TLC-4-2-HDG | 4" | 2" | 20' | 52 LBS                             |
| TLC-4-1-SS  | 4" | 1" | 20' | 20 LBS                             |
| TLC-4-2-SS  | 4" | 2" | 20' | 28 LBS                             |
| TLC-6-1-AL  | 6" | 1" | 20' | 16 LBS                             |
| TLC-6-2-AL  | 6" | 2" | 20' | 18 LBS                             |
| TLC-6-1-HDG | 6" | 1" | 20' | 52 LBS                             |
| TLC-6-2-HDG | 6" | 2" | 20' | 66 LBS                             |
| TLC-6-1-SS  | 6" | 1" | 20' | 28 LBS                             |
| TLC-6-2-SS  | 6" | 2" | 20' | 35 LBS                             |

\*UL labeling available upon request from factory prior to ordering.  
UL Classification is only available in 2" sidewall channel and fittings.

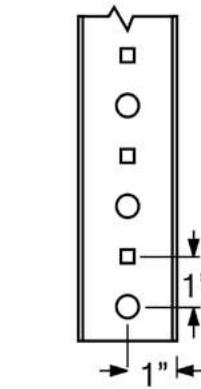

○ Round Holes = 9/16"

□ Square Holes = 5/16"

AL: Aluminum (12 Gauge Thickness)

SS: 304 Stainless Steel (16 Gauge Thickness)

HDG: Hot-Dipped Galvanized, ASTM A-123

(12 Gauge Thickness)

6SS: 316 Stainless Steel

(16 Gauge Thickness) available on request, minimum quantities required.

**Splices and hardware sold separately.**