



Angle



Angle				
TLA-2-2-AL	2"	2"	20'	8 LBS
TLA-3-3-AL	3"	3"	20'	11 LBS
TLA-2-2-HDG	2"	2"	20'	26 LBS
TLA-3-3-HDG	3"	3"	20'	36 LBS
TLA-2-2-SS	2"	2"	20'	14 LBS
TLA-3-3-SS	3"	3"	20'	19 LBS

AL: Aluminum (12 Gauge Thickness)
SS: 304 Stainless Steel (16 Gauge Thickness)
HDG: Hot-Dipped Galvanized, ASTM A-123 (12 Gauge Thickness)
6SS: 316 Stainless Steel (16 Gauge Thickness) available on request, minimum quantities required.

Splices and hardware sold separately.

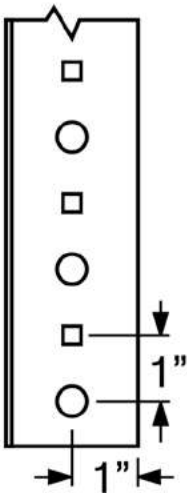

- Round Holes = 9/16"
- Square Holes = 5/16"