




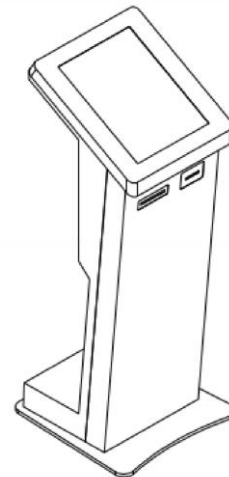

KIOSKO ACFC VZ

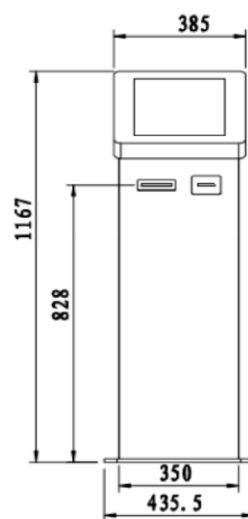

DIAGRAMAS

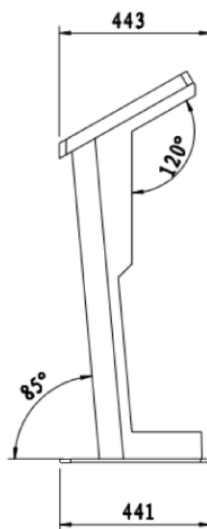

Dimensions: 1167mm (Height) X 435.5mm (Width) X 443mm (Depth) – including the bottom base

ESPECIFICACIONES TECNICAS


No.	Component	Brand / Model	Specifications	
1	PC System	LKS-PC	Mother Board	NORCO MITX-6973
			CPU	Intel i5-7500, 3.2GHZ
			RAM	Kingston KVR2400 4GB
			Storage	KingFast 256 GB Solid State Drive
			I/O Interface	●I/O chip : F81866 ●Serial ports : provide 2 serial ports, COM1COM2 are standard DB9 interfaces, support RS232 model ●USB : provide 14 USB ports, USB12 is double-layer USB3.0 interface ; USB911 is double-layer USB2.0 interface ; USB345、USB678 is triple-layer USB2.0 interface ; USB1213、USB1415 interface is 2x5PinUSB pin ●PS/2 : provide one standard double-layer PS/2 mouse interface
			Display Interface	VGA, HDMI ●VGA : 2 standard DB15 VGA interface, definition up to 1920X1200@60Hz ●HDMI : One 2x10 2.0mm HDMI pin, definition up to 2560x1600 @60Hz ; HD Graphics 530 video, Realtek PCIe GBE Family Controller Ethernet
			Power Supply	Huntkey (300W)
			Operation system	Professional Win10, 64byte
2	15inch open frame touch monitor	AUO	Diagonal	15 inch
			Type	LCD -TFT,activematrix
			Resolution	1024x768
			Brightness	300cd/m2
			Touch technology	Capacitive touch
			Touch points	multi-points

			Interface	VGA, DVI
3	Motor card reader	CRT-310	Auto card insertion/ejection	Auto insertion, card in, out or captured can be controlled
			Supporting Card Type	IC card, magnetic card and RF card read/write, the three features can be used alone or simultaneously. Magnetic Card Standard: accordance with ISO7810 ,7811; Contact IC Card Standard : ISO7816-2
			Durability	> 500,000 cycles
			Multiplied card transportation	Insert and eject the card from both front and rear side, card move in the reader, clear up the disabled card
			Approval	with international EMV LEVEL-1 approval
			Working Voltage	DC 12V ±5%
			Operation temperature	0°C—50°C
4	Fingerprint Reader	ZKTeco SLK20R	Sensor Type	Optical
			Resolution(dpi)	500
			Interface	USB 2.0, compatible with USB 1.1
			Supply voltage	5V, supplied by USB
			Finger rotation	360°
5	Receipt Printer	Option 1: SANEI SK1-31	Printing method	Thermal printing
			Wide variety of paper size	58/60/80/ 83mm
			Printing speed	Max 200mm/sec high-speed printing
			Various Sensors built-in	Paper near end, Paper empty, Head open sensor, Black-Mark sensor (Option), Gap sensor (Option)
			Autoloading function	Yes
			Interface	USB/ RS232
			Paper cut	Total / Partial
6	Power Supply	Power adaptors 110V/60HZ for printer		
7	Accessories	Ventilation fans, reset button for micro windows, 2 USB ports, audio connector, HDMI port in the back panel, locks for real caps, Cable, Screws, Bolts, Washers, Cable Ties, Switches, Vapour Corrosion Inhibitor, etc		

8	KIOSK Cabinet	LKS8354D	Dimension	final decided when finish production (with package)
			Color & Logo	Optional by customer
			Material	1.5mm thickness cold roll steel sheet. All metal parts, as well as inside and outside, should be painted with electrostatic paint and ensure that everything is painted to minimize the risk of corrosion
9	Packing	Security Packing method with bubble foam and case,		
10	Assembling & test cost and local charges of shipment			

IMÁGENES DE LOS COMPONENTES

TOUCHSCREEN DISPLAY

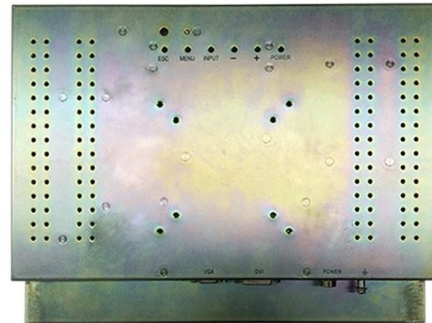

FINGERPRINT READER



SANEI PRINTER

