

HY-BRID NANO MATERIALS APPLICATION

DEUTSCHLAND MATERIALS



AL EZZ DEKHEILA STEEL - EZDK



ALEXANDRIA

**DAB
FLOW**
NANOTECHNOLOGY



DÜNN

Supply - Apply Hybrid Nano Materials for Exterior Facades And Factory Steel Structure.
Stain Remover Hy-Brid Nano Materials.
Protection Hy-Brid Nano Materials.

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

*Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.*

Surfaces :

*Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.*

Problems:

*Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.*

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %

Hardness rate : 86 %

Absorption Rate : 100 %

Est. Reaction Time : Aprox 7min.

Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :

Deutschland Hybrid Nano-Materials

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %

Hardness rate : 86 %

Absorption Rate : 100 %

Est. Reaction Time : Aprox 7min.

Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :

Deutschland Hybrid Nano-Materials



Sample Area To Be Tested With
DAB FLOW [RE-HO2]

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:


Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials



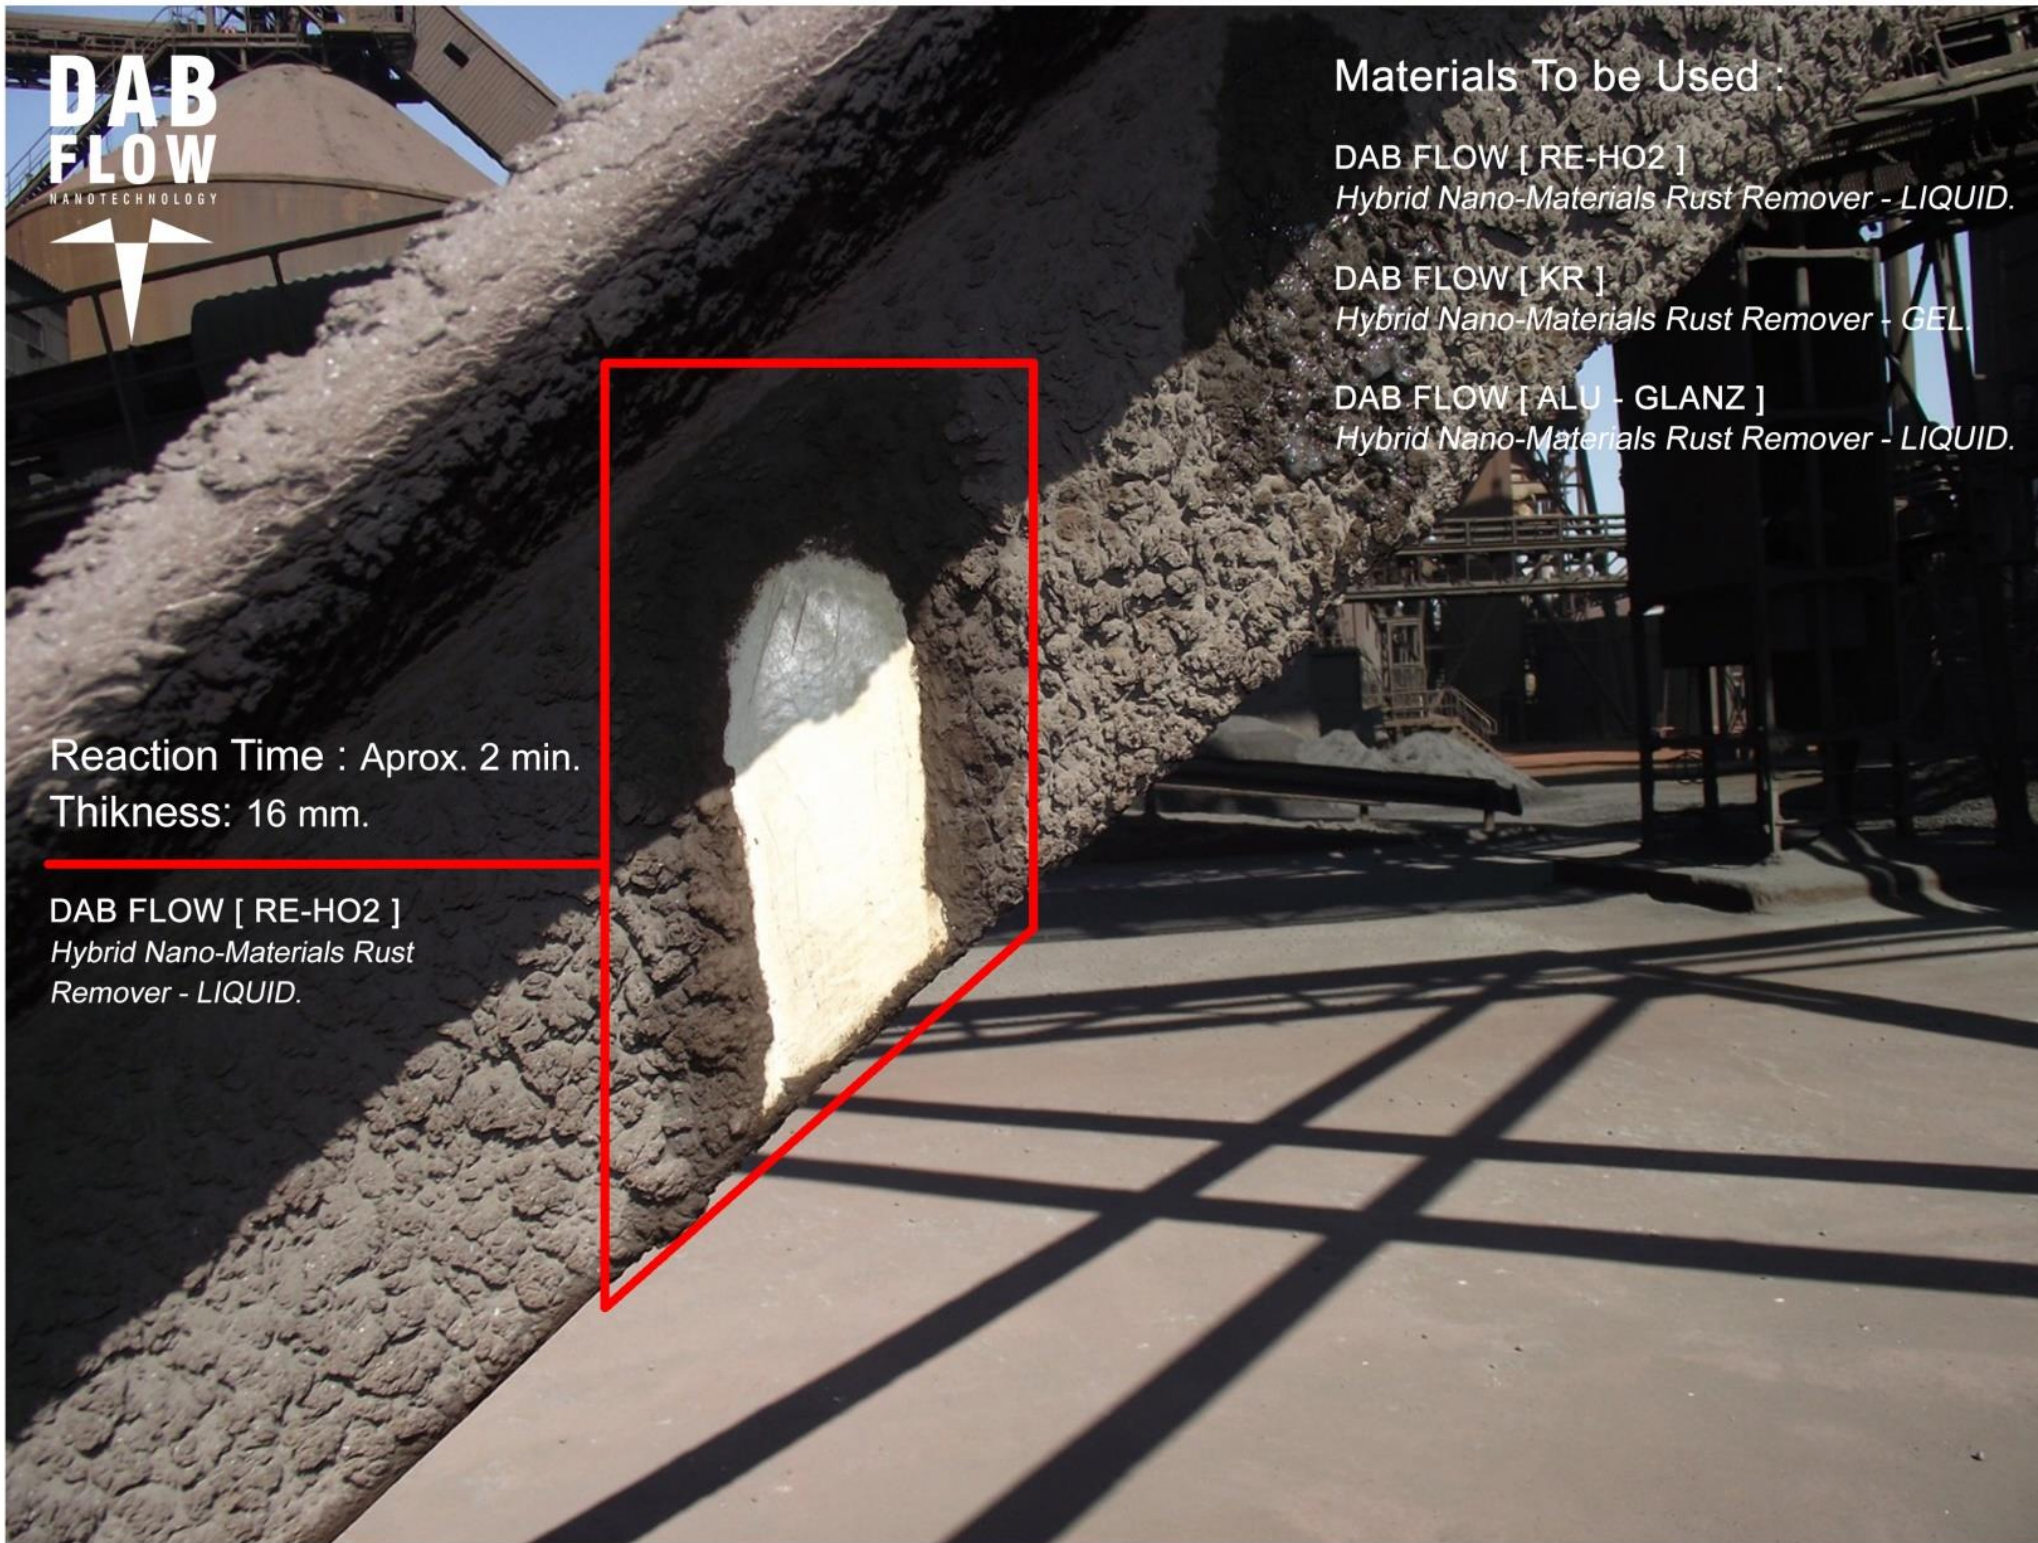

**DAB
FLOW**
NANOTECHNOLOGY

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover + GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time : Aprox. 2 min.
Thikness: 16 mm.

DAB FLOW [RE-HO2]
*Hybrid Nano-Materials Rust
Remover - LIQUID.*

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.


Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials



Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time : Aprox. 2 min.
Thikness: 16 mm.

DAB FLOW [RE-HO2]
*Hybrid Nano-Materials Rust
Remover - LIQUID.*



AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

*Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.*

Surfaces :

*Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.*

Problems:


*Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.*

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials





Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

*Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.*

Surfaces :

*Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.*

Problems:

*Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.*

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials



Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time : Aprox. 3 min.
Thickness: 18 mm.

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust
Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : Rusted Layer Removing, &
Surface Protection.

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.



Reaction Time : Aprox. 3 min.
Thikness: 18 mm.

DAB FLOW [RE-HO2]
*Hybrid Nano-Materials Rust
Remover - LIQUID.*

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

*Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.*

Surfaces :

*Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.*

Problems:

*Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.*

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %

Hardness rate : 86 %

Absorption Rate : 100 %

Est. Reaction Time : Aprox 7min.

Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :

Deutschland Hybrid Nano-Materials

**DAB
FLOW**
NANOTECHNOLOGY

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time :
Aprox. 1 min.
Thikness: 2 mm.

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust
Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : Rusted Layer Removing, &
Surface Protection.

Drought rate : 100 %
Hardness rate : 86 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 7min.
Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials

 **ezzsteel**
حديد عز

Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : *Rusted Layer Removing, &
Surface Protection.*

Drought rate : 100 %

Hardness rate : 86 %


Absorption Rate : 100 %

Est. Reaction Time : Aprox 7min.

Spreading Rate: 20 ml. / squ. in × 18 mm thickness

Materials To be Used :

Deutschland Hybrid Nano-Materials



Materials To be Used :

DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time :
Aprox. 30 Sec.
Thikness: less than 1 mm.

DAB FLOW [GBX]
Hybrid Nano-Materials Rust
Remover - LIQUID.



AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : Rusted Layer Removing, &
Surface Protection.

Drought rate : 100 %
Hardness rate : 33 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 30 Sec.
Spreading Rate: 5 ml. / squ. in × 1 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials



Materials To be Used :


DAB FLOW [RE-HO2]
Hybrid Nano-Materials Rust Remover - LIQUID.

DAB FLOW [KR]
Hybrid Nano-Materials Rust Remover - GEL.

DAB FLOW [ALU - GLANZ]
Hybrid Nano-Materials Rust Remover - LIQUID.

Reaction Time :
Aprox. 30 Sec.
Thikness: less than 1 mm.

DAB FLOW [GBX]
*Hybrid Nano-Materials Rust
Remover - LIQUID.*

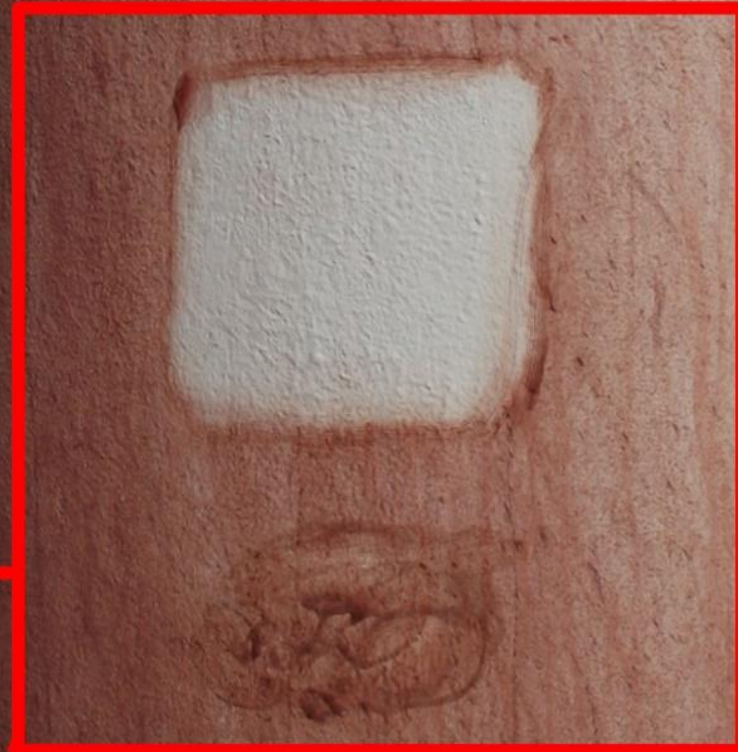

AL EZZ DEKHEILA STEEL - EZDK

Defected Areas :

Steel Beams.
Steel Girders.
Steel Pipes.
Steel Exterior Facades.
Corrugated Steel sheets.

Surfaces :

Painted Steel Surfaces.
Raw Steel Surfaces.
Galvanized Steel Surfaces.

Problems:

Wet - Dry dust.
Rusted Iron filings layer up
to 18 mm.
Composite Rusted Iron layer.

Scope Of Work : Rusted Layer Removing, &
Surface Protection.

Drought rate : 100 %
Hardness rate : 33 %
Absorption Rate : 100 %
Est. Reaction Time : Aprox 30 Sec.
Spreading Rate: 5 ml. / squ. in × 1 mm thickness

Materials To be Used :
Deutschland Hybrid Nano-Materials

AL EZZ DEKHEILA STEEL - EZDK

Materials To be used:

DAB FLOW [RE.HO2]

DAB FLOW [KR]

DAB FLOW [GBX]

Applicator:

DAB FLOW recommend DUNN - nano service company the main applicator of DAB FLOW to apply and finish the work as it has to be finished.



DÜNN
Nano Protection Service Company

DUNN- scope of work:

Supply all technician and labors during project period.
Supply all equipment & materials to finish the work as it has to be finishd.

Provide all invoices to EZZ STEEL company.

Applicate all DAB FLOW nano-materials and finish the work as it has to be.

