


# J15075 S-RACE® Active 75

## Microporous Coated Sublimation Paper

### Printability


- simplex printable



### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m <sup>2</sup>	75	± 6
Thickness	DIN EN ISO 534	µm	99	± 6
	DIN EN ISO 536	mil	3.9	± 0.25

### Printing Technology

-  Sublimation water-based systems

### Certificates

- FSC on request

### Key Applications

- Transfer on all kinds of polyester materials (soft and hard substrates)
- Especially designed for fabrics used in sportswear
- Suitable for fast and high volume printing applications
- For low to medium ink coverage

### Benefits & Properties

- Extremely fast drying
- Excellent line sharpness
- Superb and quick transfer properties
- Outstanding lay-flat performance
- Exceptional quality consistency

Version: 08/2024

Store material only in original packaging under normal climatic conditions (23°C, 50 % RH). Protect material from direct sunlight. It is recommended to adapt the material to indoor climate at least 24 hours before usage.


This is not a commercial specification, but a technical data sheet that describes the main characteristic of the making. Modifications reserved. In case of question, please contact the Felix Schoeller product management.

# J15105 S-RACE® Allround 100

## Microporous Coated Sublimation Paper

### Printability

- simplex printable



### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m <sup>2</sup>	101	± 6
Thickness	DIN EN ISO 534	µm	129	± 6
	DIN EN ISO 536	mil	5.1	± 0.25

### Printing Technology

-  Sublimation water-based systems

### Certificates

- FSC on request

### Key Applications

- Transfer on all kinds of polyester materials (soft and hard substrates)
- Designed for all kind of textile applications such as sportswear or signage.
- For medium to high ink coverage

### Benefits & Properties


- Extremely fast drying
- Excellent line sharpness
- Superb and quick transfer properties
- Outstanding lay-flat performance
- Exceptional quality consistency
- Suitable for soft and hard substrates

# J30100 S-RACE® Tacky 100

## Microporous Coated Sublimation Paper

### Printability

- simplex printable

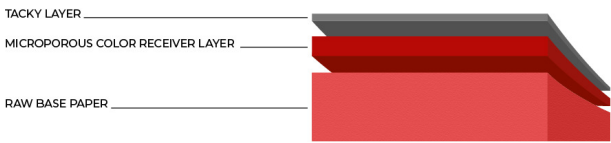

### Product Specification

Property	Test Method	Dimension	Target	Tolerance
Weight	DIN EN ISO 536	g/m²	102	± 6
Thickness	DIN EN ISO 534	µm	129	± 6
	DIN EN ISO 536	mil	5.1	± 0.25

### Printing Technology

-  Sublimation water-based systems

### Certificates

- FSC on request

### Key Applications

- Transfer on all kinds of polyester textiles
- Especially designed for elastic textiles. No movement between paper and fabric during transfer (eliminates possible ghosting effect)
- For medium to high ink coverage

### Benefits & Properties

- Optimal tack between paper and fabric during sublimation transfer (no ghosting)
- Extremely fast drying
- Excellent line sharpness
- Superb and quick transfer properties
- Outstanding lay-flat performance
- Exceptional quality consistency