



NORTHSIDE

Shop Hop

Shade Clutch



**Quilter's
Quarters**

SHADE CLUTCH

Quilter's Quarters' Shade Clutch is a compact, beginner-friendly project designed to keep your sunglasses protected and close at hand. With its shaped body, curved flap, magnetic snap, and coordinating hardware, the clutch can clip securely to a purse or travel on its own. It is the perfect little "nest" for your favorite shades, keeping them ready to take flight whenever your next adventure calls.

PROJECT AT A GLANCE

Read the pattern
completely before cutting.

Finished size: 8" × 2½" × 3½"

Seam allowance: ¼" unless otherwise noted

Skill level: Beginner

Pattern Pages: A1 and A2 (join together); B, C, and D

SUPPLIES

Available in a Kit at Quilter's Quarters

ITEM	SIZE / AMOUNT
Fabric 1 (Main/body)	16" x 16"
Fabric 2 (Coordinating/flap)	10" x 4"
Fabric 3 (Coordinating/accents)	16" x 10"
Fusible fleece	
Pellon SF101 or comparable woven fusible interfacing	
½-inch D-ring	1
Swivel hook	1
Magnetic snap	1 set

Additional Supplies

- Basic sewing supplies: machine, rotary cutter, ruler, and mat, pins or fabric clips
- Coordinating thread
- Fabric marker or chalk
- Iron and pressing surface

CUTTING GUIDE

TEMPLATE PIECE	CUT	INTERFACING
A - Body (join A1 + A2)	1 main fabric; 1 coordinating fabric	1 fusible fleece; 1 SF101, traced at dashed line
B - Flap	1 coordinating fabric; 1 lining	1 fusible fleece; 1 SF101, traced at dashed line
C - D-ring	1 coordinating fabric	
D - D-swivel	1 coordinating fabric	

INTERFACING Trace the fusible fleece and SF101 along the dashed lines on Pieces A and B. Keep both products out of the seam allowance.

ASSEMBLE THE PAPER PATTERN

1. **Print the three template** pages at 100% or Actual Size. Do not select Fit to Page.
2. **Measure each 1-inch reference** square before cutting fabric.
3. **Trim or overlap the joining edges** of A1 and A2, align the center edges and registration notches, and tape the pages together.
4. **Cut on the solid outer lines.** Dashed lines indicate the fleece and SF101 placement.

PREPARE THE FLAP

1. **Fuse the structure.** Fuse the fusible fleece and SF101 to the wrong side of the main-fabric Piece A and the outer flap fabric, following the manufacturers' directions. Keep the products inside the dashed placement lines and out of the seam allowances.
2. **Sew the flap.** Place the main flap fabric and flap lining right sides together. Stitch with a ¼-inch seam allowance, leaving the straight edge open for turning and attachment. Install the female portion of the magnetic snap. Be sure not to sew the unfinished edge shut when topstitching the flap.
3. **Trim, turn, and topstitch.** Trim the seam allowance to ⅛ inch and clip notches along the curves without cutting the stitching. Turn right side out, press, and topstitch ⅛ inch from the finished edge.
4. **Fold the hardware pieces.** Fold each piece (C & D) in half lengthwise and press. Fold the long raw edges toward the center, fold closed again and stitch each long side ⅛ inch from the edge. Backstitch securely.

5. Add the D-ring. Slide the ½-inch D-ring onto its assigned tab. Fold the tab around the straight side of the ring and stitch across it several times to secure the hardware.

6. Add the swivel hook. On the assigned piece, fold one short end under ½ inch and then another ½ inch to conceal the raw edge. Place the swivel hook on the folded end and stitch across several times to secure it.

SECURE THESE SEAMS The hardware tabs carry stress. Backstitch and sew across each attachment line more than once.

ASSEMBLE THE BODY

7. Mark Piece A. Place the main-fabric Piece A right side up. Mark 2 inches in from each top edge, then mark the center along the top edge.

8. Attach the hardware tabs. Place the swivel-hook piece at the left 2-inch mark and the D-ring piece at the right 2-inch mark. Stitch back and forth across each tab to secure it.

9. Attach the flap. Find the center of the flap and align it with the center mark on Piece A. Stitch the flap in place.

10. Join the body layers. Place the prepared main-fabric Piece A and coordinating-fabric Piece A right sides together. Sew around the perimeter, leaving an opening of approximately 3 inches for turning and snap placement.

11. Install the male snap half. Transfer the magnetic-snap placement mark from the pattern to the main fabric of Piece A. Install the male half of the magnetic snap according to the manufacturer's directions.

SHAPE & FINISH THE CLUTCH

12. Clip, turn, and press. Clip the outside corners and carefully snip into the inside corners. Do not cut through the stitching. Turn right side out, shape the corners, press well, and topstitch the turning opening closed.

13. Form the upper sides. Fold the left flap of Piece A onto the upper-left side of the body. Repeat on the right side. Topstitch the folded sections in place.

14. Form the lower sides. Bring the lower-left side up to meet the corresponding upper flap. Repeat on the right side. Topstitch the joined sections, backstitching securely.

FINISH Remove visible markings, trim loose threads, press once more, and test the snap and hardware.

Your Shade Clutch is complete! Beautiful work!



PRINTING THE TEMPLATES

The following pages reproduce the supplied templates at full size. Print at 100% or Actual Size, then verify the 1-inch reference square before using any pattern piece.

IMPORTANT If the reference square does not measure exactly 1 inch, check the printer's scaling settings and print again.




AI



Magnetic Snap Placement

Tape A1 and A2 Together

1" Reference

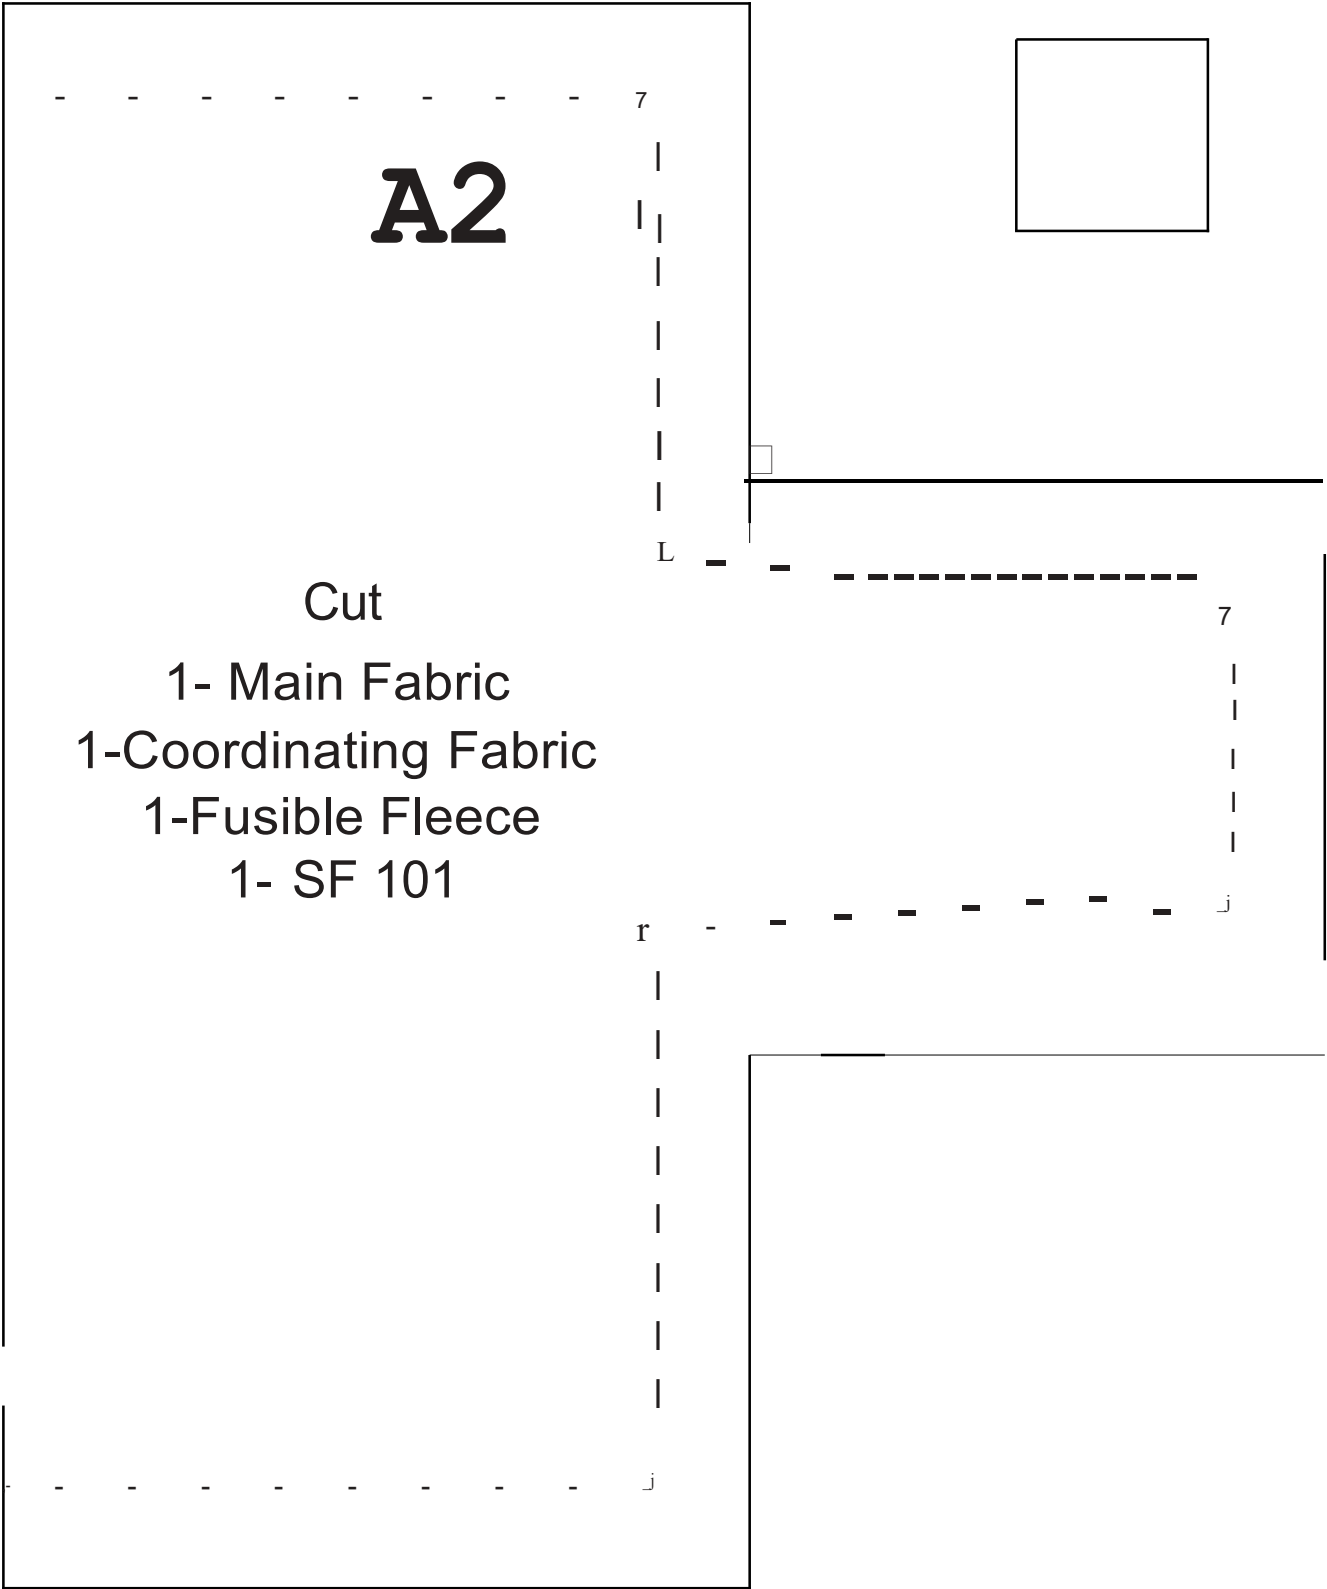

1" Reference

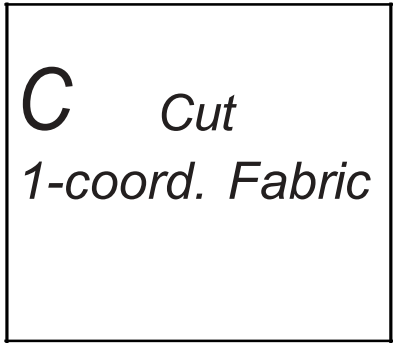

B

Cut

1- Coordinating Fabric

1-Lining Fabric

1-Fusible Fleece (dashed Line)

1- SF101 (Dashed Line)

○ Magnetic Snap Placement



D

Cut

1- Coordinating Fabric

