


DeckBox MD Ply

Profiled inserts are tek screwed in alignment with the setting out marks for the opening. The fabricated box is tek screwed to the returns on the inserts. Finally, blanking plates are fitted to the open sides. The box can be manufactured to any dimension and provides a quick and effective solution for creating holes in the finished floor, helping to avoid the cost and administration of post pour core drilling.

Manufacture: DeckBox MD frames are galvanised mild steel of European Standard EN10142:2000, coated with zinc by hot-dip processes (Galvatite Z), including iron-zinc alloy (Galvatite ZF). The hot-dip coatings may contain up to 0.002% lead or up to 0.12% antimony. Lids and any support inserts vware 18mm structural plywood. Datasheets for steel and ply are available on request and from the website.


Personal Protection: Suitable protective clothing covering all exposed body parts should be worn. Equipment, such as safety spectacles, and cut-resistant gloves, should be worn when handling the metal frames.
First Aid: Steel frame skin and eye contact: Possible cuts from steel edges. Treat as other cuts; if required, seek medical attention.

FSC chain of custody certificate No: INT-COC-003944.501

 Please allow ±1mm tolerance



Trough Inserts

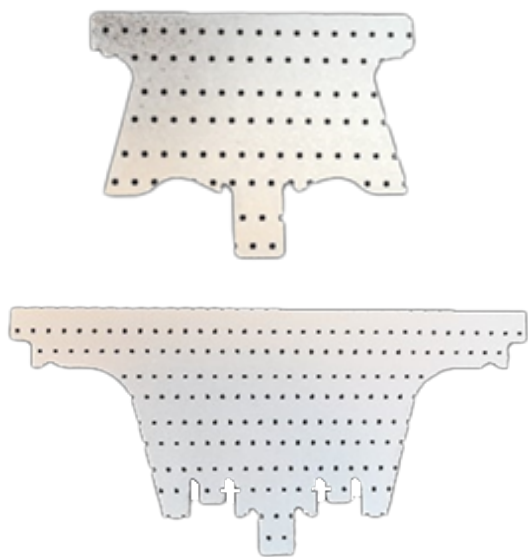

CMF	Kingspan Multideck
MF55	MD50
MF60	MD60
MF80	MD80
Tata ComFlor	MD146
CF51	SMD Floor Deck
CF60	R51+
CF80	TR60+
CF100	TR80
CF210	TR220