




# SUPER Z AND HYPERDRIVE

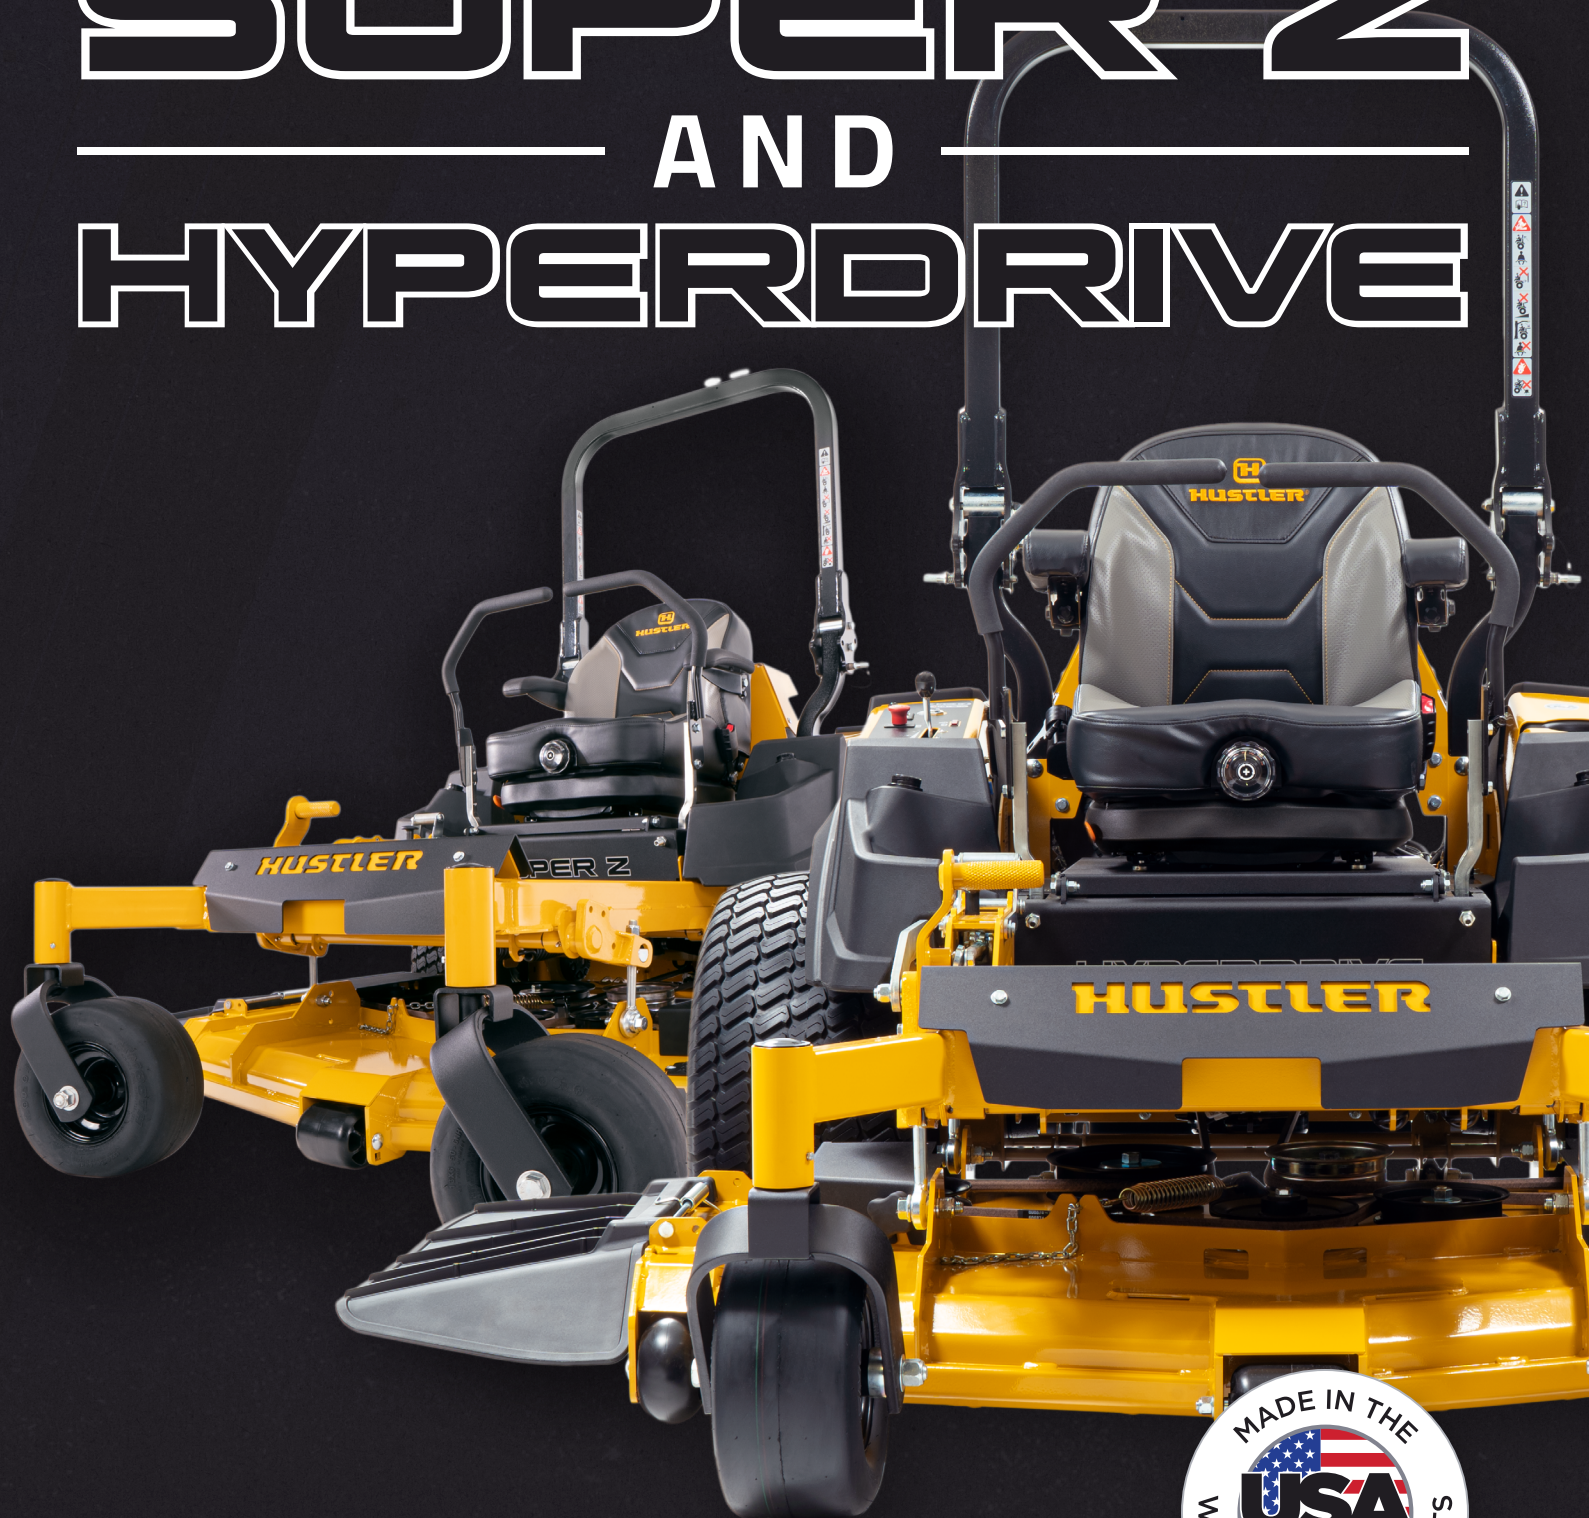

COMMERCIAL

# SUPER Z



## HEAVY-DUTY HYDRAULICS

With 3 GAL oil reservoir, oil cooler, w/fan & hot oil shuttle.

## FOOT OPERATED DECK LIFT

Easily adjust your cutting height from 1.5" to 5.5" with your foot.

## EASY SERVICEABILITY

Flip-up seat pan, removable floor pan, and vented pulley covers for easy and simple maintenance.

## VX4® DECK

Fabricated 7 GA steel deck engineered to help move grass at high speed while maintaining cut-quality.

## SMOOTHTRAK™ STEERING

Precision control to help trim and maneuver easily around obstacles.

## LARGE FUEL CAPACITY

7 GA deck plate with 7 GA stamped spindle mounts and 11 GA bull nose leading edge.

## I3M™ SUSPENSION SEAT

High-back seat with adjustable armrests and 3-inch travel range.

## COMMERCIAL-GRADE TORQUE

Hydro-Gear 21 cc PY pumps and Parker TG wheel motor.



## SUPER Z

| DECK SIZE / ENGINE |          |                      |
|--------------------|----------|----------------------|
| 54"                | 27 HP*   | Kawasaki® FX850      |
| 60"                | 27 HP*   | Kawasaki® FX850      |
| 60"                | 35 HP*   | Kawasaki® FX1000     |
| 60" RD             | 35 HP*   | Kawasaki® FX1000     |
| 60"                | 38.5 HP* | Kawasaki® FX1000 EFI |
| 72"                | 35 HP*   | Kawasaki® FX1000     |
| 72" RD             | 35 HP*   | Kawasaki® FX1000     |
| 72"                | 38.5 HP* | Kawasaki® FX1000 EFI |

## HYPERDRIVE

| DECK SIZE / ENGINE |          |                        |
|--------------------|----------|------------------------|
| 60"                | 35 HP*   | Kawasaki® FX1000       |
| 60"                | 40 HP*   | Vanguard® BigBlock EFI |
| 60" RD             | 38.5 HP* | Kawasaki® FX1000 EFI   |
| 72"                | 35 HP*   | Kawasaki® FX1000       |
| 72"                | 38.5 HP* | Kawasaki® FX1000 EFI   |
| 72" RD             | 38.5 HP* | Kawasaki® FX1000 EFI   |
| 72"                | 40 HP*   | Vanguard® BigBlock®    |

# UPGRADES FOUND ON THE HYPERDRIVE



**HYPERDRIVE® HYDRO SYSTEM**



**OPTIONAL VANGUARD BIGBLOCK  
ENGINE W/ OIL GUARD**



**DANFOSS® DDC-20 PUMPS**

## HYPERDRIVE® SYSTEM

Reducing the temperature of the oil in your wheel motors is a key to extending the life of your hydraulic system. Hustler's exclusive HyperDrive® system helps do just that with temperature regulation and heavy-duty components designed to keep your mower at peak performance.


## INDUSTRY'S BEST WARRANTY



**9" Fan & High-Capacity Oil Cooler  
with Hot Oil Shuttle**



**Large Oil Reservoir**

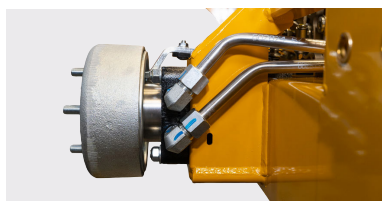

**Parker TG280® Wheel Motors**



**Industrial-Grade Slipper  
Piston Pumps**

## ACCESSORIES

(Each sold separately)

- Steering extension kit
- Electric deck lift
- Rear hitch kit
- Anti-scalp deck rear wheels
- BacVac bagger
- Semi pneumatic front tire
- 3-bag powered bagger (12 bushels)
- Flex Forks®
- Mulch kit
- Light kit
- Sand kit
- Stripe kit
- Beacon kit
- Flasher kit
- Michelin® X® Tweel® Turf
- Michelin® X® Tweel® Caster



# SUPER Z®

# HYPERDRIVE®

| ENGINE              |                                                                                                                                                                                                             |                                                                                                                                                                |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Manufacturer        | Vanguard® Big Block™, Kawasaki® FX series                                                                                                                                                                   |                                                                                                                                                                |
| HP                  | 54” & 60” deck: 27 HP* — FX850<br>60”, 60”RD, 72”, & 72”RD deck: 35 HP* — FX1000 60” & 72” deck: 40 HP* — Big Block EFI w/ Oil Guard 60” & 72” deck: 40 HP* — Big Block EFI w/ Oil Guard<br>(Per SAE J1995) | 60” & 72” deck: 35 HP* — FX1000<br>60” & 72” deck: 40 HP* — BigBlock EFI w/ Oil Guard 60”, 60” RD, 72” & 72” RD deck: 38.6 HP* — FX1000 EFI<br>(Per SAI J1995) |
| Displacement        | FX850: 852 cc • FX1000: 999 cc • FX1000 EFI: 999 cc • Vanguard: 993 cc                                                                                                                                      |                                                                                                                                                                |
| Cooling             | Air cooled                                                                                                                                                                                                  |                                                                                                                                                                |
| Air Cleaner         | Canister style                                                                                                                                                                                              |                                                                                                                                                                |
| Engine Warranty     | 3 year limited                                                                                                                                                                                              |                                                                                                                                                                |
| DRIVE SYSTEM        |                                                                                                                                                                                                             |                                                                                                                                                                |
| Type                | Dual hydrostatic                                                                                                                                                                                            |                                                                                                                                                                |
| Pumps               | Hydro-Gear® 21 cc PY                                                                                                                                                                                        | Danfoss® DDC-20                                                                                                                                                |
| Wheel Motors        | Parker TG                                                                                                                                                                                                   | Parker® TG                                                                                                                                                     |
| Hydraulic Lines     | Stainless Parker® Seal-Loc Technolog                                                                                                                                                                        |                                                                                                                                                                |
| Reservoir Capacity  | 3 gallons                                                                                                                                                                                                   |                                                                                                                                                                |
| Speed               | Up to 14 MPH                                                                                                                                                                                                | Up to 16 MPH                                                                                                                                                   |
| Parking Brakes      | Integrated with steering levers                                                                                                                                                                             |                                                                                                                                                                |
| DECKS               |                                                                                                                                                                                                             |                                                                                                                                                                |
| Cutting Width       | Side discharge: 54”, 60”, 72” • Rear-discharge: 60”, 72”                                                                                                                                                    | Side discharge: 60”, 72” • Rear discharge: 60”, 72”                                                                                                            |
| Cutting Heights     | 1”–5.5”                                                                                                                                                                                                     |                                                                                                                                                                |
| Deck Lifts          | Foot operated                                                                                                                                                                                               |                                                                                                                                                                |
| Depth               | 5.5”                                                                                                                                                                                                        |                                                                                                                                                                |
| Blades              | 3                                                                                                                                                                                                           |                                                                                                                                                                |
| Blade Length        | 54” deck: 18.50” • 60” deck: 20.50”<br>72” deck: 24.50”                                                                                                                                                     | 60” deck: 20.50”<br>72” deck: 24.50”                                                                                                                           |
| Blade Tip Speed     | 54” 18,300 • 60”: 18,600 • 72”: 18,500                                                                                                                                                                      | 60”: 18,600 • 72”: 18,500 • 72” RD: 18,500                                                                                                                     |
| Spindles            | Ductile cast iron with steel shaft and sealed ball bearings                                                                                                                                                 |                                                                                                                                                                |
| Drive               | Electric PTO clutch                                                                                                                                                                                         |                                                                                                                                                                |
| Construction        | Fabricated 7 GA                                                                                                                                                                                             |                                                                                                                                                                |
| Spindle Mounts      | Reinforced 7 GA stamped disc                                                                                                                                                                                |                                                                                                                                                                |
| Impact/Trim Areas   | Front of deck: 11 GA formed bump bar • Side of deck: 1.5” x .375” steel bar                                                                                                                                 |                                                                                                                                                                |
| CONSTRUCTION        |                                                                                                                                                                                                             |                                                                                                                                                                |
| Frame               | 1.5” x 3” steel tubing                                                                                                                                                                                      |                                                                                                                                                                |
| Front Axle          | Fabricated with tapered roller bearings                                                                                                                                                                     |                                                                                                                                                                |
| Front Caster Wheels | Tapered wheel bearings and debris cap                                                                                                                                                                       |                                                                                                                                                                |
| Front Caster Forks  | Fabricated 1/2” steel                                                                                                                                                                                       |                                                                                                                                                                |
| GENERAL             |                                                                                                                                                                                                             |                                                                                                                                                                |
| Seat                | 13M suspension seat                                                                                                                                                                                         |                                                                                                                                                                |
| Fuel Capacity       | Dual Fuel Tank w/ 12 gallon total capacity                                                                                                                                                                  |                                                                                                                                                                |
| Cupholder           | Yes                                                                                                                                                                                                         |                                                                                                                                                                |
| Front Tire          | 13 x 6.5–6                                                                                                                                                                                                  |                                                                                                                                                                |
| Drive Tire          | 54” 26 x 9.5–12 • 60”, 72”: 26 x 12–12                                                                                                                                                                      | 60”, 72”: 26 x 14–12 • 60” & 72” RD: 26 x 12–12                                                                                                                |
| DIMENSIONS          |                                                                                                                                                                                                             |                                                                                                                                                                |
| Weight              | 54”: 1522 LBS • 60”: 1553–1637 LBS • 60” RD: 1664 LBS<br>72”: 1641–1659 LBS • 72” RD: 1731 LBS                                                                                                              | 60”: 1619–1682 LBS • 60” RD: 1727 LBS<br>72”: 1686–1750 lbs • 72” RD: 1794 LBS                                                                                 |
| Height              | 47.8” • 73.5 w / ROPs                                                                                                                                                                                       |                                                                                                                                                                |
| Length              | 54”, 60”: 88” • 60” RD, 72”, 72” RD: 92”                                                                                                                                                                    |                                                                                                                                                                |
| Width w/ Chute Up   | 54”: 60” • 60”: 66” • 60” RD: 64” • 72”: 78” • 72” RD: 73.3”                                                                                                                                                |                                                                                                                                                                |
| Tire Width          | 54”: 53” • 60”, 60” RD: 64” • 72” • 72”: 78” • 72” RD: 73.3”                                                                                                                                                |                                                                                                                                                                |
| Trim Side           | 54”: 2.4” • 60”: 3.4” • 60” RD: 3.1” • 72”: 8.9” • 72” RD: 6.6”                                                                                                                                             |                                                                                                                                                                |
| PRODUCTIVITY**      |                                                                                                                                                                                                             |                                                                                                                                                                |
| Acres Per Hour      | 54”: 6.11 • 60”: 6.78 • 72”: 8.14                                                                                                                                                                           | 60”: 7.76 • 72”: 9.31                                                                                                                                          |

Specifications are subject to change without notice.

\* As rated by the engine manufacturer.

\*\* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning, and terrain.

Kawasaki is a registered trademark owned by KAWASAKI JUKŌGYŌ KABUSHIKI-KAISHA. Kohler and command Pro are registered trademarks owned by Kohler Co.

Vanguard is a registered trademark owned by Briggs & Stratton Corporation. Hydro-Gear and ZT-4400 are registered trademarks owned by Hydro-Gear Limited Partnership.

Michelin, X, and Tweel are registered trademarks owned by COMPAGNIE GENERALE DES ETABLISSEMENTS MICHELIN.