



SUPER 104



COMMERCIAL

SUPER 104



FABRICATED FRAME FOR DURABILITY

1.5" x 3.0" steel single piece frame

FRONT CASTOR FLEX-FORKS®

Reduces vibration to the wings.

RUBBER FLOOR MAT

Helps provide operator comfort.

HYDRAULIC DECK HEIGHT ADJUSTMENT

Raising and lowering your cutting height has never been easier.

SMOOTHTRAK STEERING

Developed over decades of experience. Precision control designed to help trim and maneuver easily around obstacles.

HYDRAULIC WINGS

Easily raise and lower wings for compact transportation.

I4M SUSPENSION SEAT

NEW High-back seat with adjustable armrests and 4-inches of travel.

NEW CLUTCH


Increases from 250 LB-FT to 275 LB-FT.

HYPERDRIVE® HYDRO SYSTEM

Features industrial-grade pumps and motors to handle tough jobs and long days.

DECK SIZES / ENGINE

104"	38.5 HP*	Kawasaki® FX1000 EFI
104"	40 HP*	Vanguard Big Block EFI w/ Oil Guard

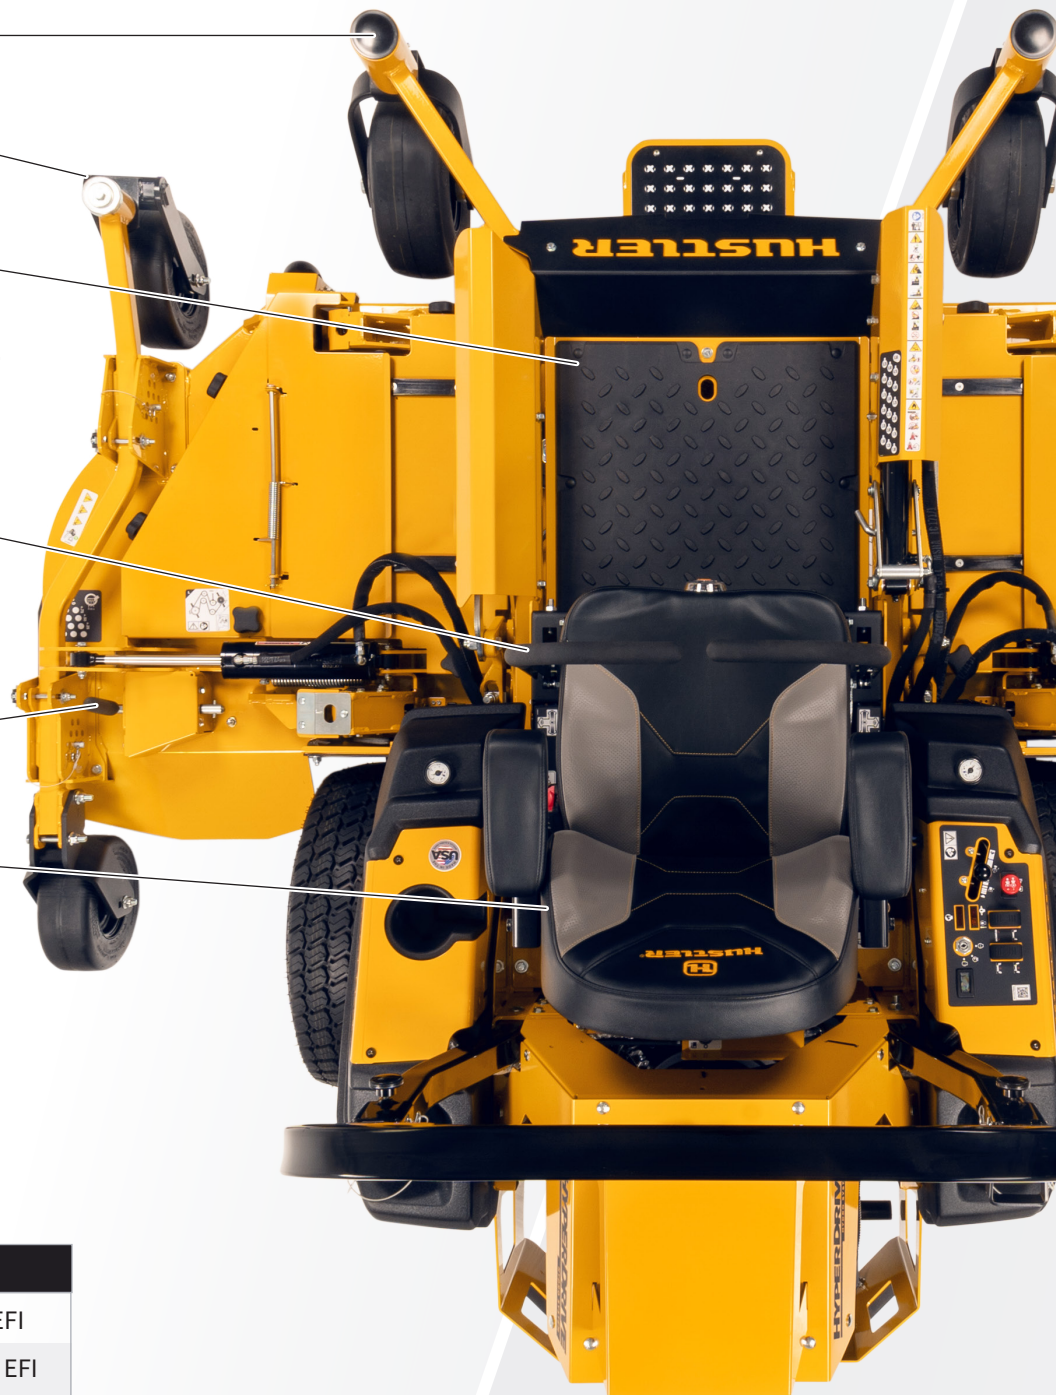

MORE FEATURES



**80" TRANSPORT WIDTH
TO FIT MOST TRAILERS**



HYPERDRIVE HYDRAULIC SYSTEM



**NEW ENGINE GUARD TO
INCREASE AIRFLOW**

**MOW A FOOTBALL FIELD IN
LESS THAN 10 MINUTES**

ACCESSORIES

(Each sold separately)

- Mulch kit
- Steering lever extension kit
- Light kit
- Anti-scalp kit
- Flasher kit
- Beacon kit
- Front Castor Flex-Forks®
- Hitch kit
- Michelin X-Tweel Turf Tire
- Semi-pneumatic wheel/tire
15 x 6 Black



SUPER 104

ENGINE	
Manufacturer	Vanguard, Kawasaki FX series
HP	38.5 HP - Kawasaki FX1000 EFI 40 hp - Vanguard BIG BLOCK™ EFI w/ Oil Guard (Per SAE J1995)
Displacement	Vanguard 993 cc, 999 cc Kawasaki
Cooling	Air Cooled
Air Cleaner	Heavy Duty Canister
Engine Warranty	3 year Vanguard • 3 year Kawasaki
DRIVE SYSTEM	
Type	Dual hydrostatic
Pumps	Danfoss DDC20
Wheel Motors	Parker TG
Hydraulic Lines	Stainless steel Parker Seal-Lok technology
Reservoir Capacity	3 gallons
Speed	Up to 11 MPH
Parking Breaks	Integrated with steering levers
DECKS	
Cutting Width	Rear-discharge: 104"
Cutting Heights	1"–5.5"
Deck Lift	Hydraulic powered
Depth	5.5"
Blades	5
Blade Length	1 - 23.86" CW • 1 - 23.86" CCW • 1 - 20.50" CCW • 2 - 20.50" CW
Blade Tip Speed	Wing Decks: 15,800 • Center Deck: 15,500
Spindles	Ductile cast iron with steel shafts and sealed ball bearings
Drive	Electric PTO clutch
Construction	11 GA welded steel
Spindle Mounts	Reinforced 7 GA doubler
Impact/Trim Areas	1.5" x .375" steel bar
CONSTRUCTION	
Frame	1.5" x 3" steel tubing
Front Axle	Fabricated with tapered roller bearings
Front Caster Wheels	Tapered wheel bearings and debris cap
Front Caster Forks	Fabricated 1/2" steel
GENERAL	
Seat	I4M suspension seat, adjustable armrests and back
Fuel Capacity	15 gallons
Cupholder	Yes
Front Tire	15 x 6.0–6
Drive Tire	26 x 12–12
Wing Tire	11 x 4 semi-pneumatic
DIMENSIONS	
Weight	2500 LBS
Height	54", 71.5" w/ Rops
Length	95.5"
Width w/Chute Up	106.1" wings down, 80" wings up at gauge wheels, 72.5" wings up at deck base
Tire Width	60.3"
Trim Side	23.2"
PRODUCTIVITY*	
Acres Per Hour	9.24

Specifications are subject to change without notice.

* Number based on 80% efficiency. This rating is to account for actual mowing conditions including overlapping, turning and terrain.

** Specifications are subject to change without notice.