



WL60

Wheel loader

High productivity and ideal comfort

The WL 60 wheel loader offers an extremely comfortable cab and a wide variety of options. The operating philosophy is designed for ergonomics. Everything is well within the operator's reach, which ensures fatigue-free work even over a longer period of time. The high flow load-sensing performance hydraulics with 39.63 US gpm flow rate is the strongest in the 13 000 lb class, also ensuring more operating comfort and less fuel consumption by the machine.



Highlights

- {30/40 km/h}{18.64/24.85 mph} speed
- The wheel loader as an attachment carrier
- Clear 3.5-inch digital display
- Comfortable working environment
- Joystick console spring-mounted on the operator's seat

Technical Data

■ Hydraulic

Operating pressure	3,045.0 psi
Flow rate	26.4 gal/mi
Tank capacity	25.1 gal US

■ Mechanical - Output Details

Travel speed	12.4 m/H
Travel speed stage 1	0.0 - 4.3 m/H
Travel speed stage 2	0.0 - 12.4 m/H
Travel speed (Option)	24.8 m/H

■ Mechanical Details

Operating weight	13,007.3 lb
------------------	-------------

Bucket capacity	35.31 ft ³
-----------------	-----------------------

■ Environment Data

Sound level LpA	75.0 dB(A)
-----------------	------------


■ Operating Fluids

Hydraulic fluid volume	132.1 qt US
Tank capacity AdBlue® / DEF	40.2 pt US
Fuel Tank capacity	27.7 gal US

■ Chassis

Operating pressure	6,597.5 psi
Flow rate	41.2 gal/mi

Dimensions

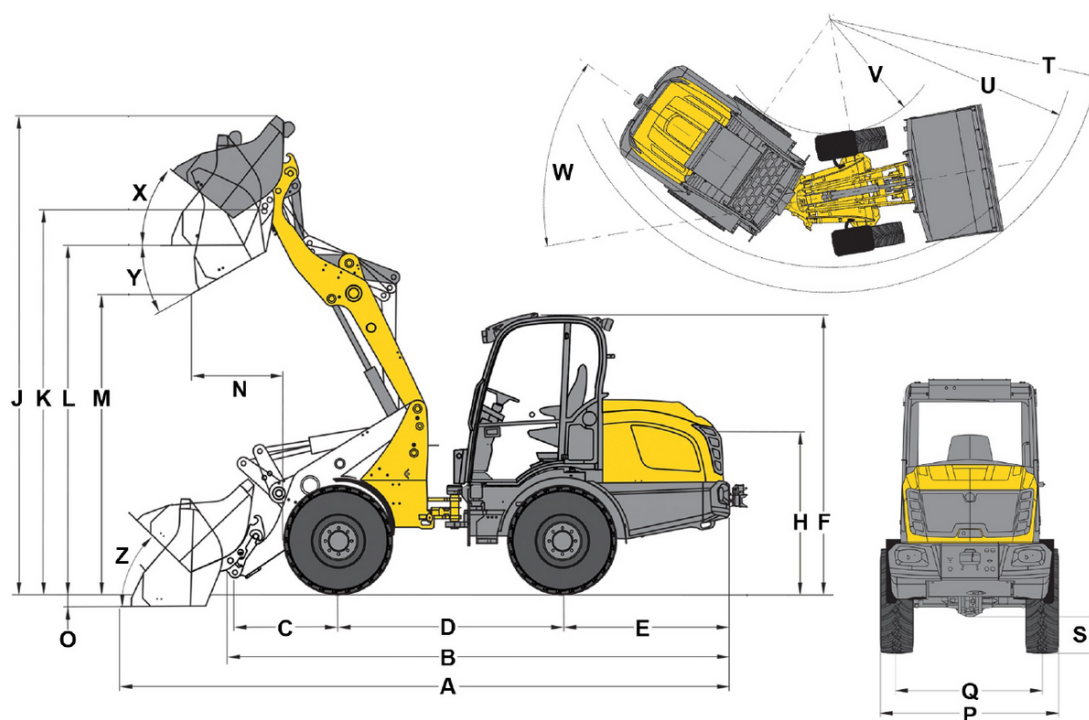

A	Total length	232.2 in
B	Total length without bucket	188.2 in
C	Bucket pivot point (to center of axle)	39.0 in
D	Wheel base	84.6 in
E	Rear overhang	66.0 in
F	Height with cab	106.0 in
H	Seat height	63.3 in
J	Total working height	173.6 in
K	Bucket pivot point (max. lift height)	145.1 in
L	Load-over height	132.9 in
M	Dumping height	111.9 in
N	Reach (at M)	11.4 in
O	Digging depth	2.9 in
P	Total width	72.0 in
Q	Track width	56.0 in
S	Ground clearance	14.8 in
T	Maximum radius	160.3 in
U	Radius on the outer edge	145.1 in
V	Inner radius	65.6 in
W	Articulation angle	42 °
X	Rollback angle at max. lift height	33 °
Y	Dumping angle	33 °
Z	Rollback angle on ground	39 °