

# Universal

SERIES

*Built for strength.  
Built to last.*

**1<sup>ST</sup>**  
**UDT** 1<sup>ST</sup> UNITED DOOR  
TECHNOLOGIES



*Universal Model 224 with Optional Glass Top*

# MODEL 225 SP/LP




Model 225 Short Panel

Long Panel


The cost effective Model 225 offers exceptional value. The exterior of the door is embossed with a woodgrain texture finish accented by an elegant raised panel design. The door is composed of 25 gauge (.019) hot dipped galvanized steel with baked-on polyester paint and reinforced rail for strength and safety.

- ▲ True 25 Gauge woodgrain textured steel
- ▲ Unique sculpted panel design
- ▲ Short and Long panel
- ▲ True 2" section thickness
- ▲ Tongue and groove section rail
- ▲ Doors pre-painted white, almond, sandstone or brown
- ▲ 18" and 21" section heights
- ▲ All 21" sections include shadow groove
- ▲ Upgraded industry Hardware packs available
- ▲ Optional CFC free Polystyrene insulation with a rigid vinyl backskin. Calculated *R-Value* 6.25
- ▲ Limited *Lifetime* warranty
- ▲ Heavy gauge galvanized stiles
- ▲ *Exclusive RITS™* "Reinforced Integral Truss System" Design
- ▲ Window options available

Color Options



# MODEL 224 SP/LP/FL

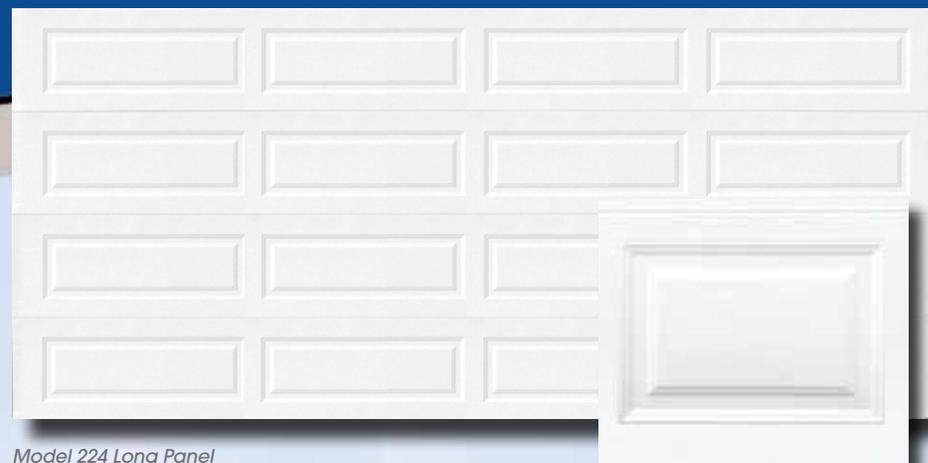


Model 224 Long Panel

Short Panel

For strength and longevity, the Model 224 utilizes heavy 24-gauge steel without sacrificing beauty. The exterior of the door is embossed with a woodgrain texture finish accented by a raised panel design. The door is composed of 24 gauge (.023) hot dipped galvanized steel with baked-on polyester paint and reinforced rail for strength and safety.

- ▲ True 24 Gauge woodgrain textured steel
- ▲ Unique sculpted panel design
- ▲ Short, Long panel and Flush available
- ▲ 2" Section thickness
- ▲ Tongue and groove section rail
- ▲ Doors pre-painted white or almond (18" almond - 25 gauge only)
- ▲ 18" and 21" section heights
- ▲ Upgraded industry Hardware packs available
- ▲ Optional CFC free Polystyrene insulation with a rigid vinyl backskin. Calculated *R-Value* 6.25
- ▲ Limited *Lifetime* warranty
- ▲ Heavy gauge galvanized stiles
- ▲ *Exclusive RITS™* "Reinforced Integral Truss System" Design
- ▲ Window options available

Color Options



\* See Flush Panel Design disclaimer.

# MODEL 625 (SB) SP/LP/FL




Model 625 SP with optional Sherwood Windows

Flush Panel w/woodgrain texture

The Model 625 is a thermally efficient steel front and steel backed "sandwich style" door. Formed with a unique sculpted raised panel the Model 625 is embossed with a natural wood grain texture. The core is CFC free Polystyrene insulation with a steel back skin for thermal efficiency. The Model 625 door will add great value and beauty to any home.

- ▲ 25 Gauge face/26 gauge back woodgrain textured steel
- ▲ sculpted panel design
- ▲ Short, Long panel or Flush available
- ▲ True 2" section thickness
- ▲ Tongue and groove section rail
- ▲ Doors pre-painted white, almond (sandstone or brown special order)
- ▲ 18" and 21" section heights
- ▲ Shadow groove on 21" sections
- ▲ Upgraded industry hardware packs available
- ▲ CFC free Polystyrene insulation with a 26 gauge white steel back skin
- ▲ Limited *Lifetime* warranty
- ▲ Window options and decorative hardware available
- ▲ Calculated R-Value 9.0
- ▲ Full section height hinge internal strip

Color Options

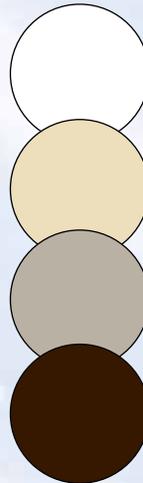

# MODEL 325 BB - 725 (SB) BB




Model 325 SP with optional Stockton Windows and Decorative Handles

Bead Panel

The Model 325/725 has a unique bead board raised panel, the Model 325/725 is embossed with a natural wood grain texture raised panel with recessed vertical grooves and a baked-on polyester paint finish. The Model 325/725 will give your home the appearance of having custom wood carriage house doors with the durability and longevity of steel and minimum maintenance.


- ▲ True 25 Gauge woodgrain textured steel
- ▲ Recessed verticle grooved panel design
- ▲ 2" section thickness
- ▲ Tongue and groove section rail
- ▲ Pre-painted white or brown (sandstone special order)
- ▲ 18" and 21" section heights
- ▲ No shadow groove
- ▲ Upgraded industry hardware packs available
- ▲ Optional rigid vinyl back skin (325)
- ▲ Limited *Lifetime* warranty
- ▲ *Exclusive RITS™* "Reinforced Integral Truss System" Design (model 325)
- ▲ Window options and decorative hardware available
- ▲ Optional CFC free Polystyrene insulation (model 325)
- ▲ Model 325 with no insulation calculated R-Value 6.25
- ▲ Optional model 725 with 26 gauge steel back skin and calculated R-value 9.0 available

Color Options

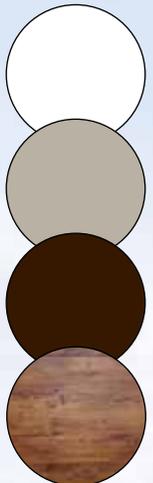

## Garage Door Decorative Window Options

Let your garage door's beauty shine through with window options that complement the architecture and style of your house. They are available in variety of styles match various home designs and the inserts are easy to remove for trouble-free cleaning or to change designs. Windows are available with a selection of glass upgrades and have a 2 year warranty against defects in materials or workmanship.

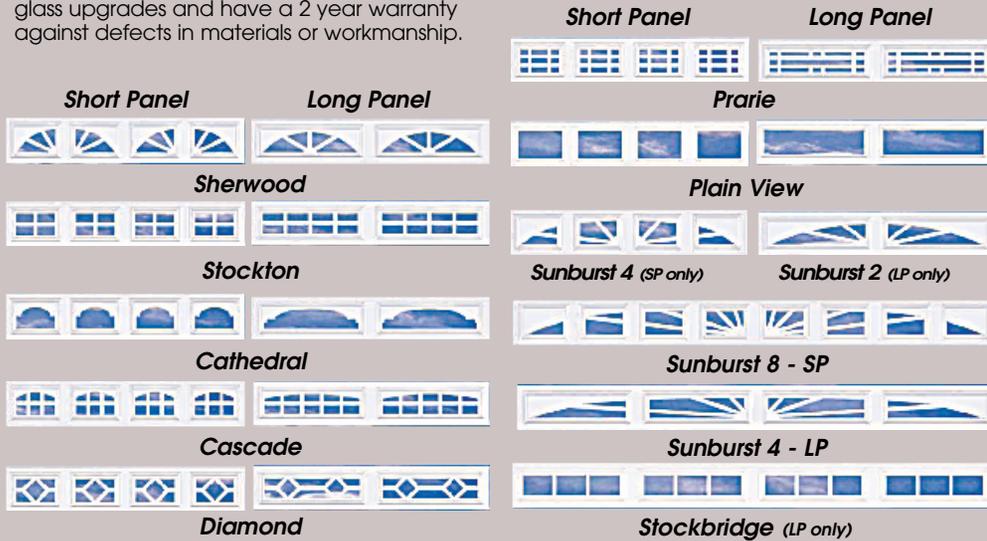

Note: When ordering model 325/725 glasstop, please specify if glass style is short or long panel.

## Door Hardware

### Steel Cast Handles



Standard Handle  
#CCSH-B1  
(Stamped)

### Door Pulls



Drop Ring Pull Handle  
#CCDRP-B6



Drop Ring Twist Handle  
#CCDR-TB7



Twisted Lever Handle  
#CCTLH-B14  
(Pair/Fixed Position)

### 16" Cast Carriage Hinges



Arrowhead Hinge-12" #CCAH-B10

Dome Hinge-12" #CCDH-B12

Spade Hinge-12" #CCSH-B13


## Residential Quiet Package

First United Door Technologies offers the Residential Quiet Package which consists of two noise reducing products to insure a more quiet operation of your garage doors. Worn metal hinges make a lot of noise and can cause the door to bind at the door sections. But now there's a solution. First United Door Technologies' residential composite hinges are engineered from fiberglass reinforced nylon and rated for doors up to 400 pound / 8' high doors. They are strong, flexible and will never rust. Unlike steel hinges, they won't make squeaking or squealing noises when used. They require NO lubrication and are great for areas where corrosion is a concern. Also included in this package are 11-Ball Nylon Rollers.




### Optional Energy Efficient Insulation

CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option. Calculated door section R-Values are in accordance with DASMA TDS-163.



### Exclusive RITS™ Design

Exclusive RITS™ "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.



### Galvanized I-Beam Center Stiles

I-beam center stiles are engineered to reinforce the construction of the section and designed to eliminate the use of plastic reinforcement angles when the section is insulated.



### Reinforced Aluminum Bottom Extrusion

Heavy duty grooved "U" type weather seal is set into an aluminum reinforced "L" angle, and fastened to the bottom section.

**Warranty** - The Model 225, 325, 725, 224 and 625 offer a limited lifetime warranty. 1st United Door Technologies warrants each garage door to be free from defects in material and workmanship to the original purchaser. A copy of this warranty is available upon request or downloadable from our website www.firstudt.com.

Universal Series garage doors are available with a wind load reinforcement system to withstand high-wind conditions. Factory quote only.

**Flush Panel Design Disclaimer** - 1st United Door Technologies disclaims any quality issue related to aesthetic oil canning on pan door product and customers are required to communicate and acknowledge this as no returns will be allowed for this sole reason. Oil Canning can be defined as visible waviness in the flat areas of metal garage door and is referred to as elastic buckling (more commonly known as "stress wrinkling"). The degree of waviness can be difficult to measure, but may be apparent, especially under specific lighting conditions.

**Window, Window Frames & Inserts Limited Warranty** - If any window or window frame is defective in material or workmanship, First United Door Technologies warrants to the original purchaser that First United Door Technologies or its Authorized Dealer, will repair, repaint or replace, at First United Door Technologies or its Authorized Dealer's, option, the defective item for two (2) years from the date of purchase. Garage doors, frames and inserts that are painted or stained with darker colors are susceptible to fading. The warranty excludes fading or change in color that is not uniform due to exposure to sunlight or other elements. For any insulated or laminated glass that is defective in material or workmanship, First United Door Technologies warrants to the original purchaser that First United Door Technologies or its Authorized Dealer, will repair, repaint or replace, at First United Door Technologies or its Authorized Dealer's option, the defective item for two (2) years from the date of purchase. This warranty excludes single pane glass and decorative hardware.

**Face/Back side colors:** White/White; Almond/White; Brown/Sandstone; Sandstone/Brown except Models 625 and 725 with white back. \*Check with your local Dealer for price and availability. Color may vary. Factory color chip samples available for closer match.

Brochure color options may vary from actual product.



## 1st United Door Technologies, LLC

1016 W. Geneva Drive | Tempe, Arizona 85282

Phone: 480-705-6632 | Fax: 480-705-8497 | Toll Free: 866-366-7636