

# Dynamic Liquid Thermal



[www.veltronevdock.com](http://www.veltronevdock.com)


## Liquid Cooling Charger - 600A

Product category	Liquid Cooling Terminal Charger
Model	600 A
Dimension (H x W x D) (mm)	1600 x 700 x 400
Display	7.0 inch colour touch screen
Power Factor	≥ 0.99
Current Harmonic (THDI)	≤ 5%
System Efficiency	≥ 95%
Output Voltage (V)	200 - 1000Vdc
Constant Power Output Voltage (V)	300 - 1000Vdc
Max Output Current (A)	600 A
Number of Charging Port	1
Lenght Charging Cable/Plug	5 meter (customizable)
Sound Noise (dB)	< 50
Working Altitude	< 2000m
Operating Temperature	- 20 °C ± 50 °C
Storage Temperature	- 40 °C ± 70 °C
Avg Relative Humidity	5 - 95 %
Protective Function	Overload , Short Circuit , Overheating , Leakage , Emergency Stop , etc
Charging Mode	Auto basis, Time basis, Amount basis, Energy basis, SOC basis
Charging Operation	RFID Card, Scan Code, Mobile App
Protection Grade	IP54
Cooling Method	Liquid Cooling
Communication Interface	Standard CAN, Ethernet , RS485, RS232, GPRS
Monitor Interface	OCPP 1.6J

Connector

Charging Connector Standard				
	America	EU	Japan	China
DC				
	CCS1	CCS2	CHAdeMO	GB/T 20234.3

Actual Dimension

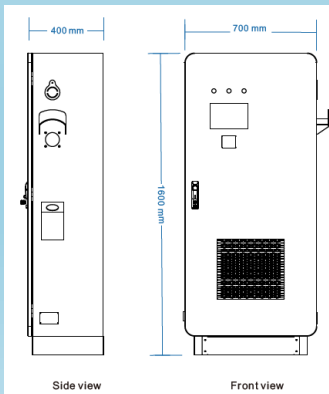

Product Specification

NET-ZERO EMISSION  
**2050**

initiative towards sustainability