



## Product Data

### Skylight Safety Screen Sizing Chart

- Daylight America's **PRO-TECT™** fall prevention safety screens are constructed of welded galvanized wire mesh having a minimum **.250"** wire diameter with 4" x 4" openings to comply with OSHA Standard 29 CFR §1910.23.
- Stainless Steel fasteners and attachment hardware are included with all screens
- Our Positive Lock stainless steel hardware system assures the screen cannot be freed during impact or conditions other than intended service removal.
- CAL-OSHA** screens include end support stanchions for the **additional 200 lbs.** weight requirement

Screen Model No.	O.D.(W)*	O.D.(L)*	Wire dia.
DA-PRO-4896	48	96	.250
DA-PRO-5298	52	98	.250
DA-PRO-54100	54	100	.250
DA-PRO-4876	48	72	.250
DA-PRO-6076	60	72	.250
DA-PRO-7676	72	72	.250
DA-PRO-6060	60	60	.250
DA-PRO-4848	48	48	.250
DA-PRO-5252	52	52	.250
DA-PRO-2852	28	52	.250

\* Dimensions are skylight outside frame measurements.


Custom sizes available.

#### Standard OSHA Compliant Screen



#### OSHA & Cal-OSHA Compliant Screen

(Additional stanchion supports, 400 lb. test)

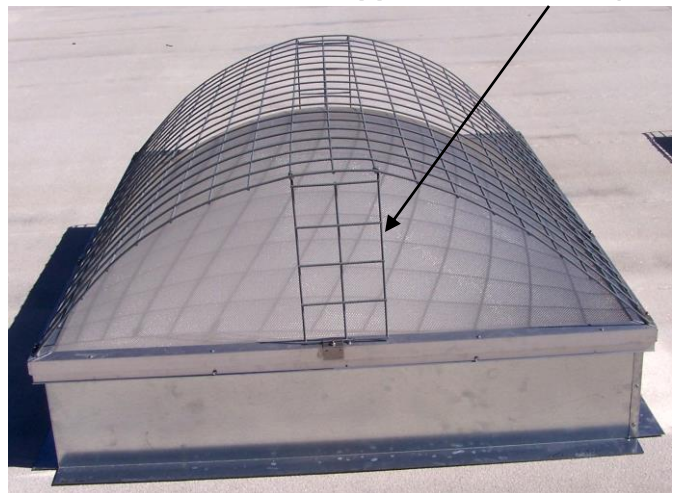

Daylight America, Inc. 602-262-5483 FX 602-262-5486

2206 N. 23<sup>rd</sup> Ave., Phoenix, Arizona 85009