



SCALE 1/4" = 1'-0"



SCALE: 1/4" = 1'-0"




SCALE: 1/4" = 1'-0"



SCALE: 1/4" = 1'-0"

110962

THE CONTRACTOR ASSUMES FULL RESPONSIBILITY FOR THE CORRECT INSTALLATION OF ALL EXTERIOR FINISHES AND WEATHERPROOFING.

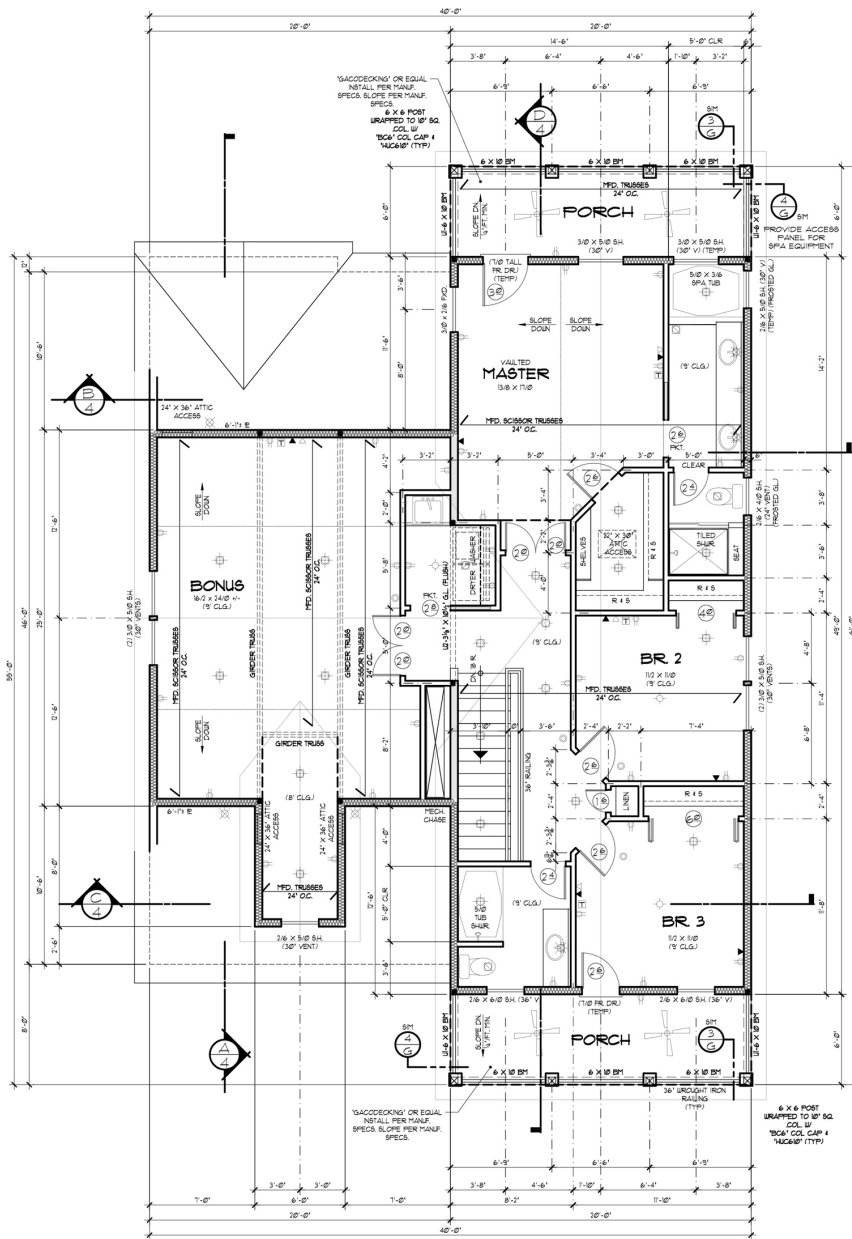


- LEGEND**
- RECESSED LIGHT
 - RECESSED DIRECTIONAL LIGHT FIXTURE
 - WALL-MOUNT LIGHT
 - SURFACE-MOUNT LIGHT
 - FLOOD LIGHT
 - SURFACE MOUNTED FLUORESCENT
 - RECESSED EXHAUST FAN VENTED TO THE EXTERIOR
 - CEILING FAN
 - DUPLEX OUTLET
 - CEILING MOUNTED DUPLEX OUTLET
 - 220V OUTLET
 - FLUSH FLOOR MOUNTED OUTLET (EVERY LOC.)
 - TELEPHONE OUTLET
 - DATA OUTLET
 - TELEVISION OUTLET
 - SPEAKER LOCATION
 - SMOKE / CO DETECTOR (SEE GENERAL NOTES FOR OTHER SPEC'S)
 - BEARING POINT LOCATION (PROVIDE SLD BEARING P.N. OF MEMBER WITH UNO.)
 - POINT LOAD FROM ABOVE
 - 4 X 4 POST FROM ROOF HP, VALLEY OR RIDGE DOWN TO BEARING POINT ON WALL BELOW (MAX. OF 48" FROM VERT.)
 - 4 X 10 HDR. BEARING WALL INT. DOOR & OPENINGS W/ P.N. (7/2" X SUPPORT EACH END UNO.)
 - DROPPED STRUCT. MEMBER BEARING * WALL

C.O. DET. LOCATION

CARBON MONOXIDE ALARMS SHALL BE LOCATED IN EACH BEDROOM OR WITHIN 5 FEET OUTSIDE OF EACH BEDROOM DOOR AT EVERY FLOOR LEVEL W/ BEDROOMS (SEE SHEET "W" FOR ADD'L INFO)

ENERGY ENVELOPE KEY

WALL, FLOOR, CEILING, INSL. (SEE SHEET "W" FOR INSULATION VALUES)

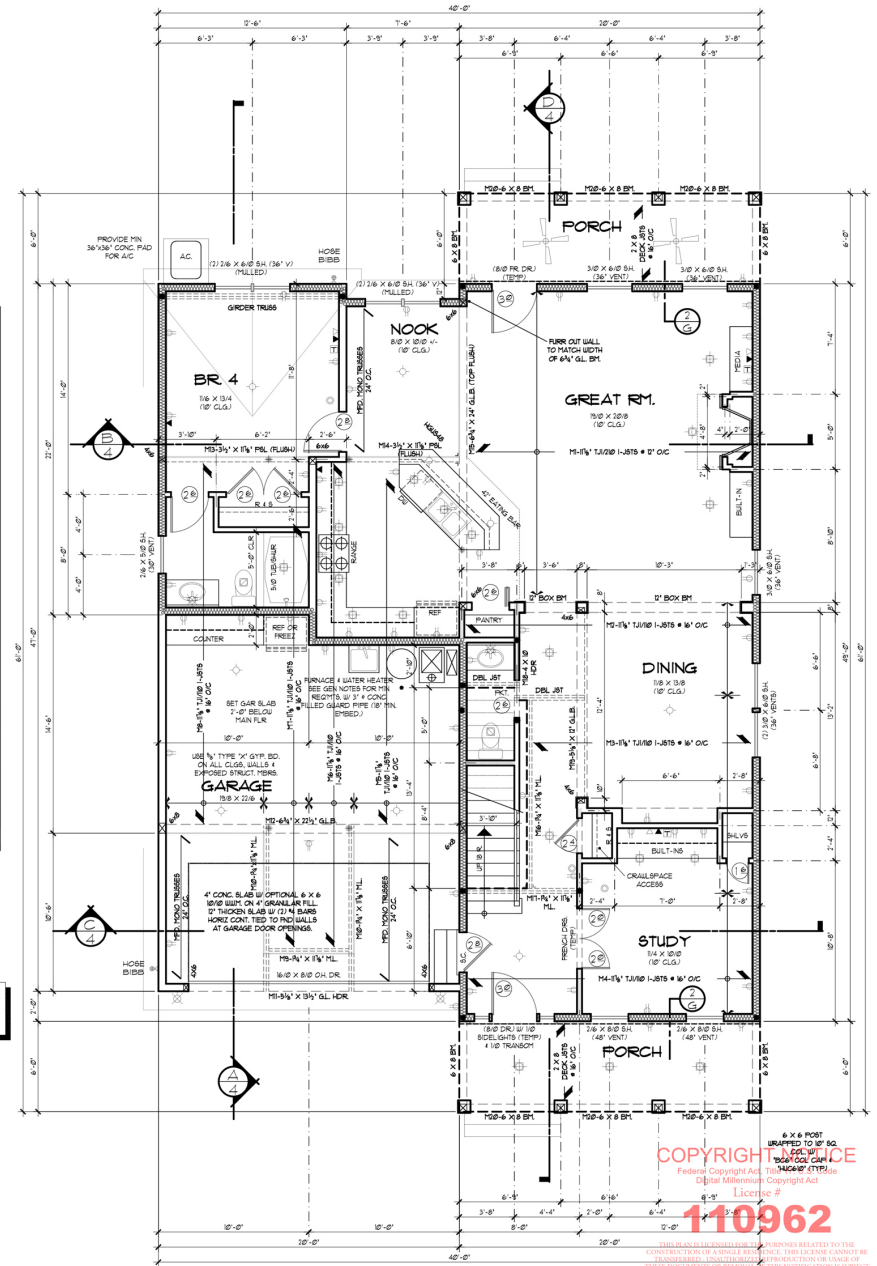

COPYRIGHT NOTICE

110962

License #

Alasford
COLLECTION

25# SNOW LOAD

22189
2