


PATENTED

4300 SERIES 18" & 22" AWNING HINGE



STYLE DESCRIPTION	ASSEMBLED UNITS	NON-ASSEMBLED		DIMENSIONS				
		ARMS	TRACK	A	B	C	D	E
18" AWNING	4318D L/R	4018D L/R	3318B-L/R13	6.938	9.500	2.000	8.750	18.000
22" AWNING	4322D L/R	4022D L/R	3322B-L/R13	8.938	11.500	4.000	10.750	22.000

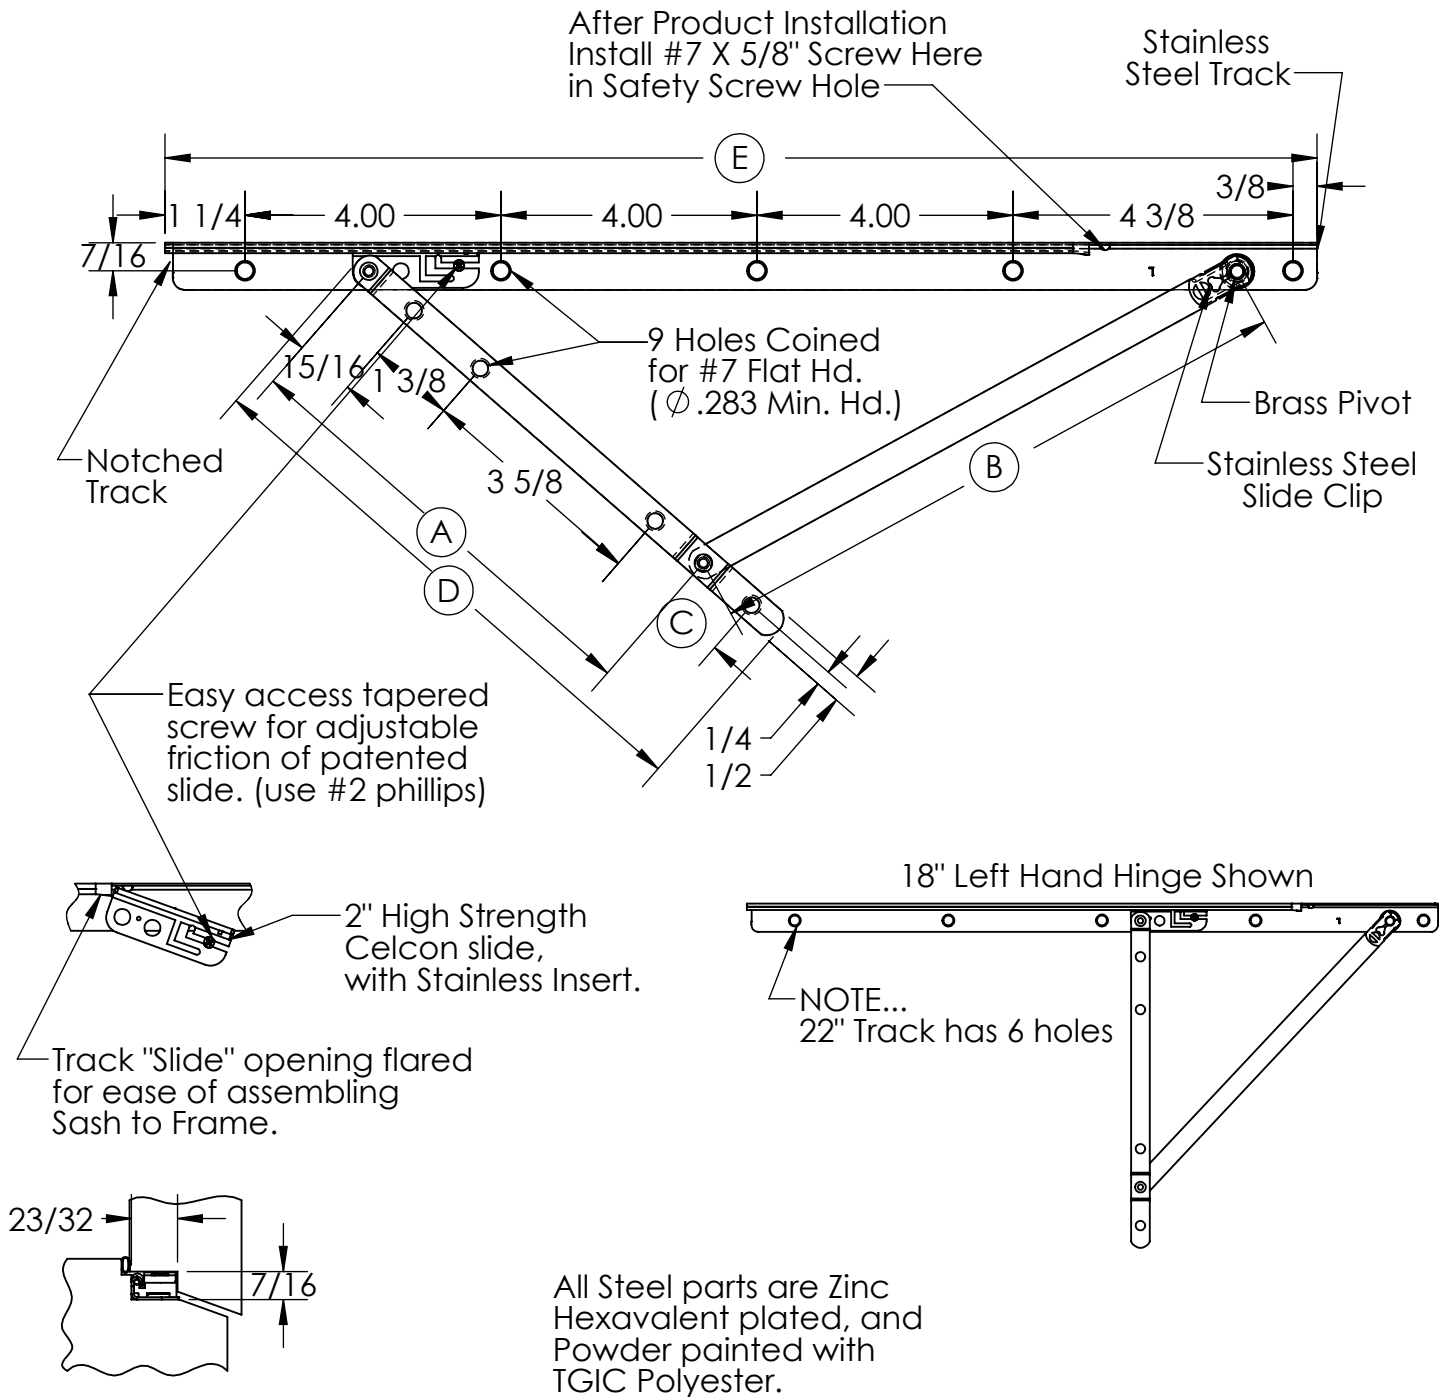


ALL METAL STAMPING, INC.

411 W. Spruce St. PO Box 485 Abbotsford, WI 54405
www.AllMetalStamping.com

Phone (715) 223-6324
Fax (715) 223-3352

Safety Screw Installation

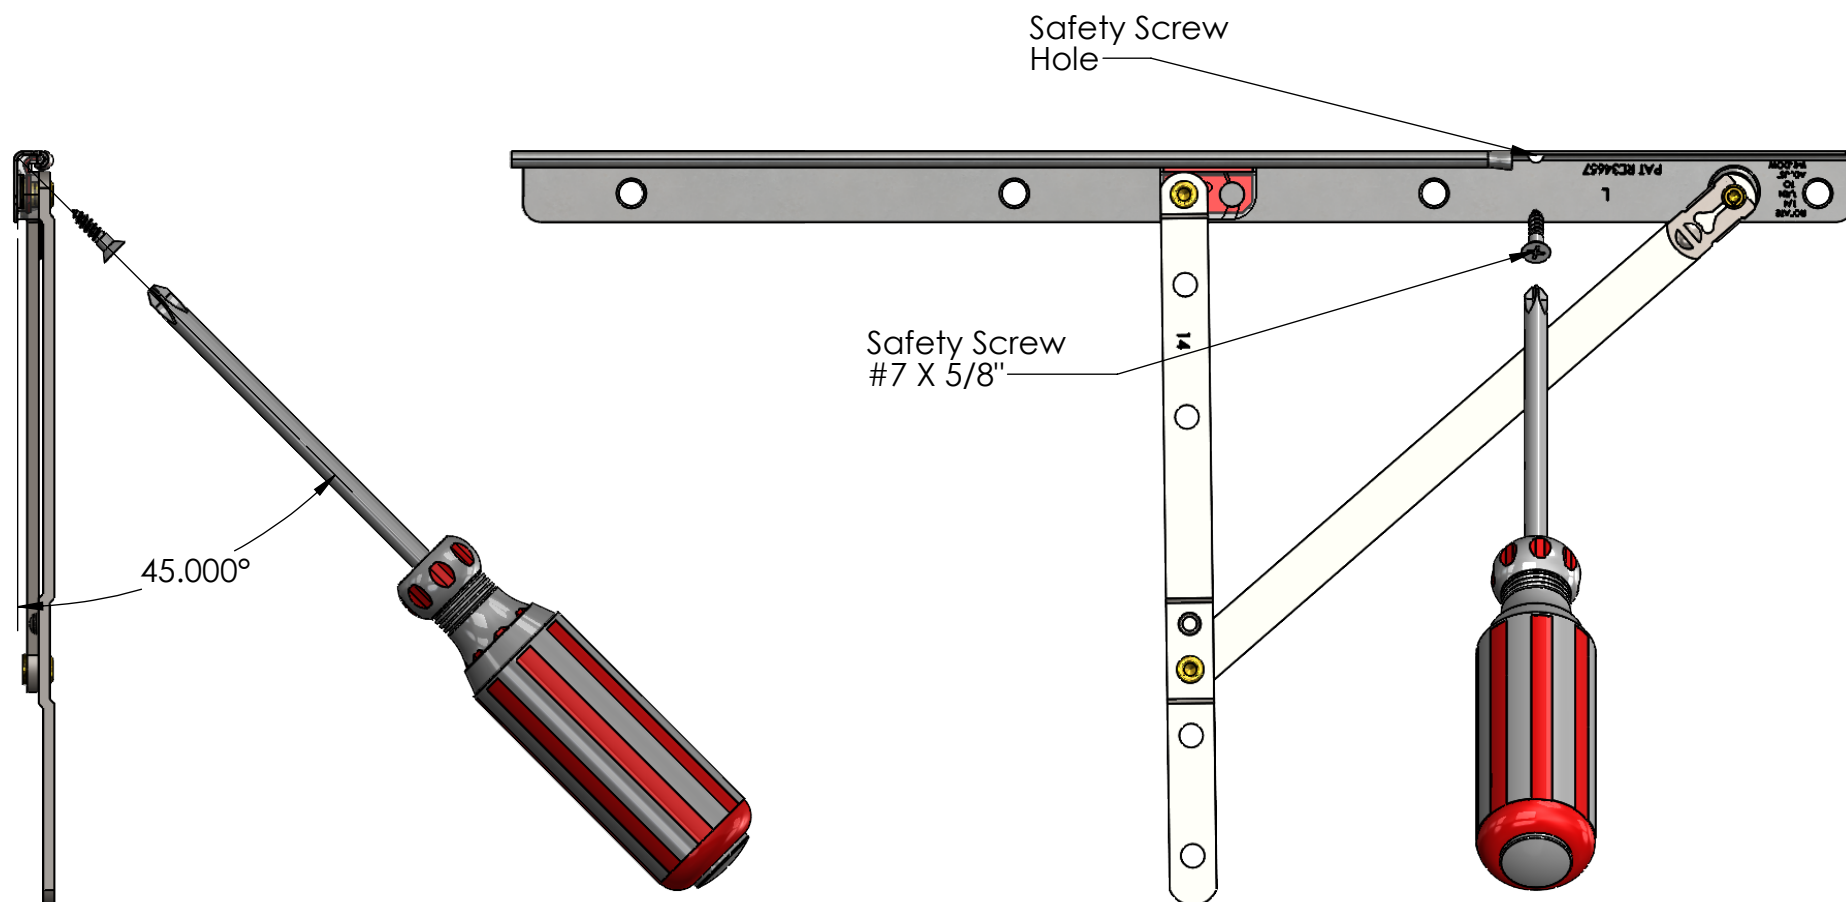

The Safety Screw shall be installed on the top hinge only. This will prevent the sash from falling out if the hinge arm is disconnected from the track pivot. The safety screw can be installed using a #2 phillips screwdriver and a standard track screw (#7 X 5/8") driven in at a 45 degree angle without the need for a pre-drilled hole.