


PATENTED

10" AWNING HINGE



STYLE DESCRIPTION	ASSEMBLED UNITS	NON-ASSEMBLED		DIMENSIONS		
		ARMS	TRACK	A	B	C
STANDARD	3366D L/R	3066D L/R	3305 L/R	4.869	3.438	5.000
WASHABILITY	3386D L/R	3086D L/R	3305 L/R	5.437	3.663	4.775
EGRESS	3396D L/R	3096D L/R	3305 L/R	4.025	3.032	5.406

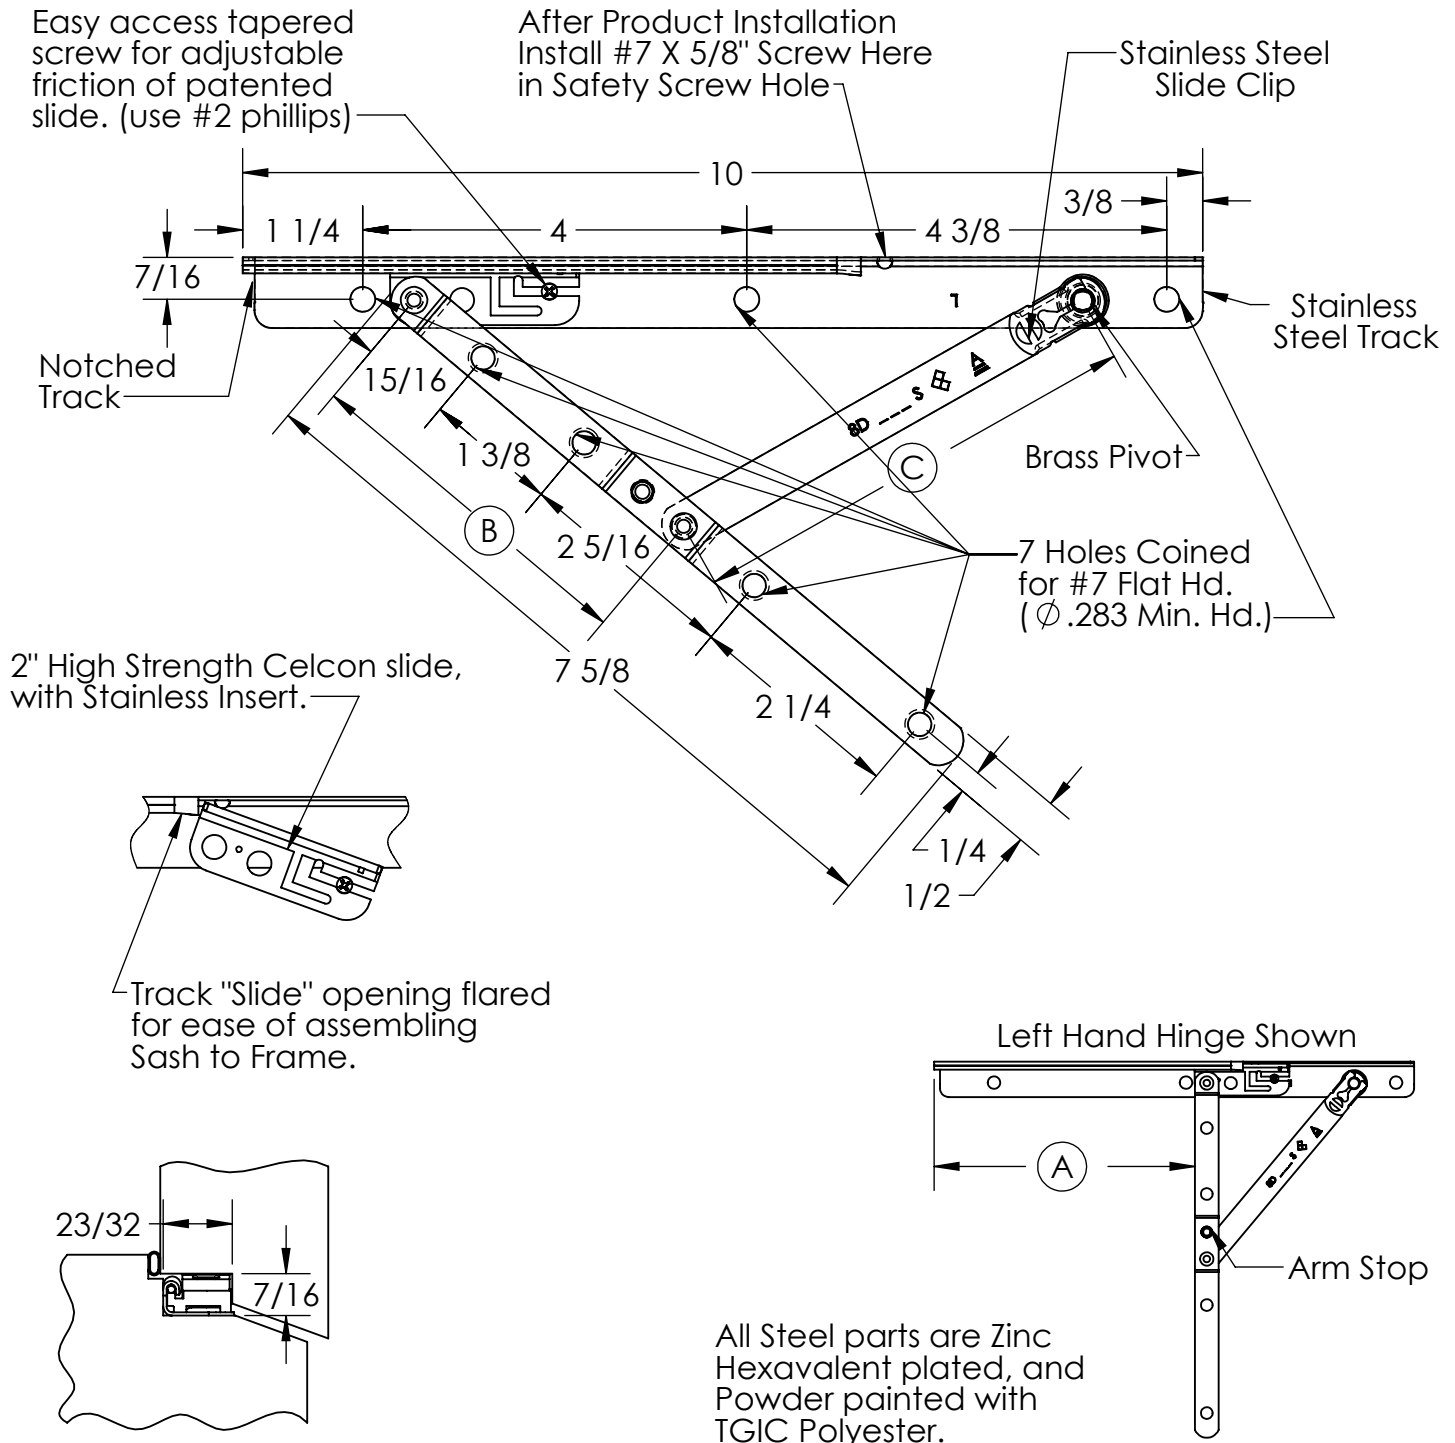


ALL METAL STAMPING, INC.

411 W. Spruce St. PO Box 485 Abbotsford, WI 54405
www.AllMetalStamping.com

Phone (715) 223-6324
 Fax (715) 223-3352

Safety Screw Installation

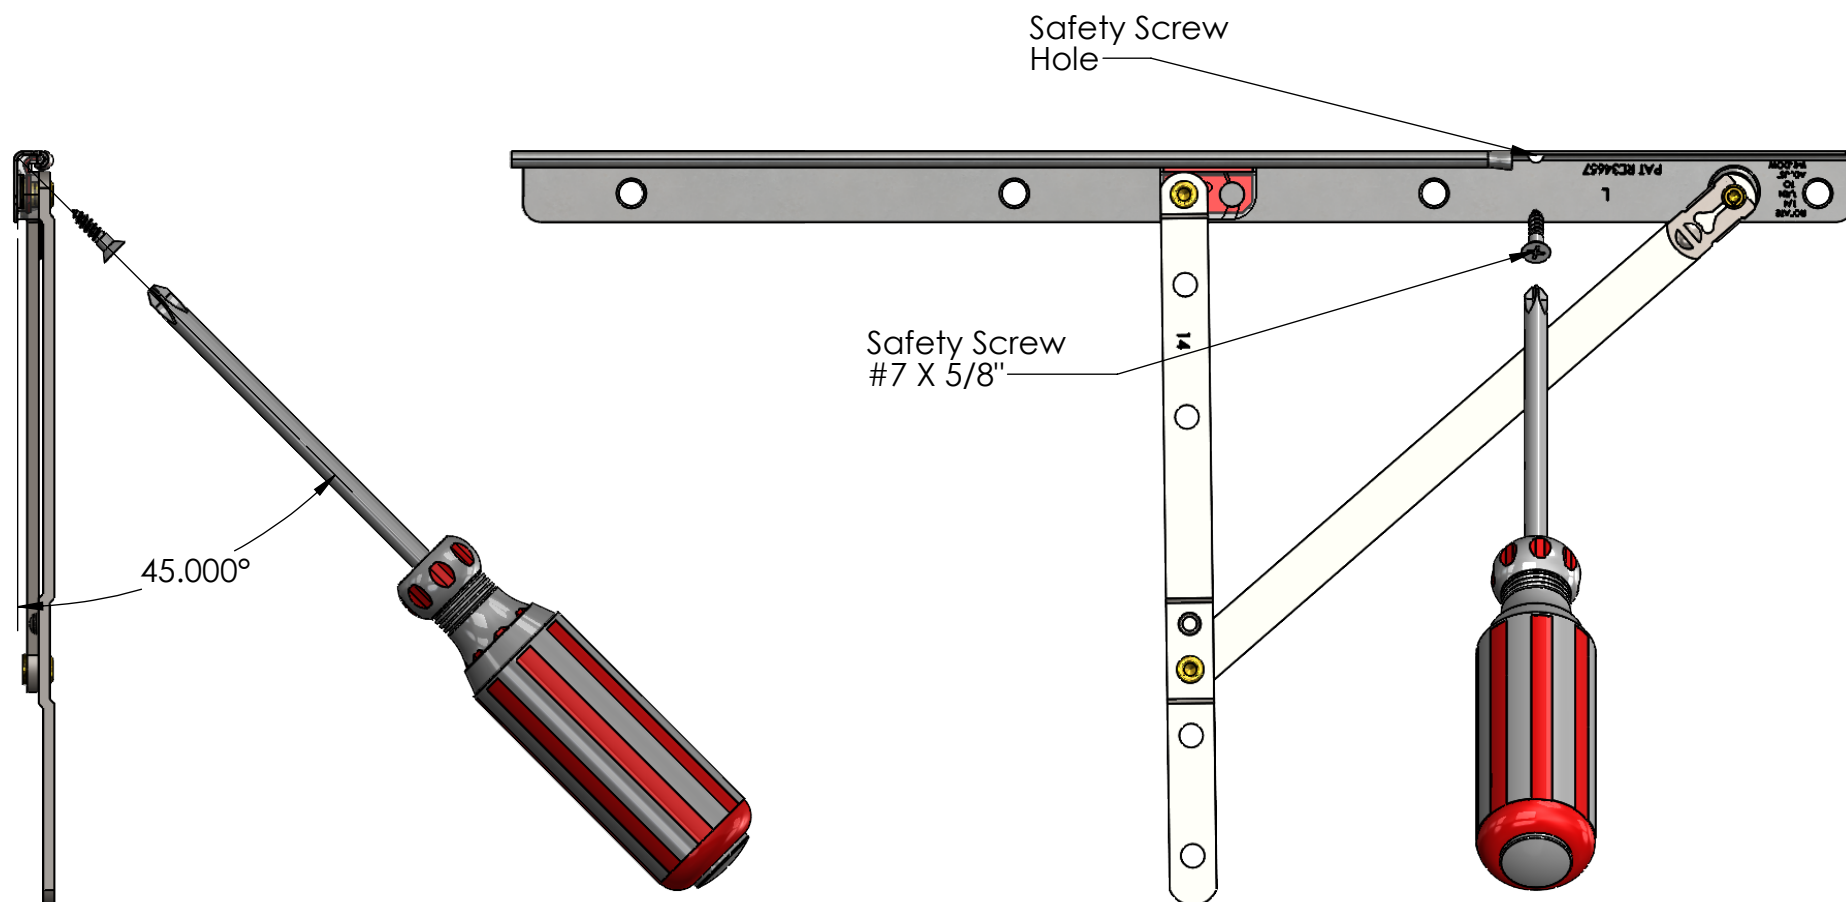

The Safety Screw shall be installed on the top hinge only. This will prevent the sash from falling out if the hinge arm is disconnected from the track pivot. The safety screw can be installed using a #2 phillips screwdriver and a standard track screw (#7 X 5/8") driven in at a 45 degree angle without the need for a pre-drilled hole.