


3800 SERIES ADJUSTABLE 10" CONCEALED CASEMENT HINGE



STYLE DESCRIPTION	ASSEMBLED UNITS	NON-ASSEMBLED		DIMENSIONS			DEGREE OF OPENING
		ARMS	TRACK	A	B	C	
STANDARD	3860D L/R	3060D L/R	3800 L/R	4.869	3.438	5.000	97°
STANDARD	3862D L/R	3062D L/R	3800 L/R	4.869	3.438	5.000	94°
EGRESS	3870D L/R	3070D L/R	3800 L/R	2.295	1.938	6.500	N/A
WASHABILITY	3880D L/R	3080D L/R	3800 L/R	5.437	3.663	4.775	90°
EGRESS	3890D L/R	3090D L/R	3800 L/R	4.025	3.032	5.406	N/A

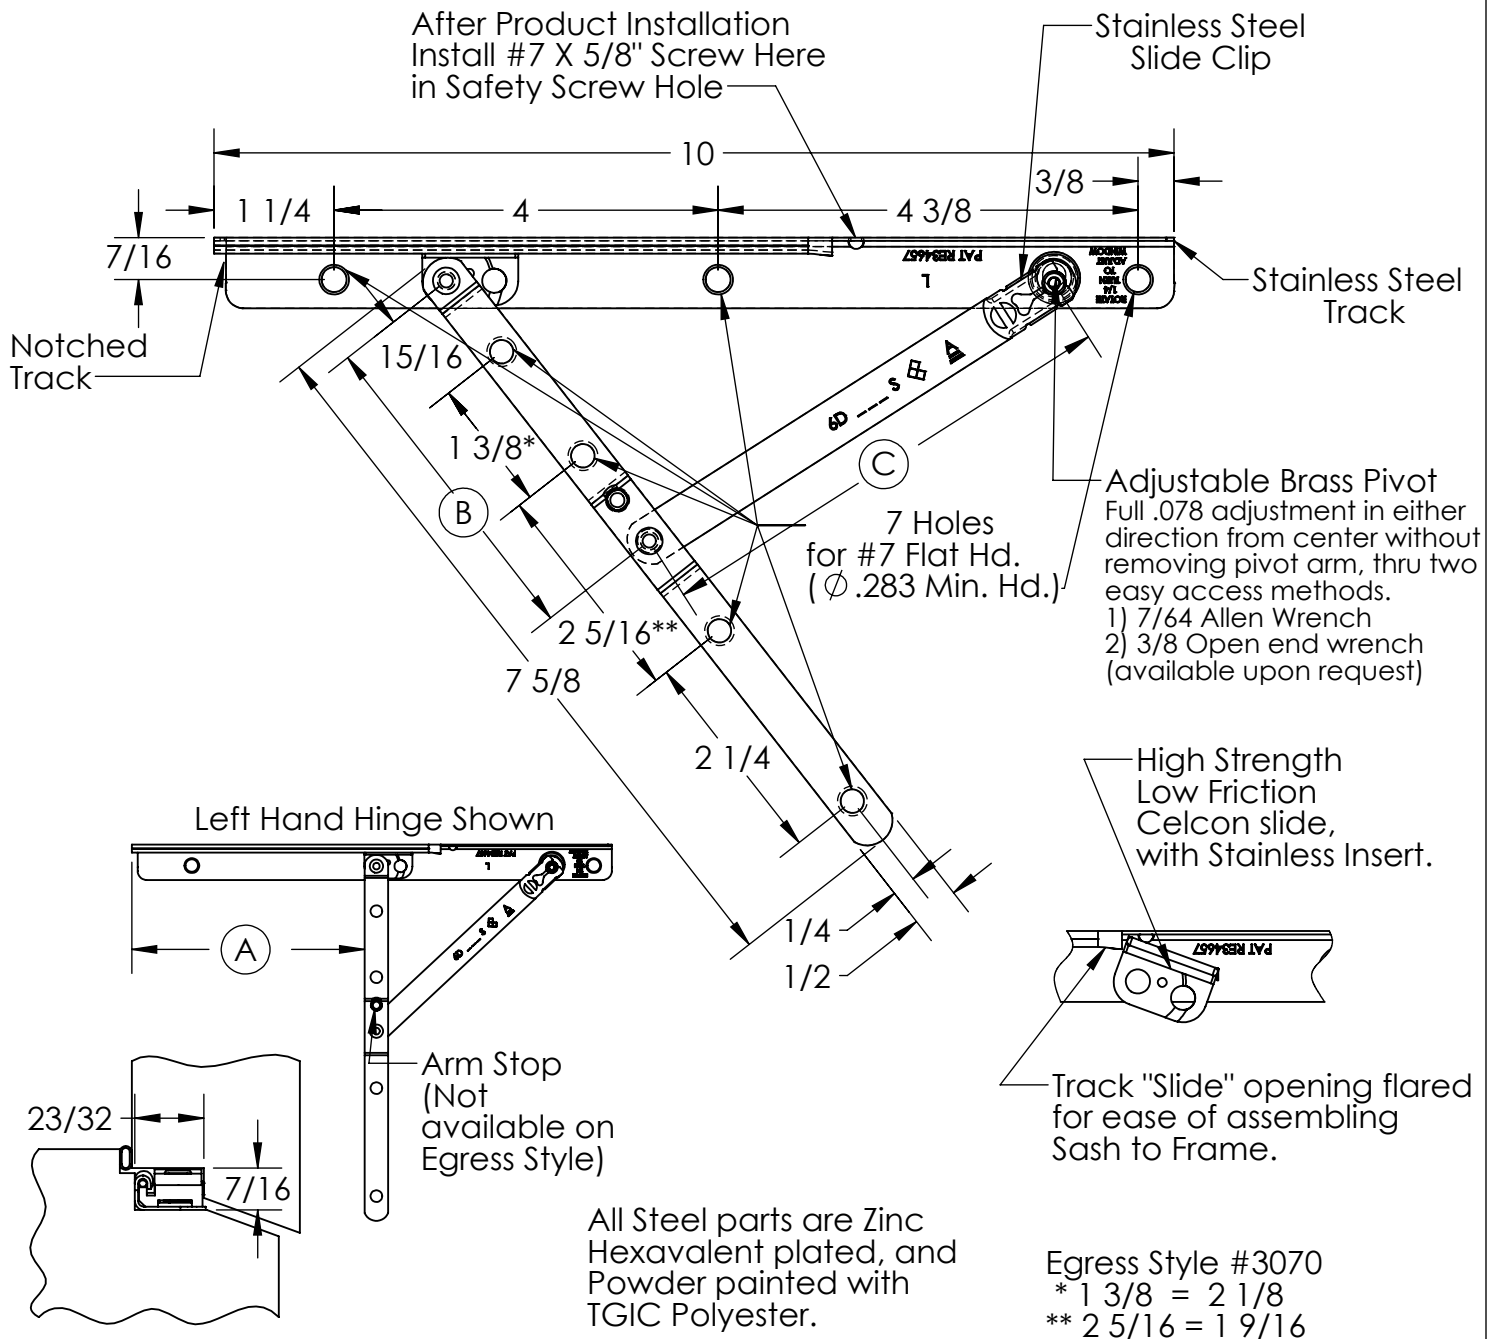


ALL METAL STAMPING, INC.

411 W. Spruce St. PO Box 485 Abbotsford, WI 54405
www.AllMetalStamping.com

Phone (715) 223-6324
Fax (715) 223-3352

Safety Screw Installation

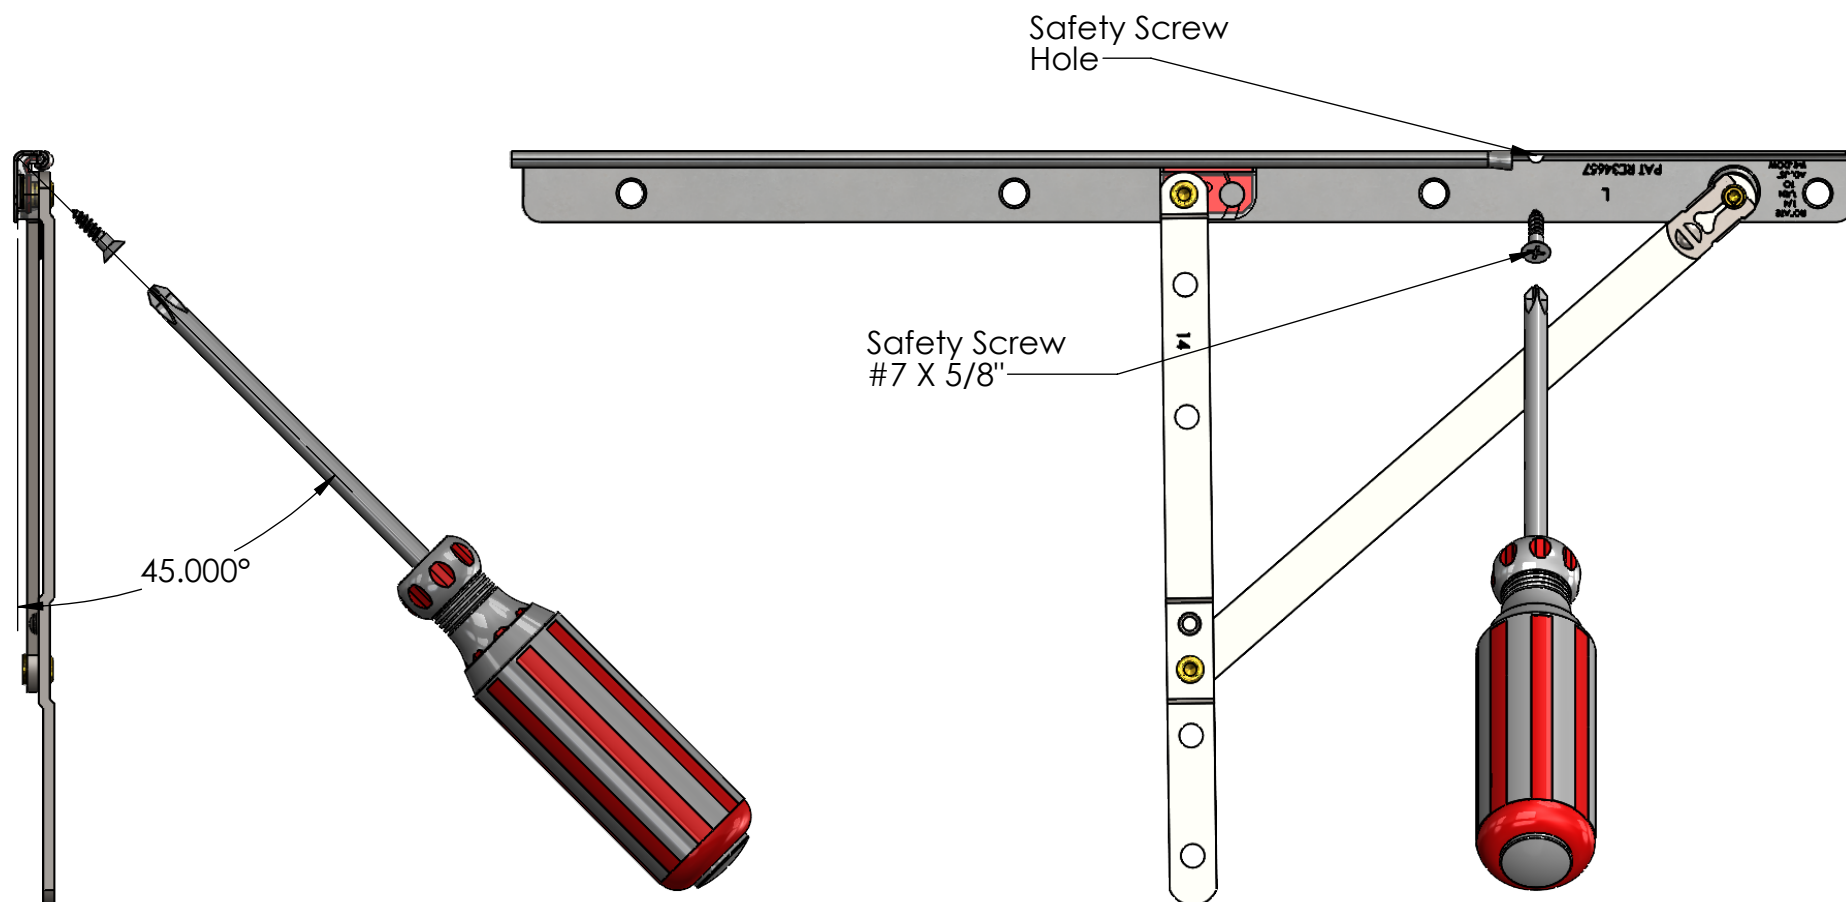

The Safety Screw shall be installed on the top hinge only. This will prevent the sash from falling out if the hinge arm is disconnected from the track pivot. The safety screw can be installed using a #2 phillips screwdriver and a standard track screw (#7 X 5/8") driven in at a 45 degree angle without the need for a pre-drilled hole.