

110 & 110B Lite Kit Form for Quotes & Orders- Complete in order each Section before moving to next section.

SECTION A: Company Name & Appropriate Branch _____ Email _____

Quote or Purchase Order? Q Quote Order PO#

Today's Date _____ Lead Time Standard 7-10 days 3-5 days (if available)

SECTION B: Frame Model (check ONE) 110 110B (recommended for stainless steel) Quantity

Visible Lite Dim.(inches) W _____ H _____ Door Thickness 1.75" Other

SECTION C: Material _____ Powder Finish _____ RAL# _____

Veneer Type _____ Fastener Type _____

Fire-rated, tempered, impact resistant, bullet resistant & more glass types available.

SECTION D: Glass Type _____ Other _____

Glass Thickness (inches) _____ Minute Rating _____

Glazing Tape Note: For most applications, our 110 & 110B do NOT require glazing tape or intumescent. See our glazing tape conditions HERE.

Tape Required? _____

If NO tape is required, skip to *Total Pocket Thickness- no tape.

Tape Type _____

Tape Thickness per Side 1/16" 1/8"



Total Pocket Thickness With Tape:
Multiply 'Tape Thickness per Side' by 2 and add to the Glass Thickness (entered above)

***Total Pocket Thickness- no tape:** Glass Thickness (entered above)
(Cannot exceed 1.125")

For further explanation on calculating Total Pocket Thickness, see example D.1 below)

Total Pocket Thickness With Tape:
(Cannot exceed 1.125")

Ship to ZIP code: _____ Providing a Ship To zip code allows us to accurately process your order or quote request.

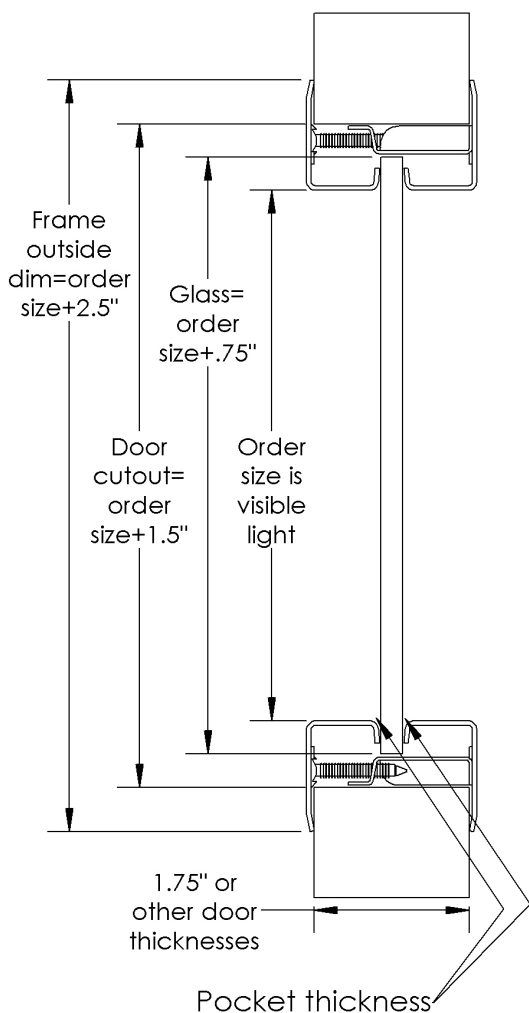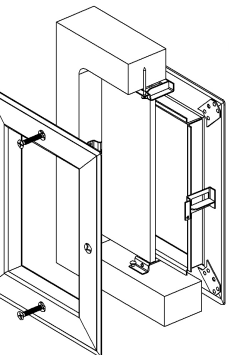

D.1 Total Pocket Thickness example:

Tape Thickness per Side (1/8") x 2 = 1/4"
 Glass Thickness _____ + 3/8"
Total Pocket Thickness With Tape = 5/8"

