

LED STRIP LIGHT



Product Features

- Luminous part is integrated and fastened to fixture body by snap locks
- Changeable lighting module (R, M type for option)
- 0-10V Continuous dimming to 10% Minimum
- Tool-less accessed and easy to install
- Field-adjustable light output and CCT selectable
- Bi-level motion sensor or battery backup are available.



Applications

Indoor Commercial Task Lighting Back of House, Office, Healthcare, and Educational Hospitality, Grocery, Retail, Storage Facilities Stairwell,



Construction

- Powder coated sheet steel stamping
- Polycarbonate end cup
- High transparency polycarbonate diffuser

Electrical

- Input 120-277V 50/60Hz
- 0-10V dimming 10% Minimum
- THD < 20%
- Power factor > 0.9

Compliance

- ETL listed for damp location
- Ambient operating temperatures -25C to 45C
- LED complies with LM-79 and LM-80
- DLC Standard

Order No.	INPUT	Wattage	Lumen	CCT	Ra
MXL2130R*-CCT-2LED1020K83550	120-277V	10-15-20W Selectable	1150-1800-2300lm	3500-4000-5000K selectable	Ra80
MXL2130R-CCT-3LED2030K83550	120-277V	20-25-30W Selectable	2300-2900-3500lm		Ra80
MXL2130R-CCT-4LED3040K83550	120-277V	30-35-40W Selectable	3900-4550-5200lm	3500-4000-5000K selectable	Ra80
MXL2130R-CCT-8LED6080K83550	120-277V	60-70-80W Selectable	7800-9150-10400lm		Ra80
MXL2130M*-CCT-2LED1020K83550	120-277V	10-15-20W Selectable	1150-1800-2300lm	3500-4000-5000K selectable	Ra80
MXL2130M-CCT-3LED2030K83550	120-277V	20-25-30W Selectable	2300-2900-3500lm		Ra80
MXL2130M-CCT-4LED3040K83550	120-277V	30-35-40W Selectable	3900-4550-5200lm	3500-4000-5000K selectable	Ra80
MXL2130M-CCT-8LED6080K83550	120-277V	60-70-80W Selectable	7800-9150-10400lm		Ra80


* Remark: R = Round lens, M=Mushroom Lens

LED STIP LIGHT




DIMMENSION

2FT

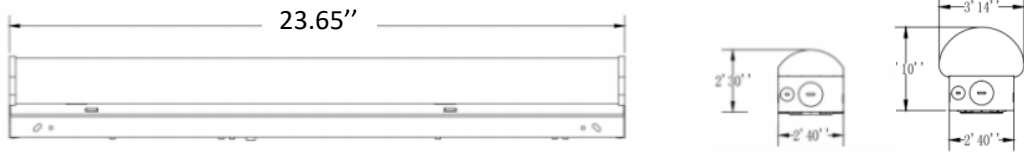

4FT

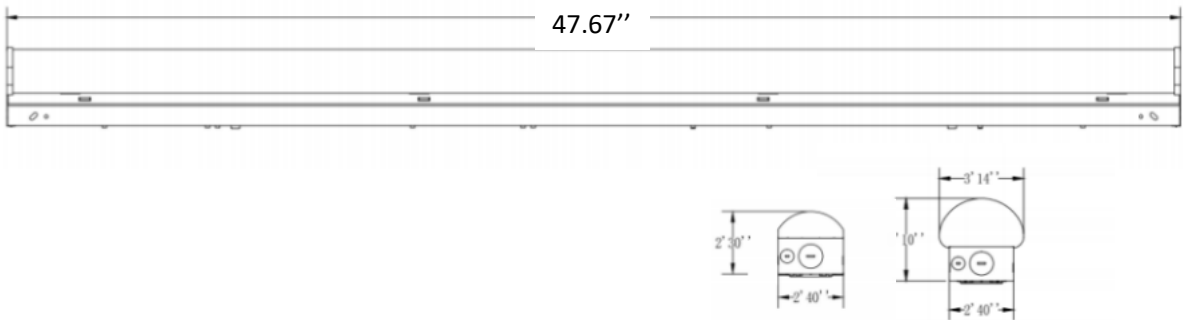

8FT

