



Essential Components Catalog

Circuit Protection, Motor Controls and Pilot Devices

Hotline 888-949-8337



Branch, Motor Circuit and Supplementary Protection

Molded Case Circuit Breakers	A
Molded Case Switches	B
Motor Circuit Protectors	C
Miniature Circuit Breakers	D
Fuse Holders	E



Motor Controllers and Overload Protection

Manual Motor Starters	F
Contactors	G
Overloads	H
Safety Contactors	I
Safety Control Relays	J



Pilot Devices

Indicator Lights	K
Push Buttons	L
Selector Switches	M

Appendix

Appendix A: Short Circuit Current Ratings	N
--	---

Excellent Products. Exceptional Value.

Company Overview

About us

NOARK Electric is a global manufacturer of low-voltage electrical components for industrial applications. We specialize in motor controls and circuit protection for original equipment manufacturers. Our mission is to provide customers with the highest quality products at an exceptional value and back them with world-class service and support. Every NOARK product is tested and certified to the highest industry standards.

Research and Development

The entire portfolio of high-quality NOARK products is designed for manufacturing and assembly. Each component is developed in-house by our engineering team to meet the strictest standards and performance requirements. This dedication to excellence has led to the development of patented technology found in many of our products.

World-class Manufacturing

After being thoroughly tested, approved and certified – each NOARK product is sent into production at our state-of-the-art manufacturing facilities. This allows us to maintain strict quality control standards throughout the manufacturing process. In addition, NOARK Electric adheres to a policy of environmental protection and sustainability.

North American Distribution

NOARK's distribution centers are located in Pomona, CA and Kitchener, ON, with the aim of ensuring prompt and reliable deliveries of the entire product range to our customers all over North America. Our supply chain team works closely with our factories and logistics partners to ensure the availability of our products on the North American market and provide logistics services on the level which our customers expect.

NOARK Electric is a wholly subsidiary of the largest electrical manufacturing group in Asia with over 30 thousand employees and sales revenue of \$10 billion USD. We have corporate facilities in Los Angeles, Shanghai and Prague to service the requirements of individual markets and countries.

140+
Countries

300+
Overseas Distributors

20
Overseas Subsidiaries

22
Logistics Centers

3
R & D Centers

10,000,000+
Sq.Ft. Manufacturing Space

30,000+
Employees Worldwide



Table of Contents

Branch and Motor Circuit Protection

Molded Case Circuit Breakers (MCCB) - UL 489 Branch Circuits	1
Technical Data.....	8
Molded Case Switches (MCS) - UL 489	10
Technical Data.....	12
Motor Circuit Protectors (MCP).....	13
Technical Data.....	15
Accessories.....	17
Miniature Circuit Breakers (MCB) - UL 489 Branch Circuits	26
Technical Data.....	34
Accessories.....	35
Miniature Circuit Breakers (MCB) - UL 1077 Supplementary Protectors	37
Technical Data.....	40
Accessories	41
F30 Series Fuse Holder - UL4248-1-4-19	43

Motor Controllers and Overload Protection

Manual Motor Starters - UL 60947-4-1 (formerly UL 508)	46
Technical Data.....	48
Accessories.....	49

IEC Contactors - Ex9C Series

IEC Contactors - UL 508, 60947-4-1	54
Technical Data.....	56
Accessories.....	58
Contactors - General Purpose	60
Technical Data.....	62
Accessories.....	69
Technical Data.....	74
Thermal Overload Relays	76
Technical Data	78
Safety Contactors - UL 60947-5-1 Safety function applications	82
Technical Data.....	84
Safety Control Relays - UL 60947-5-1 Safety function applications.....	86
Technical Data.....	88

Pilot Devices

Pilot Devices - UL recognized components, IEC/EN 60947	89
Indicator Lights.....	91
Pushbuttons.....	92
Selector Switches	95
Illuminated Pushbuttons.....	96

Appendix

Appendix A: Short Circuit Current Rating Tables	98
Appendix B: Terms and Conditions of Sale.....	104

Molded Case Circuit Breakers

UL 489 and UL 60947-4-1 (formerly UL 508) Applications

A molded case circuit breaker can be used to provide overload and short circuit protection for cables, control panels, motors and branch circuits. In addition, the National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

The molded case circuit breaker can provide the means of disconnecting power and provides short circuit protection under UL 60947-4-1 type C protection. The magnetic only Motor Circuit Protector (MCP) can provide the same function under UL 60947-4-1 type D protection.

TYPE C

Components	Catalog Number	Product
Molded Case Circuit Breaker (MCCB)	M1S	
Contactor	EX9C	
Overload Relay	Ex9R	

TYPE D

Components	Catalog Number	Product
Motor Circuit Protector (MCP)	M1M	
Contactor	EX9C	
Overload Relay	Ex9R	

Note: Please refer to Appendix A (Page 98-103) for series combination ratings for Type C and Type D combination starter types.

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
 ** CEC-Canadian Electrical Code

Molded Case Circuit Breakers

Product Overview

Features

Molded Case Circuit Breakers, 15-1200 Amperes

NOARK Electric offers a complete range of Molded Case Circuit Breakers in six frame sizes: M1 - 150A, M2 - 250A, M3 - 400A, M4 - 600A, M5 - 800A, and M6 - 1200A. Each frame size offers a range of interrupting ratings up to 100kA at 480Vac and voltage ratings up to 600Vac and 600Vdc..

- High-breaking capacity and a patented arc extinguishing design
- Bearing-type spindle reduces the operating force required to open and close the operating mechanism
- High quality compact modular design
- Fixed and adjustable trip unit settings
- Line and load lugs installed standard
- 5-Year limited warranty

Wide range of accessories:

- Alarm switch and auxiliary contact
- Shunt and under-voltage trip
- Rotary type handle
- Flange type handle



A



Certifications

- UL489 listed, File No. E355392
- CSA Standards C22.2 No. 5, File No. E355392
- IEC/EN 60947-2
- CE Compliant



Molded Case Circuit Breakers

M1-M6 Product Selection

Ratings Summary		M1							M2							M3			M4			M5			M6	
Rating	Amps @ 40° C	15-150							100-250							225-400			400-600			600-800			800-1200	
	Poles	1	2			3			1	2			3			2*,3			3			3			3	
	Frame Type	N	S	N	H	S	N	H	N	S	N	H	S	N	H	S	N	H	S	N	H	S	N	H	S	N
	Maximum Vac	480	600			600			480	600			600			600			600			600			600	
	Maximum Vdc	250	500			600			250	500			600			500			600			600			-	
Interrupting Capacity (kA rms)	240 Vac	50	50	100	150	50	100	150	50	50	100	150	50	100	150	65	100	150	65	100	150	65	100	150	65	100
	480 Vac	10	35	65	100	35	65	100	10	35	65	100	35	65	100	42	65	100	42	65	100	42	65	100	42	65
	600 Vac	-	14	20	25	14	20	25	-	14	20	25	14	20	25	18	25	30	22	30	50	22	30	50	22	42
	250 Vdc (1P)	25	-					25	-					-			-			-			-			
	500 Vdc (2P**)	-	20	35	50	-	-	-	-	20	35	50	-	-	-	35	50	65	-			-			-	
	600 Vdc (3P**)	-				20	35	50	-				20	35	50	35	50	65	35	50	65	35	50	65	-	

*3 Pole Case **Poles Connected in Series



M1H150T3L

Amps	2-Pole 80% Rated			3-Pole 80% Rated	
	Catalog Number	Trip Unit		Catalog Number	Trip Unit
15	M1S15T22L	FT/FM		M1S15T3L	FT/FM
20	M1S20T22L			M1S20T3L	
25	M1S25T22L			M1S25T3L	
30	M1S30T22L			M1S30T3L	
35	M1S35T22L			M1S35T3L	
40	M1S40T22L			M1S40T3L	
45	M1S45T22L	AT/FM		M1S45T3L	AT/FM
50	M1S50T22L			M1S50T3L	
60	M1S60T22L			M1S60T3L	
70	M1S70T22L			M1S70T3L	
80	M1S80T22L			M1S80T3L	
90	M1S90T22L			M1S90T3L	
100	M1S100T22L			M1S100T3L	
125	M1S125T22L			M1S125T3L	AT/AM
150	M1S150T22L			M1S150T3L	

A = Adjustable
T = Thermal
F = Fixed
M = Magnetic

Series M1 Line & Load Lugs: 1 Conductor #14 to #3/0 (CU) OR #12 to 3/0 (AL)

Molded Case Circuit Breakers

M1 Product Selection



M1H150T3L

	Amps	1-Pole 80% Rated		2-Pole 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit	Catalog Number	Trip Unit
M1N 1 Pole (10 kA @ 480 Vac) (50 kA @ 240 Vac) 2 Pole & 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (20 kA @ 600 Vac)	15	M1N15T1L	FT/FM	M1N15T22L	FT/FM	M1N15T3L	FT/FM
	20	M1N20T1L		M1N20T22L		M1N20T3L	
	25	M1N25T1L		M1N25T22L		M1N25T3L	
	30	M1N30T1L		M1N30T22L		M1N30T3L	
	35	M1N35T1L		M1N35T22L		M1N35T3L	
	40	M1N40T1L		M1N40T22L		M1N40T3L	
	45	M1N45T1L	FT/FM	M1N45T22L	AT/FM	M1N45T3L	AT/FM
	50	M1N50T1L		M1N50T22L		M1N50T3L	
	60	M1N60T1L		M1N60T22L		M1N60T3L	
	70	M1N70T1L		M1N70T22L		M1N70T3L	
	80	M1N80T1L		M1N80T22L		M1N80T3L	
	90	M1N90T1L		M1N90T22L		M1N90T3L	
	100	M1N100T1L		M1N100T22L		M1N100T3L	
	125	M1N125T1L		M1N125T22L		M1N125T3L	AT/AM
	150	M1N150T1L		M1N150T22L		M1N150T3L	

	Amps	2-Pole 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
M1H 2 Pole & 3 Pole (100 kA @ 480 Vac) (150 kA @ 240 Vac) (25 kA @ 600 Vac)	15	M1H15T22L	FT/FM	M1H15T3L	FT/FM
	20	M1H20T22L		M1H20T3L	
	25	M1H25T22L		M1H25T3L	
	30	M1H30T22L		M1H30T3L	
	35	M1H35T22L		M1H35T3L	
	40	M1H40T22L		M1H40T3L	
	45	M1H45T22L	AT/FM	M1H45T3L	AT/FM
	50	M1H50T22L		M1H50T3L	
	60	M1H60T22L		M1H60T3L	
	70	M1H70T22L		M1H70T3L	
	80	M1H80T22L		M1H80T3L	
	90	M1H90T22L		M1H90T3L	
	100	M1H100T22L		M1H100T3L	
	125	M1H125T22L		M1H125T3L	AT/AM
	150	M1H150T22L		M1H150T3L	

A = Adjustable
 T = Thermal
 F = Fixed
 M = Magnetic

Series M1 Line & Load Lugs: 1 Conductor #14 AWG - #3/0 AWG, (1) Cu wire or #12 AWG - #3/0 AWG, (1) Al wire

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Molded Case Circuit Breakers

M2 Product Selection



M2N250T3L

M2S 2 Pole & 3 Pole (35 kA @ 480 Vac) (50 kA @ 240 Vac) (14 kA @ 600 Vac)	Amps	2-Pole 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
	100	M2S100T22L	AT/AM	M2S100T3L	AT/AM
	125	M2S125T22L		M2S125T3L	
	150	M2S150T22L		M2S150T3L	
	175	M2S175T22L		M2S175T3L	
	200	M2S200T22L		M2S200T3L	
	225	M2S225T22L		M2S225T3L	
	250	M2S250T22L		M2S250T3L	

M2N 1 Pole (10 kA @ 480 Vac) (50 kA @ 240 Vac) 2 Pole & 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (20 kA @ 600 Vac)	Amps	1-Pole 80% Rated		2-Pole 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit	Catalog Number	Trip Unit
	100	M2N100T1L	FT/FM	M2N100T22L	AT/AM	M2N100T3L	AT/AM
	125	M2N125T1L		M2N125T22L		M2N125T3L	
	150	M2N150T1L		M2N150T22L		M2N150T3L	
	175	M2N175T1L		M2N175T22L		M2N175T3L	
	200	M2N200T1L		M2N200T22L		M2N200T3L	
	225	M2N225T1L		M2N225T22L		M2N225T3L	
	250	M2N250T1L		M2N250T22L		M2N250T3L	

M2H 2 Pole & 3 Pole (100 kA @ 480 Vac) (150 kA @ 240 Vac) (25 kA @ 600 Vac)	Amps	2-Pole* 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
	100	M2H100T2L	AT/AM	M2H100T3L	AT/AM
	125	M2H125T2L		M2H125T3L	
	150	M2H150T2L		M2H150T3L	
	175	M2H175T2L		M2H175T3L	
	200	M2H200T2L		M2H200T3L	
	225	M2H225T2L		M2H225T3L	
	250	M2H250T2L		M2H250T3L	

A = Adjustable
 T = Thermal
 F = Fixed
 M = Magnetic
 *3 Pole Case

Line & Load Lugs: #3 AWG - 300kcmil, (1) Cu or Al wire

Molded Case Circuit Breakers

M3-M4 Product Selection

M3S 2 Pole & 3 Pole (42 kA @ 480 Vac) (65 kA @ 240 Vac) (18 kA @ 600 Vac)	Amps	2-Pole* 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
	225	M3S225T2L	AT/AM	M3S225T3L	AT/AM
	250	M3S250T2L		M3S250T3L	
	300	M3S300T2L		M3S300T3L	
	350	M3S350T2L		M3S350T3L	
	400	M3S400T2L		M3S400T3L	

M4S 3 Pole (42 kA @ 480 Vac) (65 kA @ 240 Vac) (22 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	400	M4S400T3L	AT/AM
	500	M4S500T3L	
	600	M4S600T3L	

M3N 2 Pole & 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (25 kA @ 600 Vac)	Amps	2-Pole* 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
	225	M3N225T2L	AT/AM	M3N225T3L	AT/AM
	250	M3N250T2L		M3N250T3L	
	300	M3N300T2L		M3N300T3L	
	350	M3N350T2L		M3N350T3L	
	400	M3N400T2L		M3N400T3L	

M4N 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (30 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	400	M4N400T3L	AT/AM
	500	M4N500T3L	
	600	M4N600T3L	

M3H 2 Pole & 3 Pole (100 kA @ 480 Vac) (150 kA @ 240 Vac) (30 kA @ 600 Vac)	Amps	2-Pole* 80% Rated		3-Pole 80% Rated	
		Catalog Number	Trip Unit	Catalog Number	Trip Unit
	225	M3H225T2L	AT/AM	M3H225T3L	AT/AM
	250	M3H250T2L		M3H250T3L	
	300	M3H300T2L		M3H300T3L	
	350	M3H350T2L		M3H350T3L	
	400	M3H400T2L		M3H400T3L	

M4H 3 Pole (100 kA @ 480 Vac) (150 kA @ 240 Vac) (50 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	400	M4H400T3L	AT/AM
	500	M4H500T3L	
	600	M4H600T3L	

Line & Load Lugs: #4/0 AWG - 600kcmil,
(1) Cu or Al wire

Line & Load Lugs: #2/0 AWG - 500kcmil, (2) Cu or Al wire

A = Adjustable
T = Thermal
F = Fixed
M = Magnetic
*3 Pole Case

Molded Case Circuit Breakers

M5-M6 Product Selection

M5S 3 Pole (42 kA @ 480 Vac) (65 kA @ 240 Vac) (22 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	600	M5S600T3L	AT/AM
	700	M5S700T3L	
	800	M5S800T3L	

M6S* 3 Pole (42 kA @ 480 Vac) (65 kA @ 240 Vac) (22 kA @ 600 Vac)	Amps	3-Pole		
		80% Rated	100% Rated	
		Catalog Number	Catalog Number	Trip Unit
	800	M6S800E3W4L	M6S800E3W4LF	ET
	1000	M6S1000E3W4L	M6S1000E3W4LF	
	1200	M6S1200E3W4L	M6S1200E3W4LF	

M5N 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (30 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	600	M5N600T3L	AT/AM
	700	M5N700T3L	
	800	M5N800T3L	

M6N* 3 Pole (65 kA @ 480 Vac) (100 kA @ 240 Vac) (42 kA @ 600 Vac)	Amps	3-Pole		
		80% Rated	100% Rated	
		Catalog Number	Catalog Number	Trip Unit
	800	M6N800E3W4L	M6N800E3W4LF	ET
	1000	M6N1000E3W4L	M6N1000E3W4LF	
	1200	M6N1200E3W4L	M6N1200E3W4LF	

M5H 3 Pole (100 kA @ 480 Vac) (150 kA @ 240 Vac) (50 kA @ 600 Vac)	Amps	3-Pole 80% Rated	
		Catalog Number	Trip Unit
	600	M5H600T3L	AT/AM
	700	M5H700T3L	
	800	M5H800T3L	

Series M6 Line & Load Lugs:

- 1000A Max - #3/0 AWG - 750kcmil, (3) Cu or Al wire
- 1200A - #3/0 AWG - 500kcmil, (4) Cu or Al wire

Series M5 Line & Load Lugs:

- 700A Max - 250kcmil - 600kcmil, (2) Cu or Al wire
- 800A - #4/0 AWG - 500kcmil, (3) Cu or Al wire

A = Adjustable
T = Thermal
F = Fixed
M = Magnetic
ET= Electronic

* M6S and M6N offers ground fault protection in 3P-4W system. External neutral current sensor, NCS26N is required for ground fault protection in 3P-4W system. NCS26N is ordered separately. (See page 17 for more information)

Molded Case Circuit Breakers

M1-M6 Technical Data

Ratings & Specifications		M1						M2							
Amps @ 40° C		15-150						100-250							
Poles		1	2		3			1	2		3				
Frame Type		N	S	N	H	S	N	H	N	S	N	H*	S	N	H
Maximum Vac		480	600		600			480	600		600				
Maximum Vdc		250	500		500			250	500		500				
Interrupting Capacity (kA rms)															
240 Vac		50	50	100	150	50	100	150	50	50	100	150	50	100	150
480 Vac		10	35	65	100	35	65	100	10	35	65	100	35	65	100
600 Vac		-	14	20	25	14	20	25	-	14	20	25	14	20	25
250 Vdc 1 Pole		25	-					25	-						
500 Vdc 2 Poles**		-	20	35	50	20	35	50	-	20	35	50	20	35	50
600 Vdc 3 Poles**		-				20	35	50	-				20	35	50
*3 Pole Case															
**Poles Connected in Series															
General Specifications															
Insulation Voltage (V)		800 Vac						800 Vac							
Impulse Withstand Voltage (Vimp)		8k Vac						8k Vac							
Operational Voltage (Ve)(IEC)		690 Vac						690 Vac							
Operational Voltage (Ve)(UL)		600 Vac						600 Vac							
Utilization Category		A						A							
Mechanical Operating Cycles		10,000						10,000							
Electrical Operating Cycles		6,000						6,000							
Trip Unit Type		FT/FM	15~45 FT/FM 50~150A AT/FM		15~45A FT/FM 50~100A AT/FM 125~150A AT/AM		FT/ FM	AT/AM							
A=Adjustable / T=Thermal / F=Fixed / M=Magnetic															
Dimensions LxWxD in (mm)	1 Pole	6.46x1.4x3.33 (164x35x84.5)						7.17x1.57x3.47 (182x40x88)							
	2 Pole	6.46x2.44x3.33 (164x62x84.5)						7.17x2.95x3.47 (182x75x88)							
	2 Pole*	6.46x3.54x3.33 (164x90x84.5)						7.17x4.13x3.47 (182x105x88)							
	3 Pole														
	4 Pole							-							
Wieght lb (kg)	1 Pole	1.47 (0.67)						1.76 (0.8)							
	2 Pole	2.53 (1.15)						3.3 (1.5)							
	2 Pole*	3.17 (1.67)						3.75 (1.70)							
	3 Pole	3.68 (1.67)						4.41 (2.00)							
	4 Pole							-							
Cable Lug Size 75°C Cu or Al Wire Only AWG (mm²)		1-Hole, #14-3/0 (2.5-95) Cu OR 1-Hole, #12-3/0 (2.5-95) Al						1-Hole, #3-300 kcmil (35-150)							
Lug Torque in-lb (Nm)		89 (10)						230 (23)							

Molded Case Circuit Breakers

M1-M6 Technical Data

Ratings & Specifications		M3			M4			M5			M6		
Amps @40° C		225-400			400-600			600-800			800-1200		
Poles		2*,3			2*,3			2*,3,4			3,4		
Frame Type		S	N	H	S	N	H	S	N	H	S	N	
Maximum Vac		600			600**			600**			600		
Maximum Vdc											-		
Interrupting Capacity (kA rms)													
240 Vac		65	100	150	65	100	150	65	100	150	65	100	
480 Vac		42	65	100	42	65	100	42	65	100	42	65	
600 Vac		18	25	30	22	30	50	22	30	50	22	42	
250 Vdc 1 Pole		-			-			-			-		
500 Vdc 2 Poles **		35	50	65	35	50	65	35	50	65			
600 Vdc 3 Poles**		35	50	65	35	50	65	35	50	65			
*3 Pole Case													
**Poles Connected in Series													
General Specifications													
Insulation Voltage (Vi)		800 Vac			800 Vac			800 Vac			800 Vac		
Impulse Withstand Voltage (Vimp)		8k Vac			8k Vac			8k Vac			8k Vac		
Operational Voltage (Ve) (IEC)		690 Vac			690 Vac			690 Vac			690 Vac		
Operational Voltage (Ve) (UL)		600 Vac			600 Vac			600 Vac			600 Vac		
Utilization Category		A			A			A			A		
Mechanical Operating Cycles		8,000						3,000					
Electrical Operating Cycles		5,000						500					
Trip Unit Type		AT/AM			AT/AM			AT/AM			Electronic*		
		-											
Dimensions LxWxD in (mm)		2 Pole*	11.22x5.51x4.59 (285x140x116.5)			12.32x7.68x5.43 (313x195x138)			16.18x7.68x7.58 (411x195x192.5)			17.72x8.27x6.6 (450x210x167.6)	
		3 Pole											
		4 Pole	-						16.18x10.2x7.58 (411x260x192.5)			17.72x11.43x6.6 (450x280x167.6)	
Weight lb (kg)		2 Pole*	8.97 (4.07)			20.94 (9.5)			27.8 (12.5)			-	
		3 Pole	13.45 (6.1)			25.35 (11.5)			33.18 (15.05)			55.56 (25.2)	
		4 Pole	-						43.43 (19.7)			69.67 (31.6)	
Cable Lug Size 75°C CU or AL Wire Only AWG (mm²)		Standard: 1-Hole, #4/0-600 kcmil (95-240)			2-Holes #2/0-500 kcmil (2x 95-185)			2-Holes 250-600 kcmil (120-300)			3-Holes #3/0-750 kcmil (95-300)		
		2-Holes #3-250 kcmil (35-120)						3-Holes #4/0-500 kcmil (100-250)			4-Holes #3/0-500 kcmil (95-240)		
Lug Torque in-lb (Nm)		310 (35)						398 (45)			310 (35)		

*Electronic trip units are equipped with LSIG protection

Molded Case Switches

Product Overview

Features

Molded Case Switches, 100-1200 Amperes

NOARK Electric offers a complete range of Molded Case Switches in six frame sizes: M1 - 150A, M2 - 250A, M3 - 400A, M4 - 600A, M5 - 800A, and M6 - 1200A. Each frame size offers a range of interrupting ratings at 240-690 Vac and 250-600 Vdc. Molded Case Switches are only used as disconnect switches.

Features:

- Instantaneous trip ability and a patented arc extinguishing design
- Bearing-type spindle reduces the operating force required to open and close the operating mechanism
- High-quality compact modular design
- 5-Year limited warranty

Wide range of accessories:

- Alarm switch and auxiliary contact
- Shunt and under-voltage trip
- Rotary type handle
- Flange type handle



B



Certifications

- UL489 listed, File No. E355396
- CSA Standards C22.2 No. 5, File No. E355396
- IEC/EN 60947-2
- CE Compliant



Molded Case Switches

Line/Load Lug Connection

- Terminal lugs are provided standard on all NOARK MCCBs.
- Additional terminal lug configurations available. See pages 22-23



Withstand Rating* (kA rms)	Rated Amperes (A)	Line/Load Lug Connection		Lug Configuration
		2-Pole	3-Pole	
		Catalog Number		
M1D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (20 kA @ 600 Vac)	100	M1D1002L	M1D1003L	1 Conductor
	150	M1D1502L	M1D1503L	#14 to #3/0 AWG Cu OR #12 to #3/0 AWG Al
M2D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (20 kA @ 600 Vac)	225	M2D2252L	M2D2253L	1 Conductor
	250	M2D2502L	M2D2503L	#3 AWG to 300kcmil Cu or Al
M3D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (25 kA @ 600 Vac)	400	-	M3D4003L	1 Conductor #4/0 AWG to 600 kcmil Cu or Al
M4D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	600	-	M4D6003L	2 Conductor #2/0 AWG to 500 kcmil Cu or Al
M5D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (30 kA @ 600 Vac)	800	-	M5D8003L	3 Conductor #4/0 AWG to 500kcmil Cu or Al
M6D (100 kA @ 240 Vac) (65 kA @ 480 Vac) (42 kA @ 600 Vac)	1000	-	M6D10003LF	3 Conductor #3/0 AWG to 750kcmil Cu or Al
	1200	-	M6D12003LF	4 Conductor #3/0 AWG to 500kcmil Cu or Al

Molded Case Switches

M1D - M6D Technical Data

		M1D	M2D	M3D	M4D	M5D	M6D
Rated Current (A)		100 - 150	225 - 250	400	600	800	1000 - 1200
Number of Poles		2, 3		3			
Switch Type		M1D	M2D	M3D	M4D	M5D	M6D
Rated Voltage 50/60 Hz	Vac	600					
	Vdc	600					
Withstand Rating* (kA rms)							
Circuit Breaker Ratings UL 489- -C-SA C22.2 (kA rms) Vac 50/60 Hz	240 Vac	100	100	100	100	100	100
	480 Vac	65	65	65	65	65	65
	600 Vac	20	20	25	30	30	42
	500 Vdc 2-Pole	35	35	50	50	50	-
	600 Vdc 3-Pole	35	35	50	50	50	-
Circuit Breaker Ratings IEC 60947-2	220 / 240 Vac	100	100	100	100	100	85 (60) Icu/Ics
	380 / 415 Vac						
	660 / 690 Vac	8	10	15	15	15	30
Ultimate Breaking Capacity (Icu = 100% Ics) (kA rms)	500 Vdc 3-Pole	35	35	50	50	-	-
	500 Vdc 2-Pole	35	35	50	50	50	-
Trip Current (A)		15xIn	12xIn	12xIn	10xIn	10xIn	15xIn
Connection							
Line/Load Lug Connection		■					
Insulation Voltage (Vi)		800 Vac					
Impulse Withstand Voltage (Vimp)		8 kVac					
Operational Voltage (Ve)	UL	600 Vac					
Mechanical Operating Cycles		10,000		8,000		3,000	
Electrical Operating Cycles		6,000		5,000		500	
Dimensions LxWxD in		6.46 x 3.54 x 3.33	7.17 x 4.13 x 3.47	11.22 x 5.51 x 4.59	12.32 x 7.68 x 5.43	16.18 x 7.68 x 7.58	17.72x8.27x6.6
Weight of Unit lb	2-Pole	3.17	3.75	-	-	-	-
	3-Pole	3.68	4.41	13.45	25.35	33.18	55.56
Lugs lb-in (N.m)		89 (10)	230 (23)	310 (35)		398 (45)	310 (35)

*NOTE: Molded Case Switches do not provide branch circuit protection and must be protected by an upstream OCPD (fuse or circuit breaker). The withstand rating is provided for coordination purposes and refers to the fault, at rated voltage, that the molded case switch can withstand without damage when protected by a circuit breaker or fuse with an equal continuous current rating.

Molded Case Motor Circuit Protectors

Product Overview

Features

Molded Case Motor Circuit Protectors, 3-1200 Amperes

NOARK Electric offers a complete range of 3 pole Molded Case Motor Circuit Protectors (MCPs, magnetic or short circuit protection only) which are used to protect the cables feeding three phase motors in six frame sizes: M1M - 150A, M2M - 250A, M3M - 400A, M4M - 600A, M5M - 800A, and M6M - 1200A. Each frame size offers a range of interrupting ratings at 240-690 Vac and 250-600 Vdc.

The National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

A motor circuit protector serves as means of disconnecting power and short circuit protection for the cables.



Certifications

- UL489 Recognized Component, File No. E355392
- CSA Standard C22.2 No. 5, File No. E355392
- IEC/EN 60947-2
- CE Compliant



Molded Case Motor Circuit Protectors

Line/Load Lug Connection

- Additional terminal lug configurations available. See pages 22-23
- Terminal lugs are provided standard on all NOARK MCCBs.



Rated Amperage (A)	Magnetic Trip Setting Range	Line/Load Lug Connection		Lug Configuration
		S Interrupting	N Interrupting	
		50kA @ 240 Vac 35kA @ 480 Vac 14kA @ 600 Vac	100kA @ 240 Vac 65kA @ 480 Vac 20kA @ 600 Vac	
		Catalog Number		
3	7x-11x	M1MS03T3L	M1MN03T3L	1 Conductor #14 to #3/0 AWG Cu OR #12 to #3/0 AWG Al
7	5x-10x	M1MS07T3L	M1MN07T3L	
15	5x-10x	M1MS15T3L	M1MN15T3L	
30	5x-11x	M1MS30T3L	M1MN30T3L	
50	5x-11x	M1MS50T3L	M1MN50T3L	
70	5x-11x	M1MS70T3L	M1MN70T3L	
100	5x-11x	M1MS100T3L	M1MN100T3L	
150	5x-11x	M1MS150T3L	M1MN150T3L	
250	5x-11x	M2MS250T3L	M2MN250T3L	1 Conductor #3 AWG to 300kcmil Cu or Al

Rated Amperage (A)	Magnetic Trip Setting Range	Line/Load Lug Connection		Lug Configuration
		S Interrupting	N Interrupting	
		65kA @ 240 Vac 42kA @ 480 Vac 18kA @ 600 Vac	100kA @ 240 Vac 65kA @ 480 Vac 25kA @ 600 Vac	
		Catalog Number		
400	5x-11x	M3MS400T3L	M3MN400T3L	1 Conductor #4/0 AWG to 600kcmil Cu or Al

Rated Amperage (A)	Magnetic Trip Setting Range	Line/Load Lug Connection			Lug Configuration
		S Interrupting	N Interrupting	N Interrupting	
		65kA @ 240 Vac 42kA @ 480 Vac 22kA @ 600 Vac	100kA @ 240 Vac 65kA @ 480 Vac 30kA @ 600 Vac	100kA @ 240 Vac 65kA @ 480 Vac 42kA @ 600 Vac	
		Catalog Number			
600	5x-11x	M4MS600T3L	M4MN600T3L	-	2 Conductor #2/0 AWG to 500kcmil Cu or Al
800	5x-11x	M5MS800T3L	M5MN800T3L	-	3 Conductor #4/0 AWG to 500kcmil Cu or Al
1200	2x-12x	M6MS1200E3LF	-	M6MN1200E3LF	4 Conductor #3/0 AWG to 500kcmil Cu or Al

Molded Case Motor Circuit Protectors

M1M - M6M Technical Data

		M1M		M2M		M3M		M4M		M5M		M6M	
Current Range (A)		3-150		250		400		600		800		1200	
Number of Poles		3											
Breaker Type		S	N	S	N	S	N	S	N	S	N	S	N
Rated Voltage 50/60 Hz Vac		600											
Interrupting Capacity (kA)													
Circuit Breaker Ratings	240 Vac	50	100	50	100	65	100	65	100	65	100	65	100
	480 Vac	35	65	35	65	42	65	42	65	42	65	42	65
	600 Vac	14	20	14	20	18	25	22	30	22	30	22	42
Magnetic Trip Units	A = Adjustable M = Magnetic	AM											
Accessories													
Alarm Switch													
Auxiliary Contact													
Shunt Trip													
Under-Voltage Trip													
Handle Lock													
Flange Type Handle													
Rotary Type Handle													
Connection													
Line/Load Lug Connection													
Dimensions In (mm)		6.46x3.54x3.33 (164x90x34.5)		7.17x4.13x3.47 (182x105x38)		11.22x5.51x4.59 (285x140x116.5)		12.32x7.68x5.43 (313x195x138)		16.18x7.68x7.58 (411x195x192.5)		17.72x8.27x6.6 (450x210x167.6)	
Weight Lb (kg)		3.68 (1.67)		4.41 (2)		13.45 (6.1)		25.35 (11.5)		33.18 (15.05)		55.56 (25.2)	

Molded Case Circuit Breakers

Temperature & Altitude Compensation

Rated Current	Temperature	+40°C	+50°C	+60°C	+70°C
M1	15A	15	14.3	12.9	12
	20A	20	19	17.2	16
	25A	25	24	21.5	20
	30A	30	28.1	25.8	24
	35A	35	32.8	30.1	28
	40A	40	38	34.4	32
	45A	45	42.5	48.7	36
	50A	50	47.5	43	40
	60A	60	57	51.6	48
	70A	70	66.5	60.2	56
	80A	80	76	68.8	64
	90A	90	85.5	77.4	72
	100A	100	95	86	80
	125A	125	112.5	107.5	100
	150A	150	135	129	120
M2	125A	125	112.5	100	87.5
	150A	150	135	120	105
	175A	175	166.2	157.5	148.7
	200A	200	190	180	170
	225A	225	202.5	184.5	168
	250A	250	237.5	225	195
M3	250A	250	237.5	212.5	187.5
	300A	300	285	255	225
	350A	350	332.5	297.5	262.5
	400A	400	380	340	300
M4	400A	400	380	360	340
	500A	500	465	430	400
	600A	600	558	516	480
M5	600A	600	558	516	480
	700A	700	644	595	546
	800A	800	736	680	624
M6	800A	800	800	800	800
	1000A	1000	1000	1000	900
	1200A	1200	1080	1080	960

Altitude m		2000m	3000m	4000m	5000m
I _n		1×I _n	0.96×I _n	0.93×I _n	0.9×I _n
U _e (V)	AC/DC	600	480	420	360
Dielectric properties (V)	AC/DC	2400	2000	1680	1440
Rated insulation impulse voltage U _{imp} (kV)		8	8	8	8

Accessories For MCCB/MCP/MCS

Internal Accessories

Alarm Switch (AL)




Function:

- Sends a signal when the circuit breaker trips
- UL File Number E355392

1

Auxiliary Contact (AX)



Function:


- Indicates the state of a circuit breaker (on/off)
- UL File Number E355392

2

Accessory Description	Rated Operational Voltage	Rated Operational Current	Catalog Number
Alarm Switch 1NO / 1NC	240/480 Vac, 110/220 Vdc	0.25A @ 110 Vdc	AL/AX21P*
Auxiliary Contact 1NO / 1NC		0.25A @ 220 Vdc 5A @ 240 Vac 2A @ 480 Vac*	

*AL/AX21P is an Alarm switch when inserted in position '1' on the breaker and Auxiliary contact when inserted in position '2' on the breaker


Shunt Release (SHT)




Function:

- Allows circuit breaker to be remotely operated
- Response Voltage, Pick-Up: U_s 70-110%
- Opening Time: Interrupts Automatically ≥ 10 ms, ≤ 60 ms
- UL File Number E355392

3

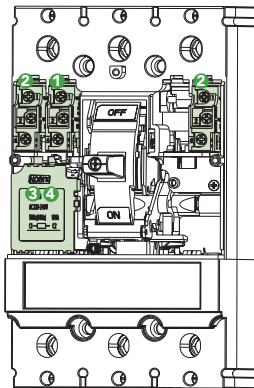

Under-Voltage Trip (UVT)



Function:

- Prevents circuit breaker from closing during an under-voltage situation
- Response Voltage, Drop: U_e 35-70%
- Response Voltage, Pick-Up: U_e 85-110%
- Opening Time: Interrupts Automatically ≥ 10 ms, ≤ 60 ms
- UL File Number E355392

4

Accessory Description	Frame Size	Voltage	Catalog Number
Shunt Trip	M1	100-130 Vac	SHT21NA
		220-240 Vac	SHT21NB
		12 Vdc	SHT21ND
		24 Vdc	SHT21NI
	M2-M3	110 - 125 Vdc	SHT21NG
		100-130 Vac	SHT22NA
		220-240 Vac	SHT22NB
		12 Vdc	SHT22NI
	M4-M5	24 Vdc	SHT22NE
		110 - 125 Vdc	SHT22NG
		100-130 Vac	SHT24NA
		220-240 Vac	SHT24NB
	M6	12 Vdc	SHT24NI
		24 Vdc	SHT24NE
		110 - 125 Vdc	SHT24NG
		100 - 130 Vac	SHT26NA
	M6	220-240 Vac	SHT26NB
		480-500 Vac	SHT26ND
		24-30 Vdc	SHT26NE
		110 - 125 Vdc	SHT26NG

Accessory Description	Frame Size	Voltage	Catalog Number
Under-Voltage Trip	M1	110-127 Vac	UVT21NA
		220-240 Vac	UVT21NB
		24-30 Vdc	UVT21ND
	M2-M3	110-127 Vac	UVT22NA
		220-240 Vac	UVT22NB
		24-30 Vdc	UVT22ND
	M4-M5	110-127 Vac	UVT24NA
		220-240 Vac	UVT24NB
		24-30 Vdc	UVT24ND
	M6	110-127 Vac	UVT26NA
		220-240 Vac	UVT26NB
		480-500 Vac	UVT26NC1


Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Accessories For MCCB

External Accessories: Neutral Current Sensor




NCS26N is required for ground fault protection in 3P-4W system. NCS26N is ordered separately.

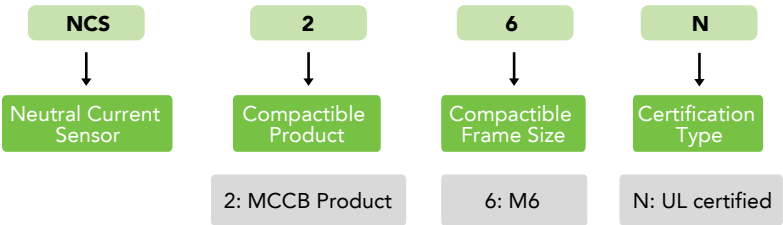

NCS26N	
Rated Operational Current (A)	800 - 1200
Induction Ratio (A-mV)	1000 : 137.5
Operational Temperature	-40°C ~ +70°C
Cable size	14 AWG ~ 24 AWG
Standards	UL489, UL1998 (Software)
Weight (kg)	1.6

C


M6 3P4W protects circuit from ground fault, without cutting off the circuit due to faults on neutral. According to NEC Article 250.20(D) - "In three-phase, four-wire power systems, the neutral point shall not be required to be connected to an overcurrent device, but measures shall be taken to ensure that the neutral point is connected to the grounding system in a manner that establishes reliable fault current path."

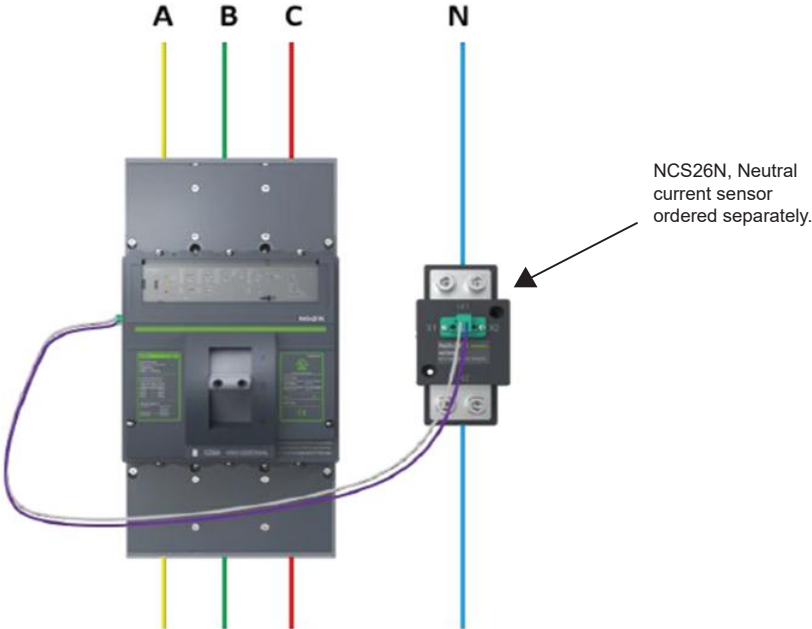

Accessories For MCCB/MCP/MCS

External Accessories: Extended Rotary Handle

Shown: NEH2R2 handle with ES32A extended handle shaft and HM1A operating mechanism.

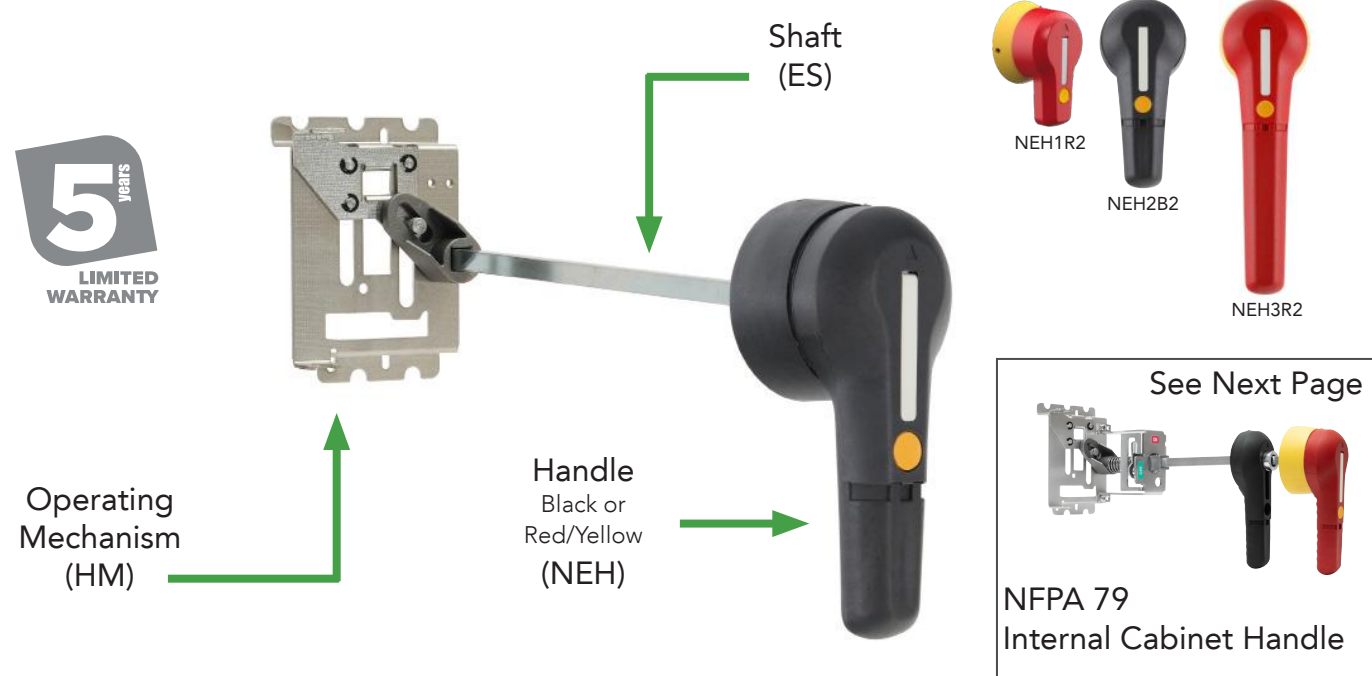

NEMA extended rotary handle mechanism selection consists of 3 components (sold separately):
operating mechanism (HM), shaft (ES), and rotary handle (NEH).

- UL File Numbers E484125 and E355392

Selection Process

- Step 1.** Identify breaker frame size to select corresponding operating mechanism (HM).
Step 2. Select shaft (ES) based on the length needed and diameter required.
Step 3. Select handle (NEH) with the matching shaft diameter based on desired color combination and UL rating.

Step 1

Operating Mechanism Select One			
No of Poles	Frame Size	Use Shaft Diameter	Catalog Number
2	M1 / M2	10mm ²	HMD1A / HMD2A
	M1 / M2	10mm ²	HMD1A / HMD2A
3	M1	10mm ²	HM1A
	M2	10mm ²	HM2A
	M1	10mm ²	HM1A
	M2	10mm ²	HM2A
	M3	12mm ²	HM3B
	M4 / M5	12mm ²	HM4B
	M6	12mm ²	HOM6B

Step 2


Shaft Select One		
Shaft Diameter	Length	Catalog Number
10mm ² M1 / M2	7.9 inch (200mm)	ES20C
	12.6 inch (320mm)	ES32C
	19.7 inch (500mm)	ES50C
10mm ² M1 / M2	7.9 inch (200mm)	ES20A
	12.6 inch (320mm)	ES32A
	19.7 inch (500mm)	ES50A
10mm ² M1 / M2	7.9 inch (200mm)	ES20C
	12.6 inch (320mm)	ES32C
	19.7 inch (500mm)	ES50C
10mm ² M1 / M2	7.9 inch (200mm)	ES20A
	12.6 inch (320mm)	ES32A
	19.7 inch (500mm)	ES50A
12mm ² M3 / M4 / M5 / M6	7.9 inch (200mm)	ES20B
	12.6 inch (320mm)	ES32B
	19.7 inch (500mm)	ES50B

Step 3

4/4X Handle Select One			
Frame Size	Use Shaft Diameter	Color	Catalog Number
M1 / M2	6mm ²	Black	NEH1B2
		Red / Yellow	NEH1R2
M1 / M2	10mm ²	Black	NEH2B2
		Red / Yellow	NEH2R2
M1 / M2	6mm ²	Black	NEH1B2
		Red / Yellow	NEH1R2
M1 / M2	10mm ²	Black	NEH2B2
		Red / Yellow	NEH2R2
M3 / M4 / M5 / M6	12mm ²	Black	NEH3B2
		Red / Yellow	NEH3R2

Accessories For MCCB/MCP/MCS

External Accessories: NFPA 79 Internal Cabinet Handle

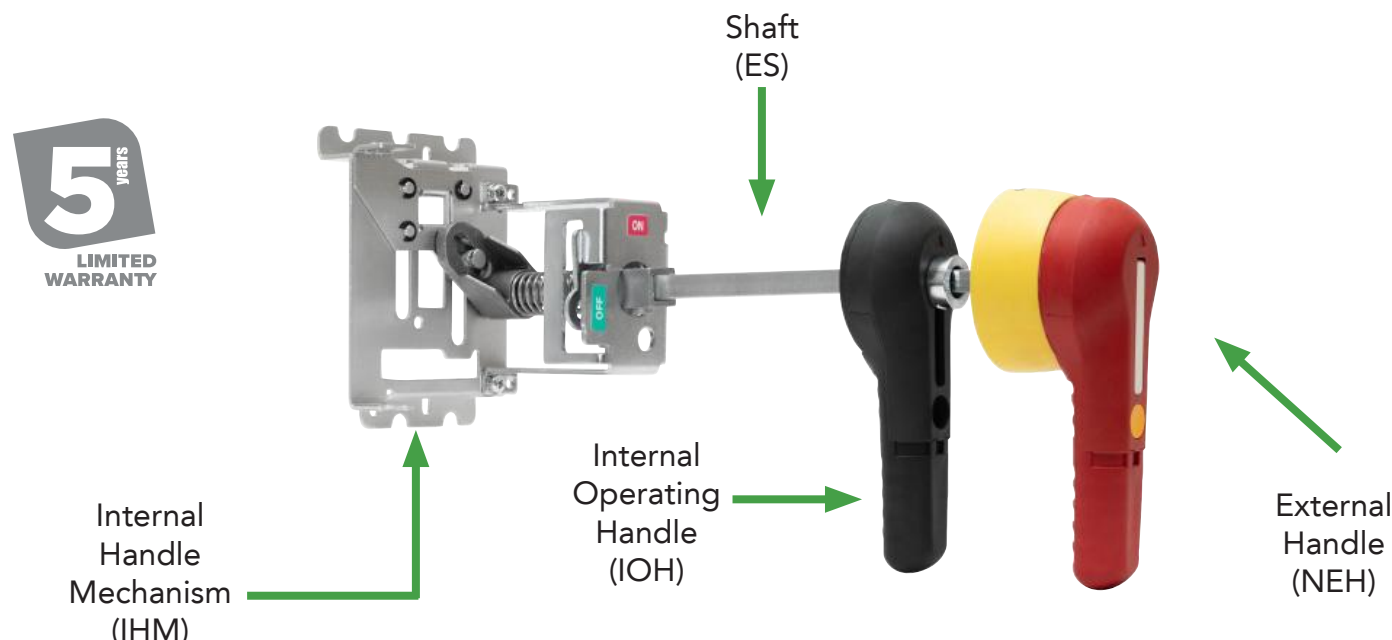

- UL File Numbers E484125 and E355392

Selection Process

- Step 1.** Identify breaker frame size to select corresponding internal handle mechanism (IHM).
- Step 2.** Select shaft (ES) based on the length needed and diameter required.
- Step 3.** Select the internal operating handle (IOH) based on the breaker frame size.
- Step 4.** Select handle (NEH) with the matching shaft diameter based on desired color combination and UL rating.

Step 1

Internal Handle Mechanism		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1	10mm ²	IHM1
M2	10mm ²	IHM2
M3	12mm ²	IHM3
M4 or M5	12mm ²	IHM4

+

Step 2

Shaft		
Select One		
Shaft Diameter	Length	Catalog Number
10mm ² M1 or M2	7.9 inch (200mm)	ES20A
	12.6 inch (320mm)	ES32A
	19.7 inch (500mm)	ES50A
12mm ² M3, M4 or M5	7.9 inch (200mm)	ES20B
	12.6 inch (320mm)	ES32B
	19.7 inch (500mm)	ES50B

+

Step 3

Internal Operating Handle		
Select One		
Frame Size	Use Shaft Diameter	Catalog Number
M1 or M2	10mm ²	IOH2
M3, M4 or M5	12mm ²	IOH3

+


Step 4

4/4X Handle			
Select One			
Frame Size	Use Shaft Diameter	Color	Catalog Number
M1 or M2	10mm ²	Black	NEH2B2
		Red / Yellow	NEH2R2
M3, M4 or M5	12mm ²	Black	NEH3B2
		Red / Yellow	NEH3R2

Accessories For MCCB/MCP/MCS

External Accessories: M1-M6 Flange Handle Mechanism

Green Highlight = Most Popular

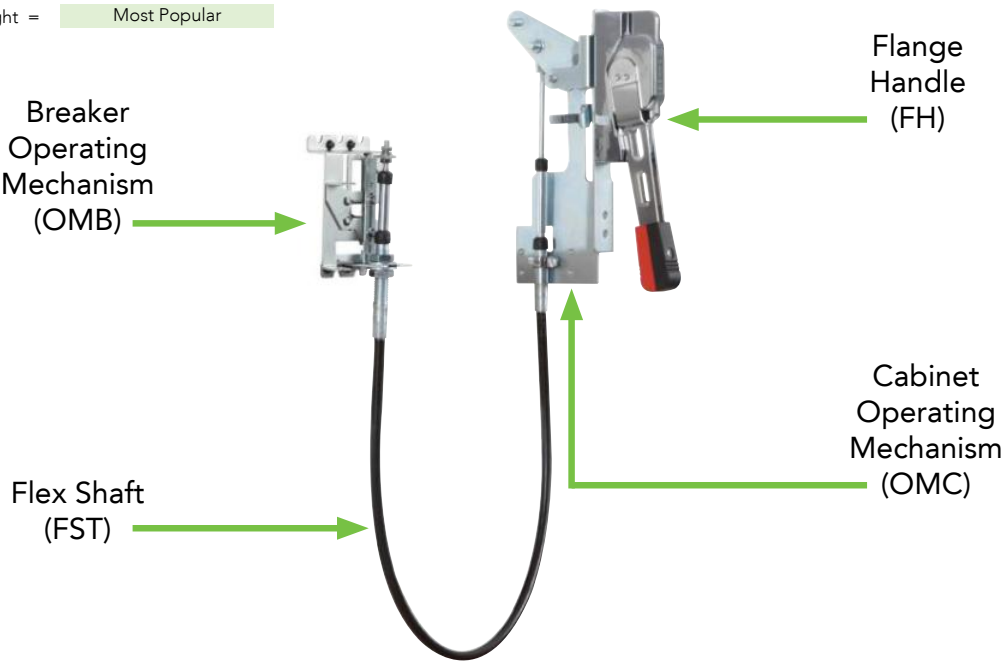

M1-M5 Flange handle mechanism selection is separated into 4 components (sold separately): flange handle (FH), flex shaft (FST), cabinet operating mechanism (OMC) and breaker operating mechanism (OMB). NOARK UL MCCB frame size: M1 (15-150A), M2 (175-250A), M3 (300-400A), M4 (500-600A), M5 (700-800A), and M6 (800-1200A).

Selection Process

UL File Numbers E355392, E484125

- Step 1. Select desired flange handle.
- Step 2. Select cabinet operating mechanism.
- Step 3. Select breaker operating mechanism based on frame size.
- Step 4. Select flex shaft* based on enclosure requirements.

Step 1

Flange Handle		
Select One		
Frame Size	Handle Type / Length	Catalog Number
M1 / M2 / M3 / M4 / M5 / M6	Compact fixed length (9.57 in) UL 4, 4X Rated	FH4XC
	Adjustable length (11.81 - 13.62 in) UL 4, 4X Rated	FH4XD

Step 2

Cabinet Operating Mechanism	
Select One	
Frame Size	Catalog Number
M1 / M2 / M3 / M4 / M5 / M6	OMC

Step 3

Breaker Operating Mechanism	
Select One	
Frame Size	Catalog Number
M1	OMB21
M2	OMB22
M3	OMB23
M4 / M5	OMB24
M6	OMB26

Step 4

Flex Shaft*		
Select One		
Frame Size	Length	Catalog Number
M1 / M2 / M3 / M4 / M5	3 feet	FST3
	4 feet	FST4
	5 feet	FST5
	6 feet	FST6
M6	4 feet	FSB4
	5 feet	FSB5
	6 feet	FSB6
	7 feet	FSB7

* When selecting the length of shaft, ensure minimum bending radius of 6 inches is maintained to operate properly. Contact NOARK if additional lengths are needed.

Accessories For MCCB/MCP/MCS

Connection Hardware: Terminal Lugs



1-Hole

- Terminal lugs included with molded case circuit breakers standard. Listed individually for replacement purposes only.
- Sold Individually
Example: Line / Load Terminal Lugs for 3-pole breaker requires six
- UL File Number E349009

Accessory Description	Frame Size	Configuration	Specifications	Catalog Number
Terminal Lugs	M1 (150A)	1-Hole Standard	75°C #14 AWG~#3/0 AWG* (1) Cu wire #12 AWG~#3/0 AWG (1) Al wire	LTC21NAA
	M2 (250A)	1-Hole Standard	75°C #3 AWG~300kcmil (1) Cu or Al wire	LTC22NAA
	M3 (400A)	1-Hole Standard	75°C #4/0 AWG~750 kcmil (1) Cu or Al wire	LTC23NAA
		2-Hole** Optional	75°C #3 AWG~250 kcmil (2) Cu or Al wire	LTC23NBA
	M4 (600A)	2-Hole Standard	75°C #2/0 AWG~500 kcmil (2) Cu or Al wire	LTC24NBA
	M5 (800A)	2-Hole (700A) Standard	75°C 250kcmil-600kcmil (2) Cu or Al wire	LTC25NBA
		3-Hole (800A) Standard	75°C #4/0 AWG-500kcmil (3) Cu or Al wire	LTC25NCA
	M6 (1200A)	3- Hole (800-1000A) Standard	75°C #3/0 AWG-750kcmil (3) Cu or Al wire	LTC26NCA
		4-Hole (1200A) Standard	75°C #3/0 AWG-500kcmil (4) Cu or Al wire	LTC26NDA

NOTE: At 100% rated breaker, 90°C wire are used with ampacity based on 75°C rating

** Requires external terminal cover part no. TC23NB ordered separately

* AWG = American Wire Gauge



Accessory Description	Type	Configuration	Catalog Number
Terminal Cover	M3	2-Holes	TC23NB

- Required for installation of M3 2-Hole terminal LTC23NB or LTC23NBA

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Accessories For MCCB/MCP/MCS

Connection Hardware: Multi-wire Terminal Lug Kits



- Multi-wire terminal lug kits include: three terminal lugs and one terminal shield.
- Al/Cu rated
- UL File Number E355392

Accessory Description	Frame Size	Configuration	Specifications	Catalog Number
Multi-wire Terminal Lug Kits	M1 (150A)	3-Hole	167 °F (75 °C) #12 AWG*~#3 AWG* Al wire or #14 AWG*~#3 AWG* Cu wire	LK21NCA
		6-Hole	167 °F (75 °C) #12 AWG*~#6 AWG* Al wire or #14 AWG*~#6 AWG* Cu wire	LK21NFA
	M2 (250A)	3-Hole	167 °F (75 °C) #8 AWG*~#2/0 AWG* Al/Cu wire	LK22NCA
		3-Hole (one large, two small)	167 °F (75 °C) #3 AWG*~#2/0 AWG*, (1) Al/Cu wire and # 12 AWG*~#1 AWG*, (2) Al/Cu wire	LK22NGA
		6-Hole	167 °F (75 °C) #12 AWG*~#6 AWG Al/Cu wire	LK22NFA
	M3 (400A)	2-Hole	167 °F (75 °C) #3AWG*~250 kcmil Al/Cu wire	LK23NBA
		3-Hole	167 °F (75 °C) #3AWG*~250 kcmil Al/Cu wire	LK23NCA
		5-Hole (two large, three small)	167 °F (75 °C) #12 AWG*~#1 AWG*, (3) Al/Cu wire and #3 AWG*~#3/0 AWG*, (2) Al/Cu wire	LK23NEA
		6-Hole	167 °F (75 °C) 12 AWG*~#3 AWG* Al/Cu wire	LK23NFA
	M4 (600A)	3- Hole	167 °F (75 °C) #2/0 AWG*~250 kcmil Al/Cu wire	LK24NCA
		5-Hole	167 °F (75 °C) #12 AWG*~#1 AWG*, (3) Al/Cu wire and #3 AWG*~#3/0 AWG*, (2) Al/Cu wire	LK24NEA

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.


Accessories For MCCB/MCP/MCS

Lugs to Bus Bar Conversion Kits


Frame Size	Bus Pad Dimensions (mm)										Bolt Size	Bolt Torque	Conversion Kit Catalog Number
	Line Side (Top)					Load Side (Bottom)							
	W	D	D1	C	H	W	D	D1	C	H			
M1	14.2	14.8	7.3	-	18.5	14.2	16.8	7.3	-	17.5	M6 x 16	10Nm/89 lb in	CKLB21
M2	25	18.5	8.5	-	23	25	18.1	8.5	-	21	M8 x 20	11Nm/97.4 lb in	CKLB22
M3	30	30	13.5	-	27.8	26	27	13.5	-	25.9	M10 x 30	25Nm/222lb-in	Not Required
M4	50	33.3	16.5	-	33.5	50	33	17	-	33.5	M12 x 30	30Nm/265lb-in	Not Required
M5	50	33.4	16.5	-	33.5	50	33	17	-	33.5	M12 x 30	30Nm/265lb-in	Not Required
M6	50	30	12	25	32.6	50	27.5	11.7	25	32.6	M10 x 40(2)	25Nm/222lb-in	Not Required

C

M1-M5 Breaker Bus Pad Dimensions

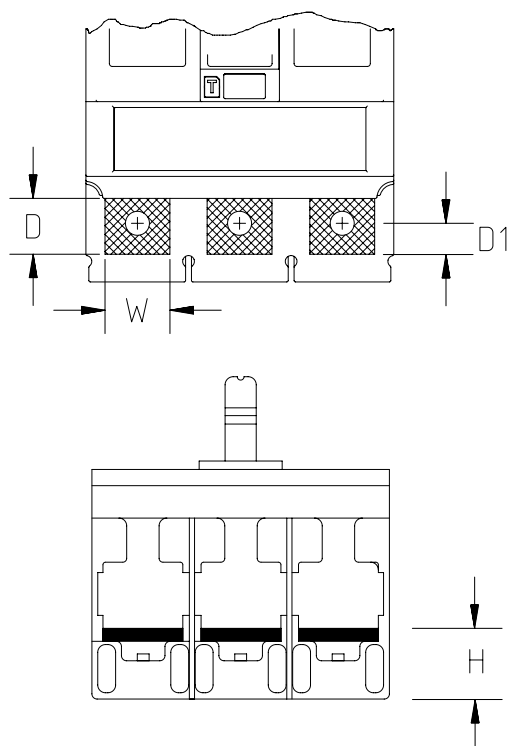

M6 Breaker Bus Pad Dimensions

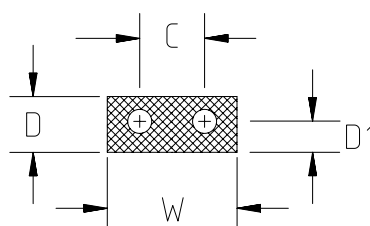

CKLB Conversion Kit



Miniature Circuit Breakers

Understanding UL 489 & UL 1077 Devices

The key to understanding UL 1077 supplementary protection and UL 489 branch protection requirements is to first understand how to identify the products, the applications they can be used for and importance of selecting the correct device in compliance with UL standards and NEC Codes.

- A UL 489 device can be used as branch circuit protection or supplementary protection.
- UL 1077 devices are only acceptable for providing supplementary protection where there is branch circuit protection ahead of it.

UL 489 Circuit Breakers and Branch Circuit Overcurrent Devices

National Electrical Code (NEC) defines a branch circuit as the circuit conductors between the final overcurrent device protecting the circuit and the outlets. UL 489 opens automatically on overload and short circuit. It also protects wire and cable against overload and short circuit. UL 489 circuit breaker used for branch circuit protection.

UL 489 Applications:

- Receptacles and branch lighting
- Control Panels
- Load circuits leaving the equipment (external)
- Uninterruptible power supply (UPS)
- Relays
- Heating, ventilation, air conditioning and refrigeration equipment (HVAC/R)
- Variable frequency drives (VFD)

Features:

- DIN rail mountable
- Stand alone Branch Circuit Protection
- External handle mechanisms available
- Field mounted accessories
- Various levels of protection (curves)



UL 489 products have larger dimensions to provide the necessary phase to phase voltage air gap.

UL 1077 Supplementary Protectors & Overcurrent Devices

UL 1077 Supplementary Protector is a manually re-settable device designed to open the circuit automatically on a predetermined value of time versus current or voltage within an appliance or other electrical equipment. A supplementary protective device is intended to provide limited overcurrent protection for specific applications and utilization equipment such as cabinet lighting and appliances.

Example: only use UL 1077 to protect circuits inside the equipment that do not feed circuits that exit the equipment.

UL 1077 Applications:

- Cabinet Lighting
- Appliances
- Control Power Transformers
- Relays
- Control Circuits

Features:

- DIN rail mountable
- Field mounted accessories
- Various levels of protection (curves)




Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

Miniature Circuit Breakers


Applying UL 489 Breakers Based on Common System Voltages

Voltage 120/240V 1 Phase



Connection		Style	Rating
Poles	Voltage		
One	120V	B1N or B1NQ	120/240V
Two	240V	B1N or B1NQ	120/240V


Voltage 208/120 3 Phase



Connection		Style	Rating
Poles	Voltage		
One	120V	B1N	120/240V
Two	208V	B1N	120/240V
Three	208V	B1N	240V

D


Voltage 240V Delta Ungrounded



Connection		Style	Rating
Poles	Voltage		
Two	240V	B1N	240V
Three	240V	B1N	240V

Note: For high-leg delta or 480V delta systems, please call your NOARK representative.

Voltage 3 Phase 480/277V



Connection		Style	Rating
Poles	Voltage		
One	277V	B1H	480/277V
Two	480V	B1H	480/277V
Three	480/277V	B1H	480/277V

Note: One can always use a higher rated breaker. (ie. B1NQ<B1N<B1H)

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

Miniature Circuit Breakers

Curves


Miniature circuit breakers have different protection curves to accommodate different applications.

C Curve

In Type C curve applications, the magnetic trip is set between 5-10 times the full load current. This is the most common protection used for cables, lighting, resistive loads, general purpose applications and when properly sized, for motors.



C Curve (5-10 I_n)




D Curve

Type D curve applications have a higher setting of 7-15 times the full load current due to the inrush current of motor loads and the magnetizing current on the primary of a transformer or solenoid. Application for this curve include motor loads, transformer primary and solenoids due to the inrush or magnetizing currents.




D Curve (10-20 I_n)

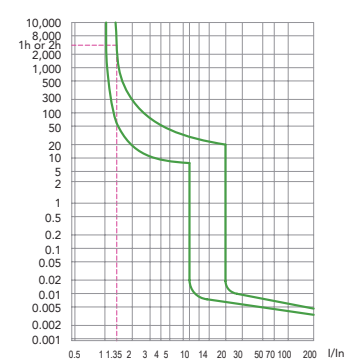


B Curve

Type B curves provide a magnetic trip setting of 3-5 times the full load current. Applications: electronic circuits.

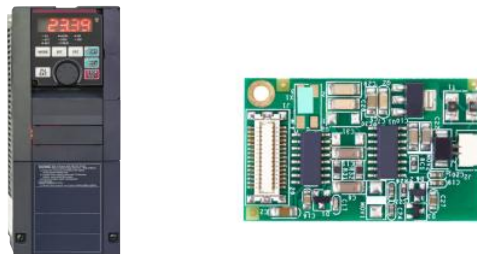

B Curve (3-5 I_n)

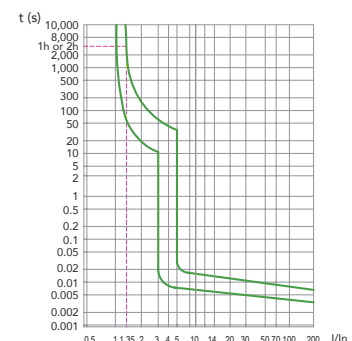

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Miniature Circuit Breakers

UL 489 Product Overview

Features

The B1 UL 489 miniature circuit breakers are available in a complete range of amperages from 0.5A to 63A. Standard ratings of 10 kA at 480Y/277 Vac and 10 kA at 125 Vdc. These are suitable for branch circuit protection.

- Breakers mount on standard 35 mm DIN rail
- Can be used in UL 1077 or CSA C22.2 No.235 applications
- Field installable shunt trip and auxiliary switch
- Available with provisions for ring tongue terminals
- Module width of only 0.71 in (18 mm) per pole
- Contact position indicator (red/green)
- Provision for pad locking the toggle in ON or OFF position



Typical Applications

- Branch Circuit Protection
- Receptacle and lighting circuits
- Motor control circuits
- Load circuits leaving the equipment (external)
- Heating, ventilation, air conditioning, refrigeration equipment
- Power supplies
- Control instrumentation
- Relays
- Uninterruptible power supply (UPS)
- Power conditioners

Certifications

UL 489 File Number E355392 / IEC 60947-2

- UL489 listed, File No. E355392
- CSA Standards C22.2 No. 5, File No. E355392
- IEC 60947-2 standard for industrial applications of circuit protection
- CCC China Compulsory Certification



Miniature Circuit Breakers

B1N UL 489 240 Vac; 60/125 Vdc 10 kA - Box Lugs



Rated Amperage (A)	B Curve (3-5 In) Electronic		C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive	
	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc	1-Pole - 240 Vac / 60 Vdc	2-Pole - 240 Vac / 125 Vdc
	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
0.5	B1N1B0.5	B1N2B0.5	B1N1C0.5	B1N2C0.5	B1N1D0.5	B1N2D0.5
1	B1N1B1	B1N2B1	B1N1C1	B1N2C1	B1N1D1	B1N2D1
1.6	B1N1B1.6	B1N2B1.6	B1N1C1.6	B1N2C1.6	B1N1D1.6	B1N2D1.6
2	B1N1B2	B1N2B2	B1N1C2	B1N2C2	B1N1D2	B1N2D2
3	B1N1B3	B1N2B3	B1N1C3	B1N2C3	B1N1D3	B1N2D3
4	B1N1B4	B1N2B4	B1N1C4	B1N2C4	B1N1D4	B1N2D4
5	B1N1B5	B1N2B5	B1N1C5	B1N2C5	B1N1D5	B1N2D5
6	B1N1B6	B1N2B6	B1N1C6	B1N2C6	B1N1D6	B1N2D6
7	B1N1B7	B1N2B7	B1N1C7	B1N2C7	B1N1D7	B1N2D7
8	B1N1B8	B1N2B8	B1N1C8	B1N2C8	B1N1D8	B1N2D8
10	B1N1B10	B1N2B10	B1N1C10	B1N2C10	B1N1D10	B1N2D10
13	B1N1B13	B1N2B13	B1N1C13	B1N2C13	B1N1D13	B1N2D13
15	B1N1B15	B1N2B15	B1N1C15	B1N2C15	B1N1D15	B1N2D15
16	B1N1B16	B1N2B16	B1N1C16	B1N2C16	B1N1D16	B1N2D16
20	B1N1B20	B1N2B20	B1N1C20	B1N2C20	B1N1D20	B1N2D20
25	B1N1B25	B1N2B25	B1N1C25	B1N2C25	B1N1D25	B1N2D25
30	B1N1B30	B1N2B30	B1N1C30	B1N2C30	B1N1D30	B1N2D30
32	B1N1B32	B1N2B32	B1N1C32	B1N2C32	B1N1D32	B1N2D32
35	B1N1B35	B1N2B35	B1N1C35	B1N2C35	B1N1D35	B1N2D35
40	B1N1B40	B1N2B40	B1N1C40	B1N2C40	B1N1D40	B1N2D40
50	B1N1B50	B1N2B50	B1N1C50	B1N2C50	B1N1D50	B1N2D50
60	B1N1B60	B1N2B60	B1N1C60	B1N2C60	B1N1D60	B1N2D60
63	B1N1B63	B1N2B63	B1N1C63	B1N2C63	B1N1D63	B1N2D63

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1N UL 489 240 Vac; 10 kA - Box Lugs

Certifications

IEC/EN 60947-2



Rated Amperage (A)	B Curve (3-5 In) Electronic	C Curve (5-10 In) Standard	D Curve (10-20 In) Inductive
	3-Pole - 240 Vac	3-Pole - 240 Vac	3-Pole - 240 Vac
	Catalog Number	Catalog Number	Catalog Number
0.5	B1N3B0.5	B1N3C0.5	B1N3D0.5
1	B1N3B1	B1N3C1	B1N3D1
1.6	B1N3B1.6	B1N3C1.6	B1N3D1.6
2	B1N3B2	B1N3C2	B1N3D2
3	B1N3B3	B1N3C3	B1N3D3
4	B1N3B4	B1N3C4	B1N3D4
5	B1N3B5	B1N3C5	B1N3D5
6	B1N3B6	B1N3C6	B1N3D6
7	B1N3B7	B1N3C7	B1N3D7
8	B1N3B8	B1N3C8	B1N3D8
10	B1N3B10	B1N3C10	B1N3D10
13	B1N3B13	B1N3C13	B1N3D13
15	B1N3B15	B1N3C15	B1N3D15
16	B1N3B16	B1N3C16	B1N3D16
20	B1N3B20	B1N3C20	B1N3D20
25	B1N3B25	B1N3C25	B1N3D25
30	B1N3B30	B1N3C30	B1N3D30
32	B1N3B32	B1N3C32	B1N3D32
35	B1N3B35	B1N3C35	B1N3D35
40	B1N3B40	B1N3C40	B1N3D40
50	B1N3B50	B1N3C50	B1N3D50
60	B1N3B60	B1N3C60	B1N3D60
63	B1N3B63	B1N3C63	B1N3D63

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1H UL 489 480Y/277 Vac 10 kA - Box Lugs



Rated Amperage (A)	B Curve (3-5 In) Electronic		C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive	
	1-Pole 277 Vac	2-Pole 480Y/277 Vac	1-Pole 277 Vac	2-Pole 480Y/277 Vac	1-Pole 277 Vac	2-Pole 480Y/277 Vac
	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
0.5	B1H1B0.5	B1H2B0.5	B1H1C0.5	B1H2C0.5	B1H1D0.5	B1H2D0.5
1	B1H1B1	B1H2B1	B1H1C1	B1H2C1	B1H1D1	B1H2D1
1.6	B1H1B1.6	B1H2B1.6	B1H1C1.6	B1H2C1.6	B1H1D1.6	B1H2D1.6
2	B1H1B2	B1H2B2	B1H1C2	B1H2C2	B1H1D2	B1H2D2
3	B1H1B3	B1H2B3	B1H1C3	B1H2C3	B1H1D3	B1H2D3
4	B1H1B4	B1H2B4	B1H1C4	B1H2C4	B1H1D4	B1H2D4
5	B1H1B5	B1H2B5	B1H1C5	B1H2C5	B1H1D5	B1H2D5
6	B1H1B6	B1H2B6	B1H1C6	B1H2C6	B1H1D6	B1H2D6
7	B1H1B7	B1H2B7	B1H1C7	B1H2C7	B1H1D7	B1H2D7
8	B1H1B8	B1H2B8	B1H1C8	B1H2C8	B1H1D8	B1H2D8
10	B1H1B10	B1H2B10	B1H1C10	B1H2C10	B1H1D10	B1H2D10
13	B1H1B13	B1H2B13	B1H1C13	B1H2C13	B1H1D13	B1H2D13
15	B1H1B15	B1H2B15	B1H1C15	B1H2C15	B1H1D15	B1H2D15
16	B1H1B16	B1H2B16	B1H1C16	B1H2C16	B1H1D16	B1H2D16
20	B1H1B20	B1H2B20	B1H1C20	B1H2C20	B1H1D20	B1H2D20
25	B1H1B25	B1H2B25	B1H1C25	B1H2C25	B1H1D25	B1H2D25
30	B1H1B30	B1H2B30	B1H1C30	B1H2C30	B1H1D30	B1H2D30
32	B1H1B32	B1H2B32	B1H1C32	B1H2C32	B1H1D32	B1H2D32

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1H UL 489 480Y/277 Vac 10 kA - Box Lugs

Certifications

IEC/EN 60947-2



Rated Amperage (A)	B Curve (3-5 In) Electronic	C Curve (5-10 In) Standard	D Curve (10-20 In) Inductive
	3-Pole 480Y/277 Vac	3-Pole 480Y/277 Vac	3-Pole 480Y/277 Vac
	Catalog Number	Catalog Number	Catalog Number
0.5	B1H3B0.5	B1H3C0.5	B1H3D0.5
1	B1H3B1	B1H3C1	B1H3D1
1.6	B1H3B1.6	B1H3C1.6	B1H3D1.6
2	B1H3B2	B1H3C2	B1H3D2
3	B1H3B3	B1H3C3	B1H3D3
4	B1H3B4	B1H3C4	B1H3D4
5	B1H3B5	B1H3C5	B1H3D5
6	B1H3B6	B1H3C6	B1H3D6
7	B1H3B7	B1H3C7	B1H3D7
8	B1H3B8	B1H3C8	B1H3D8
10	B1H3B10	B1H3C10	B1H3D10
13	B1H3B13	B1H3C13	B1H3D13
15	B1H3B15	B1H3C15	B1H3D15
16	B1H3B16	B1H3C16	B1H3D16
20	B1H3B20	B1H3C20	B1H3D20
25	B1H3B25	B1H3C25	B1H3D25
30	B1H3B30	B1H3C30	B1H3D30
32	B1H3B32	B1H3C32	B1H3D32

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

B1NQ UL 489 120/240 Vac 10 kA - Quick Connect Terminal



Rated Amperage (A)	B Curve (3-5 In) Electronic		C Curve (5-10 In) Standard		D Curve (10-20 In) Inductive	
	1-Pole - 120 / 240 Vac	2 Pole - 120 / 240 Vac	1-Pole - 120 / 240 Vac	2 Pole - 120 / 240 Vac	1-Pole - 120 / 240 Vac	2 Pole - 120 / 240 Vac
	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number	Catalog Number
10	B1NQ1B10T	B1NQ2B10T	B1NQ1C10T	B1NQ2C10T	B1NQ1D10T	B1NQ2D10T
15	B1NQ1B15T	B1NQ2B15T	B1NQ1C15T	B1NQ2C15T	B1NQ1D15T	B1NQ2D15T
20	B1NQ1B20T	B1NQ2B20T	B1NQ1C20T	B1NQ2C20T	B1NQ1D20T	B1NQ2D20T
25	B1NQ1B25T	B1NQ2B25T	B1NQ1C25T	B1NQ2C25T	B1NQ1D25T	B1NQ2D25T
30	B1NQ1B30T	B1NQ2B30T	B1NQ1C30T	B1NQ2C30T	B1NQ1D30T	B1NQ2D30T
32	B1NQ1B32T	B1NQ2B32T	B1NQ1C32T	B1NQ2C32T	B1NQ1D32T	B1NQ2D32T
35	B1NQ1B35T	B1NQ2B35T	B1NQ1C35T	B1NQ2C35T	B1NQ1D35T	B1NQ2D35T
40	B1NQ1B40T	B1NQ2B40T	B1NQ1C40T	B1NQ2C40T	B1NQ1D40T	B1NQ2D40T
45	B1NQ1B45T	B1NQ2B45T	B1NQ1C45T	B1NQ2C45T	B1NQ1D45T	B1NQ2D45T
50	B1NQ1B50T	B1NQ2B50T	B1NQ1C50T	B1NQ2C50T	B1NQ1D50T	B1NQ2D50T
60	B1NQ1B60T	B1NQ2B60T	B1NQ1C60T	B1NQ2C60T	B1NQ1D60T	B1NQ2D60T
63	B1NQ1B63T	B1NQ2B63T	B1NQ1C63T	B1NQ2C63T	B1NQ1D63T	B1NQ2D63T



Accessory Description	Catalog Number
Flush Mount Clip (B1NQ only) - 1-Pole*	FMC31N

* Note: This accessory is not compatible with comb bus bar applications. They cannot be used on miniature circuit breakers when utilizing a comb bus bar.

Miniature Circuit Breakers

UL 489 Technical Data

		B1N			B1H			B1NQ	
Conformed Standard		UL 489							
Number of Poles		1	2	3	1	2	3	1	2
Rated Operational Voltage (V)		240 Vac 60 Vdc	240 Vac 125 Vdc	240 Vac	480Y/277 Vac			120/240 Vac	
Rated Frequency (Hz)		50/60							
Rated Current (A)		0.5-63			0.5-32				1-63
Instantaneous Tripping Type		B (3-5 In), C (5-10 In), D (10-20 In)							
Interrupting (kA)	120 Vac	10	-		10	-		10	
	240 Vac	10		10					
	277 Vac	-				-	-		
	480Y/277 Vac			-					
	60 Vdc	10	10	-					
	125 Vdc	-		-					
Inverse Time-Delay Over-Current Release Type		Thermal-Magnetic							
Service Life	Electrical	10,000						6,000	
	Mechanical	20,000						10,000	
Protection Degree		IP20							
Wire AWG	Single Wire	18-4							
	Two Wires	#18-6 / #14-10							
Operating Temperature Range		-22 °F to 167 °F (-30 °C to +75 °C)							
Insulation Coordination	Rated Insulation Voltage (Vac)	500							
	Rated Impulse Withstand Voltage (kV)	6							
Pollution Degree		Class III							
Over Voltage Category		Class III							
Mounting		35 mm DIN rail / Flush and surface mount available on B1NQ with the use of additional mounting clips							
Altitude ft (m)		<6,561 (2,000)							
Atmospheric Conditions		At 68 °F (+20), the relative humidity does not exceed 90% At 104 °F (+40), the relative humidity does not exceed 50%							

* AWG = American Wire Gauge

Miniature Circuit Breakers

UL 489 Accessories



Accessory Description	Auxiliary Contact	Catalog Number
Alarm Switch*	1NO+1NC	AL3111N
Auxiliary Contact*	1NO+1NC	AX3111N

		Alarm Switch	Auxiliary Contact
		AL	AX
Ratings (50/60 Hz)	Vac	480/277V (3A) 240V (6A)	
	Vdc	250V (0.5A) 125V (1A) 24V (6A)	



Accessory Description	Voltage Ratings	Auxiliary Contact	Catalog Number
Shunt Trip*	12-24 Vac/dc	-	SHT31NC
	48-60 Vac/dc	-	SHT31NB
	110-415 Vac/110-130 Vdc	-	SHT31NA
	12-24 Vac/dc	1NO+1NC	SHT3111NC
	48-60 Vac/dc	1NO+1NC	SHT3111NB
	110-415 Vac/110-130 Vdc	1NO+1NC	SHT3111NA
Under-Voltage Trip*	240 Vac	1NC	UVT3101NA
	48 Vac/dc	1NC	UVT3101NB
	120 Vac	1NC	UVT3101NC
	240 Vac	1NO	UVT3110NA
	48 Vac/dc	1NO	UVT3110NB
	120 Vac	1NO	UVT3110NC
	240 Vac	-	UVT31NA
	48 Vac/dc	-	UVT31NB
	120 Vac	-	UVT31NC



Accessory Description	Catalog Number
Padlock* (Lock Off)	LK31N



Accessory Description	Catalog Number
Surface Mount Clip - 1-Pole*	SMC311N
Surface Mount Clip - 2 Pole*	SMC312N




Accessory Description	Catalog Number
35 mm DIN rail	TH35A75

* Note: These accessories are not compatible with comb bus bar.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Miniature Circuit Breakers

UL 489 Accessories: Comb Bus Bar Specifications

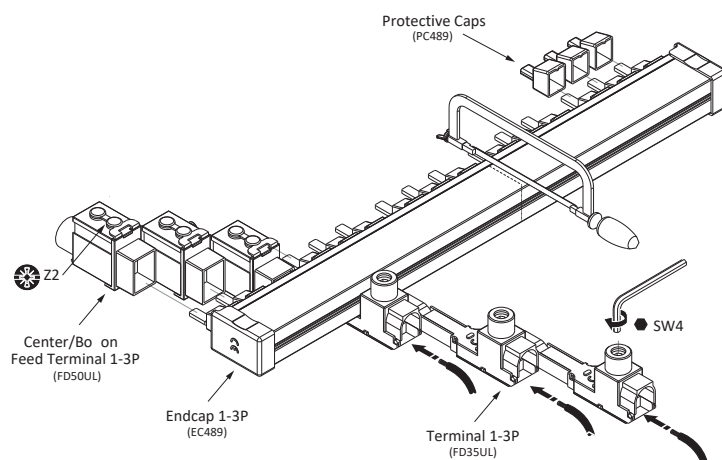

UL 489	Phase	No. of Pins	No. of Circuit Breakers	Poles	Cross Section	Rating	Catalog Number
	1	6	6x	1	25mm	100A (End Feed) 200A (Center Feed)	CBA1P06P25UL
	1	12	12x	1			CBA1P12P25UL
	1	18	18x	1			CBA1P18P25UL
	1	57	57x	1			CBA1P57P25UL
	2	6	3x	2			CBA2P06P25UL
	2	12	6x	2			CBA2P12P25UL
	2	18	9x	2			CBA2P18P25UL
	2	56	28x	2			CBA2P56P25UL
	3	6	2x	3			CBA3P06P25UL
	3	12	4x	3			CBA3P12P25UL
	3	18	6x	3			CBA3P18P25UL
	3	57	19x	3			CBA3P57P25UL

Note: J Fuse Rating 14 kA

UL 489	Phase	No. of Pins	No. of Circuit Breakers	Poles	Cross Section	Rating	Catalog Number
	1	6	6x	6x	25mm ²	100A (End Feed) 115A (Center Feed)	CBA1P06P25
	1	12	12x	12x			CBA1P12P25
	1	18	18x	18x			CBA1P18P25
	1	57	57x	57x			CBA1P57P25
	2	6	3x	3x			CBA2P06P25
	2	12	6x	6x			CBA2P12P25
	2	18	9x	9x			CBA2P18P25
	2	56	28x	28x			CBA2P56P25
	3	6	2x	2x			CBA3P06P25
	3	12	4x	4x			CBA3P12P25
	3	18	6x	6x			CBA3P18P25
	3	57	19x	19x			CBA3P57P25

* Note: 10kA Fuse Class J, 115 A

Description	Catalog Number
Top Feed Terminal (35mm) *	FD35UL
Bottom Feed Terminal (50mm) *	FD50UL
End Cap 1-3p *	EC489
Protective Cap *	PC489

* Sold in multiples of 10.
Example: FD35UL order quantities of 10, 20, 30, 40 etc.

Description	Catalog Number
Top Feed Terminal (35mm ²)	FDA35
Bottom Feed Terminal (50mm ²)	FDA50
End Cap 1-3P	ECA25
Protective Cap	FCA25

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

UL 1077 Product Overview

Features

The B1E UL 1077 miniature circuit breaker has a complete range of amperages from 1A to 125A. Standard ratings of 5 kA at 480Y/277 Vac and 10 kA at 240 Vac. These are suitable for supplementary protection.

- Breakers mount on standard 35 mm DIN rail
- Thermal-magnetic overcurrent protection – three levels of protection, categorized by B, C and D curves
- Fulfills UL 1077, IEC 60947-2 standard
- Field-installable shunt trip and auxiliary switch up to 63A
- Module width of only 0.71 in (18 mm) per pole
- Contact position indicator (red/green)
- 5-Year limited warranty



Typical Application

- Supplementary protection control circuits
- Cabinet lighting
- Business equipment
- Appliances

Certifications

UL 1077 No. E355391 / IEC 60947-2

- Supplementary Protectors are UL Recognized for use in the United States in accordance with NFPA® 70 (NEC).
- UL1077 Recognized Component, File No. E355391
- CSA Standards C22.2 No. 235, File No. E355391
- These devices are for international and domestic use, and also comply with IEC 60947-2 and are CE marked.



Supplementary Protectors

B1E 1-63 Amperes UL 1077 480Y/277 Vac

Certifications

IEC/EN 60947-2



Rated Amperage (A)	B Curve (3-5 In) (Electronic)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1B1	B1E2B1	B1E3B1
1.6	B1E1B1.6	B1E2B1.6	B1E3B1.6
2	B1E1B2	B1E2B2	B1E3B2
3	B1E1B3	B1E2B3	B1E3B3
4	B1E1B4	B1E2B4	B1E3B4
5	B1E1B5	B1E2B5	B1E3B5
6	B1E1B6	B1E2B6	B1E3B6
8	B1E1B8	B1E2B8	B1E3B8
10	B1E1B10	B1E2B10	B1E3B10
13	B1E1B13	B1E2B13	B1E3B13
15	B1E1B15	B1E2B15	B1E3B15
16	B1E1B16	B1E2B16	B1E3B16
20	B1E1B20	B1E2B20	B1E3B20
25	B1E1B25	B1E2B25	B1E3B25
30	B1E1B30	B1E2B30	B1E3B30
32	B1E1B32	B1E2B32	B1E3B32
35	B1E1B35	B1E2B35	B1E3B35
40	B1E1B40	B1E2B40	B1E3B40
50	B1E1B50	B1E2B50	B1E3B50
60	B1E1B60	B1E2B60	B1E3B60
63	B1E1B63	B1E2B63	B1E3B63

Rated Amperage (A)	C Curve (5-10 In) (General)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1C1	B1E2C1	B1E3C1
1.6	B1E1C1.6	B1E2C1.6	B1E3C1.6
2	B1E1C2	B1E2C2	B1E3C2
3	B1E1C3	B1E2C3	B1E3C3
4	B1E1C4	B1E2C4	B1E3C4
5	B1E1C5	B1E2C5	B1E3C5
6	B1E1C6	B1E2C6	B1E3C6
8	B1E1C8	B1E2C8	B1E3C8
10	B1E1C10	B1E2C10	B1E3C10
13	B1E1C13	B1E2C13	B1E3C13
15	B1E1C15	B1E2C15	B1E3C15
16	B1E1C16	B1E2C16	B1E3C16
20	B1E1C20	B1E2C20	B1E3C20
25	B1E1C25	B1E2C25	B1E3C25
30	B1E1C30	B1E2C30	B1E3C30
32	B1E1C32	B1E2C32	B1E3C32
35	B1E1C35	B1E2C35	B1E3C35
40	B1E1C40	B1E2C40	B1E3C40
50	B1E1C50	B1E2C50	B1E3C50
60	B1E1C60	B1E2C60	B1E3C60
63	B1E1C63	B1E2C63	B1E3C63

D

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

B1E 1-125 Amperes UL 1077 480Y/277 Vac

Certifications

IEC/EN 60947-2

CE  US



Rated Amperage (A)	D Curve (10-20 In) (Inductive)		
	1-Pole - 277 Vac	2-Pole - 480 Vac	3-Pole - 480 Vac
	Catalog Number	Catalog Number	Catalog Number
1	B1E1D1	B1E2D1	B1E3D1
1.6	B1E1D1.6	B1E2D1.6	B1E3D1.6
2	B1E1D2	B1E2D2	B1E3D2
3	B1E1D3	B1E2D3	B1E3D3
4	B1E1D4	B1E2D4	B1E3D4
5	B1E1D5	B1E2D5	B1E3D5
6	B1E1D6	B1E2D6	B1E3D6
8	B1E1D8	B1E2D8	B1E3D8
10	B1E1D10	B1E2D10	B1E3D10
13	B1E1D13	B1E2D13	B1E3D13
15	B1E1D15	B1E2D15	B1E3D15
16	B1E1D16	B1E2D16	B1E3D16
20	B1E1D20	B1E2D20	B1E3D20
25	B1E1D25	B1E2D25	B1E3D25
30	B1E1D30	B1E2D30	B1E3D30
32	B1E1D32	B1E2D32	B1E3D32
35	B1E1D35	B1E2D35	B1E3D35
40	B1E1D40	B1E2D40	B1E3D40
50	B1E1D50	B1E2D50	B1E3D50
60	B1E1D60	B1E2D60	B1E3D60
63	B1E1D63	B1E2D63	B1E3D63



Rated Amperage (A)	1-Pole	2-Pole	3-Pole
	Catalog Number	Catalog Number	Catalog Number
80	B1E1P80	B1E2P80	B1E3P80
100	B1E1P100	B1E2P100	B1E3P100
125	B1E1P125	B1E2P125	B1E3P125

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

UL 1077 B1E Technical Data

		B1E 1-63A			B1E 80-125A				
Conformed Standard		UL 1077							
Rated Operational Voltage (V)		480Y/277 Vac; 60/125 Vdc			480Y/277 Vac, 110/220 Vdc				
Rated Frequency (Hz)		50/60							
Rated Current (A)		1-63			80-125				
Number of Poles		1	2	3	1	2	3		
Instantaneous Tripping Type		B (3-5 In), C (5-10 In), D (10-20 In)			(8-12 In)				
Interrupting (kA)	120 Vac	10	-		5	-			
	120/240 Vac	-							
	208 Vac	-							
	240 Vac	10							
	277 Vac	5	-		-	5			
	480/277 Vac	-	5						
	60 Vdc	10	-						
	110 Vdc			10				10	
	125 Vdc	-	10	-				-	
220 Vdc	-				10	-			
Inverse Time-Delay Over-Current Release Type		Thermal-Magnetic							
Service Life	Electrical	6,000			1,500 (80-100A) 1,000 (125A)				
	Mechanical	20,000			8,000 (80-100A) 7,000 (125A)				
Protection Degree		IP20							
Wire AWG*		#18-4			#4-1/0				
Operating Temperature Range		-22 °F to 167 °F (-30 °C to +75 °C)							
Insulation Coordination	Rated Insulation Voltage (Vac)	500							
	Rated Impulse Withstand Voltage (kV)	6			8				
Pollution Degree		Class III							
Over Voltage Category / Mounting		Class III / 35 mm DIN rail							
Altitude ft (m)		<6,561 (2,000)							
Atmospheric Conditions		At 68 °F (+20), the relative humidity does not exceed 90% At 104 °F (+40), the relative humidity does not exceed 50%							

* AWG = American Wire Gauge


Supplementary Protectors

UL 1077 Accessories: Alarm Switch, Auxiliary Contact



Accessory Description	Catalog Number	
	1-63A	80-125A
Alarm Switch*	AL3111U	AL3111L
Auxiliary Contact*	AX3111U	AX3111L

		Alarm Contact	Auxiliary Contact
		AL	AX
Ratings (50/60 Hz)	Vac	480 (3A)	
		277 (3A)	
		240 (6A)	
	Vdc	250 (0.5A)	
		125 (1A)	
		48 (2A)	
		24 (6A)	




Accessory Description	Rated Voltage	Auxiliary Contact	Catalog Number	
			1-63A	80-125A
Shunt Trip*	12-24 Vac/dc		SHT31UC	
	48-60 Vac/dc		SHT31UB	
	110-415 Vac/110-130 Vdc		SHT31UA	
	12-24 Vac/dc	1NO+1NC	SHT3111UC	
	48-60 Vac/dc	1NO+1NC	SHT3111UB	
	110-415 Vac/110-130 Vdc	1NO+1NC	SHT3111UA	
	240-415 Vac	1NO+1NC		SHT3111LA
	24-48 Vac/dc	1NO+1NC		SHT3111LB
Under-Voltage Trip*	240 Vac	1NC	UVT3101UA	
	48 Vac/dc	1NC	UVT3101UB	
	120 Vac	1NC	UVT3101UC	
	240 Vac	1NO	UVT3110UA	
	48 Vac/dc	1NO	UVT3110UB	
	120 Vac	1NO	UVT3110UC	
	240 Vac	-	UVT31UA	
	48 Vac/dc	-	UVT31UB	
	120 Vac	-	UVT31UC	
	240 Vac	-		UVT31L

* Note: These accessories are not compatible with comb bus bar.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Supplementary Protectors

UL 1077 Accessories: Comb Bus Bar

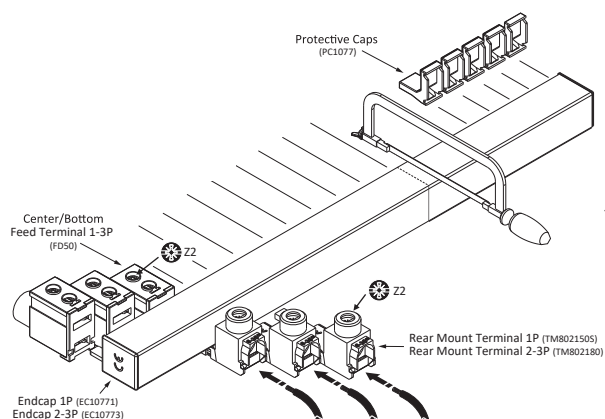

Description	Poles	Cross Section	Catalog Number
Top Feed Terminal*	1	35 mm	TM802150S
	2/3	35 mm	TM802180
Bottom Feed Terminal*	-	50 mm	FD50
End Cap*	1	-	EC10771
	2/3	-	EC10773
Protective Cap*	-	-	PC1077

* Sold in multiples of 10.

Example: PC1077 order quantities of 10, 20, 30, 40 etc.

	Phase	No. of Pins	No. of Circuit Breakers	Poles	Cross Section	Rating	Catalog Number
UL 1077	1	6	6	1	25 mm	100 amp (End Feed) 200 amp (Center Feed)	CBB1P06P25
	1	12	12	1			CBB1P12P25
	1	18	18	1			CBB1P18P25
	1	57	57	1			CBB1P57P25
	2	6	3	2			CBB2P06P25
	2	12	6	2			CBB2P12P25
	2	18	9	2			CBB2P18P25
	2	56	28	2			CBB2P56P25
	3	6	2	3			CBB3P06P25
	3	12	4	3			CBB3P12P25
	3	18	6	3			CBB3P18P25
	3	57	19	3			CBB3P57P25

Comb Bus Bar Specifications			UL 1077	
			1-Pole	2 & 3-Pole
Voltage Ratings	Maximum AC Voltage (Vac)		600	
	Maximum DC Voltage (Vdc)		1,000	600
Current Ratings	Maximum Current 25 mm ² Cross Sections (A)	End Feed	100	
		Center Feed	200	
Protection Class			IP20	
J Fuse Rating (kA)			10	

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

F30 Series Fuse Holder

Product Overview

Features

F30 series Fuse holder can be used in variety of scenarios: F30M and F30CC series can be used in the conventional electrical field, while F30P series is dedicated to the photovoltaic industry. F30 series is matched with a variety of fuses and has a high interrupting capacity.

- Rated current up to 30A
- The interrupting capacity of F30M series and F30CC series is up to 200kA while F30P is 50kA.
- Available option for blown-fuse indicating light, which is convenient for quick inspection and identification.



Certifications:


- F30M:
 - UL 4248-1 Listed, File no. E530645
 - CSA Standard C22.2 No. 4248, File no. E530645
- F30CC:
 - UL 4248-4 Listed File no. E530645
 - CSA Standard C22.2 No. 4248, File no. E530645
- F30P:
 - UL4248-19 Listed. File no. E522691
 - CSA Standard C22.2 No.4248, File no. E522691



Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

F30 Series Fuse Holder

Product Selection Guide

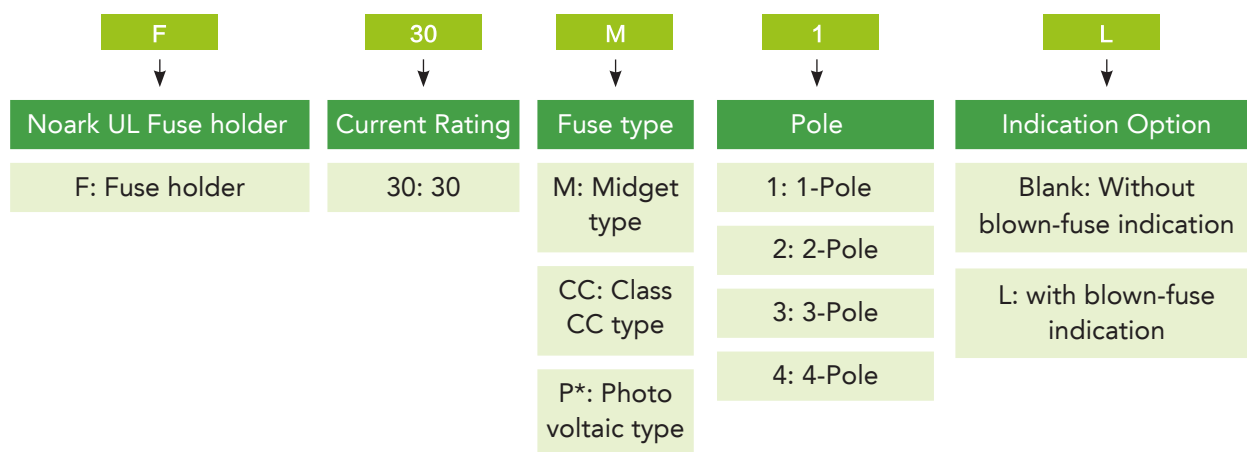

*P type available only in 1P & 2P.

Part Number	Catalog number	Description
1002561	F30M1L	1-Pole Fuse holder for UL Midget with indication light
1002562	F30M2L	2-Pole Fuse holder for UL Midget with indication light
1002563	F30M3L	3-Pole Fuse holder for UL Midget with indication light
1002564	F30M4L	4-Pole Fuse holder for UL Midget with indication light
1002565	F30CC1L	1-Pole Fuse holder for UL Class CC with indication light
1002566	F30CC2L	2-Pole Fuse holder for UL Class CC with indication light
1002567	F30CC3L	3-Pole Fuse holder for UL Class CC with indication light
1002568	F30CC4L	4-Pole Fuse holder for UL Class CC with indication light
1002569	F30P1L	1-Pole Fuse holder for 1000vdc UL PV with indication light
1002570	F30P2L	2-Pole Fuse holder for 1000vdc UL PV with indication light
1002598	F30M1	1-Pole Fuse holder for UL Midget without indication light
1002599	F30M2	2-Pole Fuse holder for UL Midget without indication light
1002600	F30M3	3-Pole Fuse holder for UL Midget without indication light
1002601	F30M4	4-Pole Fuse holder for UL Midget without indication light
1002602	F30CC1	1-Pole Fuse holder for UL Class CC without indication light
1002603	F30CC2	2-Pole Fuse holder for UL Class CC without indication light
1002604	F30CC3	3-Pole Fuse holder for UL Class CC without indication light
1002605	F30CC4	4-Pole Fuse holder for UL Class CC without indication light
1002606	F30P1	1-Pole Fuse holder for 1000vdc UL PV without indication light
1002607	F30P2	2-Pole Fuse holder for 1000vdc UL PV without indication light

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

F30 Series Fuse Holder

F30 Specifications

Fuse holder	F30M	F30CC	F30P
Conformed Standard	UL4248-1	UL4248-4	UL4248-19
Rated Operational Voltage	600 Vac/dc	600 Vac/dc	1000 Vdc
Rated Current In (A)	Max 30A		
SCCR Rating	200 kA	200 kA	50 kA
Number of Poles	1, 2, 3, 4		1, 2
Maximum Power Loss (W)	3.2W (per pole)		
Type	With & Without Indication Light		
Protection Degree	IP20		
Mounting	35 mm DIN-Rail		
Operation Temperature (°C)	-30 °C to 85°C		
Altitude ft (m)	Does not exceed 6,561 (2,000)		
Humidity Resistance	At 68 °F (+20°C), the relative humidity does not exceed 95%		
	At 104 °F (+40°C), the relative humidity does not exceed 50%		
Wet and Heat resistance	Class II		
Pollution Degree	Class III		
Connection	Copper conductor, 18-6 AWG (0.75-10mm ²)		
	Compatible with UL508 Comb busbar		
	Terminal screws, 18 lb-in (2N·m)		
Applicative Fuses	10x38mm Midget fuses (≤30 A)	10x38mm Class CC fuses (≤30 A)	10x38mm PV fuses (≤30 A)
Remarks	75/90°C (167/194°F) Wire CU ONLY		

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Manual Motor Starters

Ex9S Product Overview

Features

Ex9S Manual Motor Starters provide manual isolation, manual motor control, and overcurrent protection. They are electro-mechanical devices combining the functions below in one unit.

- Disconnect for Motor Branch Circuit
- Manual Motor Control (automatic when used with contactor)
- Branch-Circuit Short Circuit Protection (Magnetic Protection)
- Overload Protection (Thermal Protection) - Trip Class 10

The National Electrical Code requires an individual Motor Branch Circuit to be protected by a UL/CSA Listed Fuse, Circuit breaker or Self-Protected Combination Motor Controller.

Available as:

- Up to 80A @ 600 Vac
- UL 60947-4-1 Type E Self Protection - Ex9S32 and Ex9S80
- UL 60947-4-1 Type F Group Motor Protection - Ex9S32
- Built-in fault indication
- Full range of accessories
- Lockable handle



F

Certifications

- UL listed
- CCC Certified
- NOM Certified
- RoHs Compliant



Standards Compliance

- UL 60947-1; UL 60947-4-1
- IEC/EN 60947-1, IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60947 -5-1
- GB 14048.1, GB 14048.2, GB 14048.4
- CSA 22.2 No. 60947-1, CSA 22.2 No. 60947-4-1

Manual Motor Starters

Ex9S Product Selection



Ex9S32

Rated Current Amp (Min-Max)	Thermal Magnetic protection	
	Catalog Number	Part Number
0.10~0.16	Ex9S32A0.16A	1600046
0.16~0.25	Ex9S32A0.25A	1600047
0.25~0.40	Ex9S32A0.4A	1600048
0.40~0.63	Ex9S32A0.63A	1600049
0.63~1	Ex9S32A1A	1600050
1~1.6	Ex9S32A1.6A	1600051
1.6~2.5	Ex9S32A2.5A	1600052
2.5~4	Ex9S32A4A	1600053
Rated Current Amp (Min-Max)	Thermal Magnetic protection	
	Catalog Number	Part Number
4~6.3	Ex9S32A6.3A	1600054
6~10	Ex9S32A10A	1600055
9~14	Ex9S32A14A	1600056
13~18	Ex9S32A18A	1600057
17~23	Ex9S32A23A	1600058
20~25	Ex9S32A25A	1600059
24~32	Ex9S32A32A	1600060



Ex9S80

Certifications
IEC/EN 60947-4-1

CE

Rated Current Amp (Min-Max)	Thermal Magnetic protection	
	Catalog Number	Part Number
14~20	Ex9S80A20A	1600170
18~25	Ex9S80A25A	1600171
23~32	Ex9S80A32A	1600172
30~40	Ex9S80A40A	1600173
38~50	Ex9S80A50A	1600174
48~63	Ex9S80A63A	1600175
60~72	Ex9S80A72A	1600176
70~80	Ex9S80A80A	1600177
Rated Current Amp (Min-Max)	Magnetic protection	
	Catalog Number	Part Number
14~20	Ex9S80A20AM	1600185
18~25	Ex9S80A25AM	1600186
23~32	Ex9S80A32AM	1600187
30~40	Ex9S80A40AM	1600188
38~50	Ex9S80A50AM	1600189
48~63	Ex9S80A63AM	1600190
60~72	Ex9S80A72AM	1600191
70~80	Ex9S80A80AM	1600192
Rated Current Amp (Min-Max)	Thermal Magnetic protection	
	Catalog Number	Part Number
14~20	Ex9S80A20B	1600178
18~25	Ex9S80A25B	1600179
23~32	Ex9S80A32B	1600180
30~40	Ex9S80A40B	1600181
38~50	Ex9S80A50B	1600182
48~63	Ex9S80A63B	1600183
60~72	Ex9S80A72B	1600184
Rated Current Amp (Min-Max)	Magnetic protection	
	Catalog Number	Part Number
14~20	Ex9S80A20BM	1600193
18~25	Ex9S80A25BM	1600194
23~32	Ex9S80A32BM	1600195
30~40	Ex9S80A40BM	1600196
38~50	Ex9S80A50BM	1600197
48~63	Ex9S80A63BM	1600198
60~72	Ex9S80A72BM	1600199

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Manual Motor Starters

Ex9S Technical Data

"Manual Self- Protected Starter"	Overload Trip Range(A)	UL Motor Power (hp) @50/60 Hertz							Short Circuit Rating (SCCR) kA						UL 60947-4-1 Type F Components			
		1 Phase		3 Phase					Stand Alone		UL 508 Type E		UL 508 Type F		UL 60947-4-1 Type E Components	Contactor	DIN rail Base Plate	Manual Motor Starter Connector
		110/120V	220/240V	200V	208V	220/240V	460/480V	575/600V	240V or 480/277V	600/347V	240V or 480/277V	600/347V	240V or 480/277V	600/347V	Fault Contact & Terminal Cover			
Ex9S32A0.16A	0.1-0.16	-	-	-	-	-	-	-	65	5	65	10	65	10	CCE51 and AL5111	Ex9CS09 or Ex9C12	DRA51	CC51 (Mini Contactor) or CC52 (Standard Contactor)
Ex9S32A0.25A	0.16-0.25	-	-	-	-	-	-	-										
Ex9S32A0.4A	0.25-0.4	-	-	-	-	-	-	-										
Ex9S32A0.63A	0.4-.63	-	-	-	-	-	-	-										
Ex9S32A1A	0.63-1	-	-	-	-	-	-	0.5										
Ex9S32A1.6A	1-1.6	-	0.1	-	-	-	0.75	0.75										
Ex9S32A2.5A	1.6-2.5	-	0.167	0.50	0.5	0.5	1	1.5										
Ex9S32A4A	2.5-4	0.125	0.333	0.75	0.75	0.75	2	3										
Ex9S32A6.3A	4-6.3	0.25	0.5	1	1	1.5	3	5										
Ex9S32A10A	6-10	0.5	1.5	2	2	3	5	7.5										
Ex9S32A14A	9-14	0.75	2	3	3	3	10	10	42	42	-	42	-	AL5111	-	-	CC53	
Ex9S32A18A	13-18	1	3	5	5	5	10	15*										
Ex9S32A23A	17-23	1.5	3	5	-	7.5	15	20*										
Ex9S32A25A	20-25	2	-	-	-	7.5	15	20*										
Ex9S32A32A	24-32	2	5	7.5	7.5	10	20	25*										
Ex9S80A20A/B(M)	14- 20A	1	3	5	5	5	10	15	42	5	42	30	-	-	AL5111	-	-	-
Ex9S80A25A/B(M)	18- 25A	2	-	-	7.5	7.5	15	20										
Ex9S80A32A/B(M)	23- 32A	2	5	7.5	7.5	10	20	25										
Ex9S80A40A/B(M)	30- 40A	3	-	10	10	-	25	30										
Ex9S80A50A/B(M)	38- 50A	-	-	15	15	15	30	40										
Ex9S80A63A/B(M)	48- 63A	5	10	15	20	20	40	50										
Ex9S80A72A/B(M)	60- 72A	-	-	20	-	25	50	60										
Ex9S80A80A(M)	70- 80A	-	-	25	25	-	60	75	10	10	10							

* Manual Motor Control and Motor Disconnect only, not applied in Combination Motor Control.

Ex9S32

Manual self-protected starter	Setting Current (A)		Magnetic Trip Rating (A) A
	Minimum	Maximum	
Ex9S32A0.16A	0.1	0.16	2.1
Ex9S32A0.25A	0.16	0.25	3.2
Ex9S32A0.4A	0.25	4	4.8
Ex9S32A0.63A	0.4	0.63	7.2
Ex9S32A1A	0.63	1	11
Ex9S32A1.6A	1	1.6	20
Ex9S32A2.5A	1.6	2.5	30
Ex9S32A4A	2.5	4	50
Ex9S32A6.3A	4	6.3	72.5
Ex9S32A10A	6	10	130
Ex9S32A14A	9	14	175
Ex9S32A18A	13	18	230
Ex9S32A23A	17	23	280
Ex9S32A25A	20	25	322
Ex9S32A32A	24	32	416

Ex9S80

Manual self-protected starter	Setting Current (A)		Magnetic Trip Rating (A)	
	Minimum	Maximum	A	B
Ex9S80A20A/B(M)	14	20	310	400
Ex9S80A25A/B(M)	18	25	375	500
Ex9S80A32A/B(M)	23	32	445	680
Ex9S80A40A/B(M)	30	40	560	800
Ex9S80A50A/B(M)	38	50	700	960
Ex9S80A63A/B(M)	48	63	950	1150
Ex9S80A72A/B(M)	60	72	1000	1150
Ex9S80A80A(M)	70	80	1150	-

Manual Motor Starters

Ex9S and Accessories: Technical Data

Description		Ex9S32	Ex9S80
Rated operational current I _e (A)		32A	80A
Conventional rated thermal current I _{th} (A)		0.16~32A	14-80A
Tripping Class		10	
Rated insulation voltage U _i (Vac)		690/IEC; 600/UL, CSA	
Rated operational voltage U _e (AC)		230/240, 400/415, 460/480, 575/600	
Rated impulse withstand voltage U _{imp} (AC)		6,000V	
Rated Operational Frequency (Hz)		50/60Hz	
Resistance to shock		30 gn -11 ms	
Resistance to vibrations		5gn (5 -150Hz)	
Environmental Temperature	Transportation or Storage	-40°F to 176°F (-40°C to 80°C) ¹	
	Working at	-4°F to 140°F (-20°C to 60°C) ²	
	Testing at	59°F to 77°F (15°C to 25°C)	
	Instantaneous limit	-31°F to 158°F (-35°C to 70°C)	
Altitude ft (m)		Not to exceed 6,562 (2,000)	
Ambient Conditions		At mounting site, relative humidity not exceed 90% at the temperature 104°F (40°C), higher relative humidity is allowable under lower temperature	
Pollution Grade		III	
Mounting Conditions		The inclination between the mounting plane and the vertical plane shall not exceed 30°; The product shall be installed and operated at a place without obvious shock, impact and vibration.	
Service life* (cycles)	Electrical	50,000	50,000 (up to 63A); 30,000(72A&80A)
	Mechanical	100,000	50,000 (up to 72A); 30,000(80A)
Duty Class (cycles/hr)		30, max. operating rate	
Degree of Protection		IP20	

1: 24 hours max. at the ultimated temperature

2: with temperature reduction factor

*: close/open operation, and 30 cycles/hr for AC-3 Duty @ 400/415 Vac

	Auxiliary contacts AX51	Auxiliary contacts AX52	Auxiliary contacts AX53	Auxiliary contacts AX51
Rated operational voltage U _e	300V	600V	60 Vac, 24 Vdc	600V
Rated frequency	50/60Hz	50/60Hz	-	50/60Hz
Rated impulse withstand voltage U _{imp}	2500V	6000V	800V	6000V
Conventional rated thermal current (I _{th})"	2.5A	5A	1A	5A
Mechanical life (C-O operations)	100000	100000	100000	100000
Electrical Rating	C300, Q300	B600, Q300	AC-12: 60V/0.1A DC-12: 24V/1A	B600, Q300
Minimum connection Load	5 mA @ 24 Vac/dc	8 mA @ 24 Vac/dc	2mA @ 12 Vac/dc or 3mA @ 5 Vdc	8mA @ 24 Vac/dc

Terminal Wiring

Model		Wire Ranges(AWG)	Torques lb-in (N.m)	Screw Type	Pull wire length inch (mm)
Phil-Hex head	Ex9S80	14~3	53 (6)	M8	0.59 (15)
	Ex9S32	(1)x14-(2)x8	22 (2.5)	M4	0.4 (10)
Phil-Slot Head	AX51	(1)x18-(2)x12	7 (0.8)	M3	-
	AX52	(1)x18-(2)x12	7 (0.8)	M3	-
	AX53	(1)x18-(2)x14	7 (0.8)	M3	-
	AL51	(1)x18-(2)x12	7 (0.8)	M3	-
	UVT51	(1)x18-(2)x12	15 (1.7)	M3.5	-
	SHT51	(1)x18-(2)x12	15 (1.7)	M3.5	-


Manual Motor Starters

UL 60947-4-1 (formerly UL 508) Type E Application

The National Electrical Code (NEC) requires the following when controlling a motor:

- A means of disconnecting power from the circuit
- Short circuit protection for the cables
- A way to start and stop the motor (typically a contactor)
- Overload protection for the motor (typically an overload relay)

The EX9S32 can provide (self protected) UL 60947-4-1 (formerly UL 508) Type E protection when used in conjunction with a terminal extension and an alarm contact. The Ex9S80 also provide Type E protection when used with an Alarm contact (does not require the use of terminal extension).

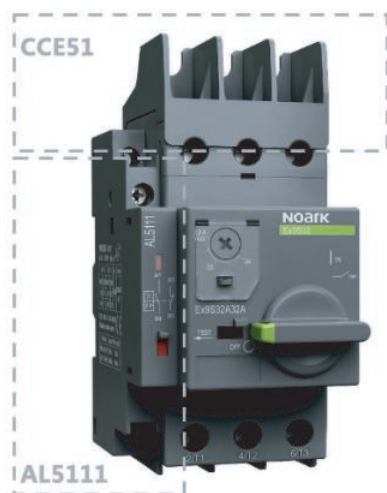

Type E:

9S32 + CCE51 + AL5111

OR

9S80 + AL5111

TYPE E

Components	Catalog Number	Product
Manual Motor Starter: 0.10-32 Amps 14-80 Amps	EX9S32 Ex9S80	
Fault Signaling/Alarm Contact	AL5111	
Terminal cover/extension: Ex9S32 only	CCE51	

F

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.


*NEC-National Electrical Code

** CEC-Canadian Electrical Code

Manual Motor Starters

UL 60947-4-1 (formerly UL 508) Type F Application

The EX9S32* can provide (group motor) UL 60947-4-1 (formerly UL 508) Type F protection when used in conjunction with a contactor, terminal extension and an alarm contact.

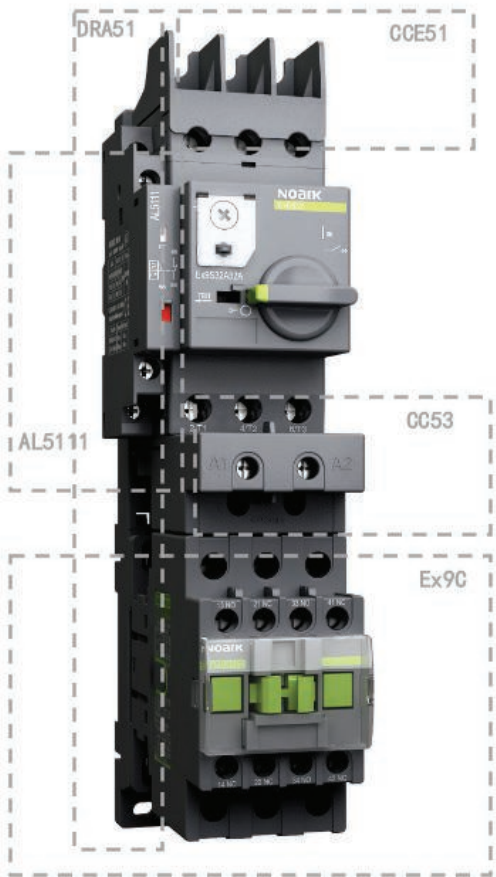

Type F:

9S + CCE51 + AL5111 + 9C + CC53 + DRA51

TYPE F		
Components	Catalog Number	Product
Manual Motor Starter 0.10-32 Amps	EX9S32*	
Terminal cover/extension for Ex9S32	CCE51	
Contactor	EX9C or EX9CS	
Fault Signaling/Alarm Contact	AL5111	
Mounting Bracket for mounting a Ex9S32 to a Ex9C Standard Type Contactor, 9-38A	DRA51	
Connection Block between Ex9S32 and Ex9CS Mini Type Contactor 9-12A	CC51	
	or	
Connection Block between Ex9S32 and Ex9C Standard Type Contactor 9-18A	CC52	
	or	
Connection Block between Ex9S32 and Ex9C Standard Type Contactor 25-38A	CC53	

*Type F protection is not available in Ex9S80

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code
** CEC-Canadian Electrical Code

Manual Motor Starters

Ex9S Accessories

Auxiliary Contact Blocks

Applies to Ex9S32 and Ex9S80

Description	Mounting Location	Max. No. of Blocks	Contact Type	Catalog Number
Instantaneous auxiliary contacts	Front	1	NO+NC	AX5111
			NO+NO	AX5120
			NO+NC	AX5311
	Left Side	2	NO+NC	AX5211
			NO+NO	AX5220
Fault Signaling Contact	Left Side	1	NC+NC	AX5202
			NO+NC	AL5111



Electrical Trip Unit

Applies to Ex9S32 and Ex9S80


Description	Mounting Location	Voltage	Hz	Catalog Number
Undervoltage Release	Right Side	110-120V	60	UVT51A
		127V	60	UVT51B
		110-120V	50	UVT51B
		208V	60	UVT51C
		240V	60	UVT51D
		480V	60	UVT51E
		600V	60	UVT51F
		220-240V	50	UVT51G
		380-415V	50	UVT51H
		100-130V	50/60	SHT51A
Shunt Release	Right Side	190-330V	50/60	SHT51B
		330-440V	50/60	SHT51C
		480-500V	50/60	SHT51D
		575-600V	50/60	SHT51E



Busbars

Applies to Ex9S32

Description	No. of Ex9S32 Starter	No. of Side-Mounted Aux Contact on each Ex9S32 starter	Busbar Pitch (mm)	Catalog Number
Sets of 3-pole, 63A Busbar	2	None	45	BBUM 245
		1 of AX52, AL51	54	BBUM 254
	4	None	45	BBUM 445
		1 of AX52, AL51	54	BBUM 454
	5	None	45	BBUM 545
		1 of AX52, AL51	54	BBUM 554



Manual Motor Starters

Ex9S Accessories

Wiring Accessories

Applies to Ex9S32

Description	Application	Catalog Number
Input Terminal for BBUM Busbar	Terminal block for power supply to one or more BBUM bus bar	FD51
Protective end cover	For unused busbar outlets	PC51
Terminal Cover	Terminal cover for Ex9S32 for use in type E application	CCE51



CCE51

Enclosures

Applies to Ex9S32

Description	Type	Color	Rating	Catalog Number
Waterproof Enclosure; Ex9S32 Protectors	Operation by rotary handle	Black/ Gray	NEMA 4X/4, IP 65	WPB51B
		Yellow/ Red		WPB51Y



WPB51B



WPB51Y

Operation Handle

Applies to Ex9S32 and Ex9S80

Description	Type	Color	Rating	Catalog Number
Extended Rotary Handle	9 inch (230mm) shaft, with bracket	Black/ Gray	NEMA 4X/4, IP65	ERH51B
		Yellow/ Red		ERH51Y



ERH51B

Mounting Accessories

Applies to Ex9S32

Description	Application	Catalog Number
Combination Block	Between Ex9S32 and Ex9C Mini Type Contactor, 09-12A	CC51
	Between Ex9S32 and Ex9C Standard Type Contactor, 09-18A	CC52
	Between Ex9S32 and Ex9C Standard Type Contactor, 25-38A	CC53
Mounting Bracket	For mounting a Ex9S32 to a Ex9C Standard Type Contactor, 09-38A	DRA51



CC51



CC52



CC53



DRA51



Ex9S32 + CC53 +
Ex9C32 + DRA51

IEC Contactors

Ex9C Product Overview

Features

Ex9C series contactors are suitable for a broad range of motor control applications. With many available accessories and options, these contactors have ampacity ratings from 6A to 1000A at 600Vac and can be applied in systems up to 600Vac. A range of overload relays are available in a variety of frame sizes to fit respective contactors of given rated current.

- Nine frame sizes with rated current up to 1000A at 690V AC-3
- Coil control voltage from 24-600 Vac and 24-500 Vdc
- Wide range electronic coil available for 9-500A contactors
- features built-in surge suppression
- DIN rail 35 mm and panel mountable



Certifications

- UL 508 Listed, File No. E353866, UL 60947-1 and 60947-4-1
- CSA C22.2 No. 14, File no. E353866
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified



IEC Contactors

Ex9CS/CSR 6 -12 Amperes Miniature

- Built-in auxiliary contacts on 3-pole; additional auxiliary contacts are front mounted
- Non-Reversing



Certifications	
IEC/EN 60947-1, 60947-4-1	
UL 60947-1, 60947-4-1	
 	
	

Rated Amperage (A)		120 Vac Coil		24 Vdc Coil	
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC	Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	6	Ex9CS0610G7	Ex9CS0601G7	Ex9CS06D10B	Ex9CS06D01B
	9	Ex9CS0910G7	Ex9CS0901G7	Ex9CS09D10B	Ex9CS09D01B
	12	Ex9CS1210G7	Ex9CS1201G7	Ex9CS12D10B	Ex9CS12D01B
		Power Poles - 4NO	Power Poles - 2NO+2NC	Power Poles - 4NO	Power Poles - 2NO+2NC
4-Pole	6	Ex9CS06G7C	Ex9CS06G7B	Ex9CS06DBC	Ex9CS06DBB
	9	Ex9CS09G7C	Ex9CS09G7B	Ex9CS09DBC	Ex9CS09DBB
	12	Ex9CS12G7C	Ex9CS12G7B	Ex9CS12DBC	Ex9CS12DBB

- Built-in auxiliary contacts on 3-pole; additional auxiliary contacts are front mounted
- Reversing



Rated Amperage (A)		120 Vac Coil		24 Vdc Coil	
		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC	Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	6	Ex9CSR0610G7	Ex9CSR0601G7	Ex9CSR06D10B	Ex9CSR06D01B
	9	Ex9CSR0910G7	Ex9CSR0901G7	Ex9CSR09D10B	Ex9CSR09D01B
	12	Ex9CSR1210G7	Ex9CSR1201G7	Ex9CSR12D10B	Ex9CSR12D01B
		Power Poles - 4NO	Power Poles - 2NO+2NC	Power Poles - 4NO	Power Poles - 2NO+2NC
4-Pole	6	Ex9CSR06G7C	-	Ex9CSR06DBC	-
	9	Ex9CSR09G7C	-	Ex9CSR09DBC	-
	12	Ex9CSR12G7C	-	Ex9CSR12DBC	-

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9CS/CSR Technical Data

			Ex9CS/CSR		
			6	9	12
General Information					
Pole			3, 4		
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1		
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30		
Rated Frequency (Hz)			50/60		
Conventional Free Air Thermal	0≤104 °F (0≤40 °C)		20		
	0≤140 °F (0≤60 °C)				
	0≤158 °F (0≤70 °C)				
Current Ith (A)			16		
Rated Insulating Voltage Ui (V)			690		
Rated Impulse Withstand Voltage Uimp (kV)			6		
Electrical Life	AC-3	380/400V	1,200,000		
	AC-4		50,000	40,000	
Mechanical Life			10,000,000		
Operating Cycles Per Hour (cycles/h)	AC-3		1,200		
	AC-4		300		
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)		
	Working At		-4 to 140 °F (-20 to +60 °C)		
	Maximum		-40 to 158 °F (-40 to +70 °C)		
Altitude ft (m)			<6,562 (2,000)		
Pollution Degree			Class III		
Rated Operational Current Ie (A)					
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	20		
	AC-3	380/400V	6	9	12
	AC-3	660/690V	3.8	4.9	
	AC-4	380/400V	6	9	12
	AC-4	660/690V	3.8	4.9	
Rated Power of 3-Phase Motor					
For IEC (kW)	AC-3	230 Vac	-		
	AC-4				
	AC-3	380/400 Vac	2.2	4	5.5
	AC-4				
	AC-3	660/690 Vac	3	4	
	AC-4				
	AC-3	1,000 Vac	-		
	AC-4				
UL Rating					
Ith (A)			20		
Single-Phase (HP)	110-120 Vac		0.5		0.75
	220-240 Vac		1	1.5	2
Three-Phase (HP)	200-208 Vac		1.5	3	
	220-240 Vac		2		
	440-480 Vac		3	5	7.5
	550-600 Vac		5	7.5	10
Coil Voltage (V)			24-500 Vac, 12-250 Vdc		

			Ex9CS/CSR		
			6	9	12
Coil Electrical Parameters					
Tolerance of Control Voltage 50/60 Hz	Operation (Uc)	Standard	85% -,110%		
	Drop-Off (Uc)	Standard	20% - 75% (AC) 10% - 75% (DC)		
Coil Power Consumption					
In Rush (VA)		AC	70		
Sealed (VA)		AC	9		
Pick-Up (W)		DC	4		
Hold (W)		DC	4		
Operating Time (ms)	Operation	Standard	10-20		
	Drop-Off	Standard	4-16		
IEC AC Contactor Working at DC Power Data					
	Rated Working Voltage (V)	Poles connected in Series	Rated Working Current (A)		
Working Type: DC-1, Resistive Load	24	1	15		
		2			
		3			
Time Data: L/R≤1ms	48/75	1	4		
		2			
		3			
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	15		
		2			
		3			
	225	1	1		
		2			
		3			
IEC AC Contactor Working at DC Power Data					
	Rated Working Voltage (V)	Poles connected in Series	Rated Working Current (A)		
Working Type: DC-2 to DC-5, Inductive Load	24	1	15		
		2			
		3			
Time Data: L/R≤15ms	48/75	1	5		
		2			
		3			
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	1.5		
		2			
		3			
	225	1	0.5		
		2			
		3			

IEC Contactors

Ex9CS/CSR Technical Data

		Ex9CS/CSR		
		6	9	12
Built-In Auxiliary Contacts				
Auxiliary Contacts		1NO or 1NC (3P), None (4P)		
Rated Operation Voltage U _e (V)		690		
Rated Insulating Voltage U _i (V)		690		
Rated Impulse Withstand Voltage U _{imp} (kV)		6		
Rated Frequency (Hz)		50/60		
Conventional Free Air Thermal Current I _{th} (A)		10		
Rated Operational Current I_e (A)				
AC-15	120 V	6		
	240 V	3		
	380 V	1.9		
	600 V	1.2		
DC-13	125 V	0.55		
	220 V	0.31		
Mounting	Screw (mm)	ø4		
	DIN rail (mm)	35/7.5		
Dimension LxWxH in		1.93 x 2.32 x 2.28		
Weight I _b (kg)		0.40 (0.18)		
Degree of Protection		IP20		
Main Power Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3		
Torque of Terminals in-lb (N.m)		7 (0.80)		
Auxiliary Contact Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable With Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3		
Torque of Terminals in-lb (N.m)		7 (0.80)		

* AWG = American Wire Gauge

IEC Contactors

Ex9CS/R Accessories

The Ex9CS/C line shares accessories and every contactor can be equipped with one front-mounted unit, two units of side-mounted contact (one from the left, the other from the right) and surge suppressor block.



- For contactors Ex9CS and Ex9CSR
- Field installable
- One unit used with a contactor

Accessory Description	Matched Contactor	Catalog Number
Auxiliary Contact Front Mount Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)	Ex9CS06-12 Ex9CSR06-12 (Front Mount)	AX4122UL

Auxiliary Contact Specifications		
UL Standard File Number		E353866
IEC Standard File Number		IEC/EN 60947-5-1
Certifications		UL Listed, CSA, CCC
Electrical Parameters		
Rated Frequency (Hz)		50/60
Rated Working Voltage Ue	AC-15 (V)	380/400/415
	DC-13 (V)	220/250
Rated Working Current Ie	AC-15 (A)	1.9A
	DC-13 (A)	0.31
Rated Capacity	AC-15 (VA)	720
	DC-13 (W)	69
Rated Thermal Current Ith (A)		10
Rated Impulse Withstand Voltage Uimp (kV)		6 (1.2/50 ms)
Rated Insulation Voltage Ui (V)		690
Mechanical Parameters		
Dimensions (L x W x H) in		1.46 x 1.30 x 1.54
Degree of Protection		IP20
Terminals		Lift
Terminal Capacity AWG*		#18-12
Torque of Terminals in-lb (N.m)		7 (0.80)



- Reduces voltage peaks in control circuit
- Versions with varistor and RC circuit technology
- Includes cable lugs for connecting to contactor terminals

Accessory Description	Matched Contactor	Catalog Number
Surge Suppressor Block	Ex9CS06-12	CCU41BUL

Note: external surge protection accessory, CCU42BUL / CCU43BUL is not needed on the F-type contactor with a wide range coil since it is already integral to the coil.

Surge Suppressor Block Specifications	
Electrical Parameters	
Internal Technology	Varistor
Control Coil Voltage U_c (Protection Range)	24-48 Vac/dc 110-240 Vac/dc 380-415 Vac/dc
Maximum Peak Voltage U_p (U_c)	2 kV
Mechanical Parameters	
Matched Contactor Type	Ex9CS06-12
Mounting	Mounts to Contactor Control Coil Terminals
Weight lb (kg)	0.04 (0.02)

Accessory Description	Suitable For	Catalog Number
Star Delta Wiring Kit (SDWK)	Ex9CS or Ex9CSR	SDWK41
Reversing wiring kit (REWK)	Ex9CS or Ex9CSR	REWK41


* AWG = American Wire Gauge



IEC Contactors

Ex9C 9-1000 Amperes Standard

- Built-in auxiliary contacts; 1NO/1NC additional auxiliary contacts are front or side mounted
- Non-Reversing

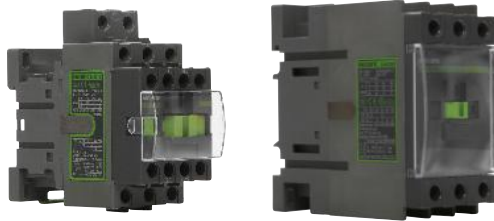

Certifications

IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

Rated Amperage (A)		Wide Range Electronic Coil (with built-in surge suppression)				
		120 Vac Coil	24-60 Vac/dc Coil	48-130 Vac/dc Coil	100-250 Vac/dc Coil	250-500 Vac/dc Coil
		Catalog Number	Catalog Number	Catalog Number	Catalog Number	
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC				
3-Pole	9	Ex9C0911G7	Ex9C09F11J	Ex9C09F11H	Ex9C09F11K	-
	12	Ex9C1211G7	Ex9C12F11J	Ex9C12F11H	Ex9C12F11K	-
	18	Ex9C1811G7	Ex9C18F11J	Ex9C18F11H	Ex9C18F11K	-
	25	Ex9C2511G7	Ex9C25F11J	Ex9C25F11H	Ex9C25F11K	-
	32	Ex9C3211G7	Ex9C32F11J	Ex9C32F11H	Ex9C32F11K	-
	38	Ex9C3811G7	Ex9C38F11J	Ex9C38F11H	Ex9C38F11K	-
	40	Ex9C4011G7	Ex9C40F11J	Ex9C40F11H	Ex9C40F11K	-
	50	Ex9C5011G7	Ex9C50F11J	Ex9C50F11H	Ex9C50F11K	-
	65	Ex9C6511G7	Ex9C65F11J	Ex9C65F11H	Ex9C65F11K	-
	80	Ex9C8011G7	Ex9C80F11J	Ex9C80F11H	Ex9C80F11K	-
	100	Ex9C10011G7	Ex9C100F11J	Ex9C100F11H	Ex9C100F11K	-
	Power Poles - 3NO Auxiliary Contact - 2NO+2NC					
	115	Ex9C115E22G	-	Ex9C115F22H	Ex9C115F22K	Ex9C115F22L
	150	Ex9C150E22G	-	Ex9C150F22H	Ex9C150F22K	Ex9C150F22L
	185	Ex9C185E22G	-	Ex9C185F22H	Ex9C185F22K	Ex9C185F22L
	225	Ex9C225E22G	-	Ex9C225F22H	Ex9C225F22K	Ex9C225F22L
	265	Ex9C265E22G	-	Ex9C265F22H	Ex9C265F22K	Ex9C265F22L
	300	Ex9C300E22G	-	Ex9C300F22H	Ex9C300F22K	Ex9C300F22L
	400	Ex9C400E22G	-	Ex9C400F22H	Ex9C400F22K	Ex9C400F22L
	500	Ex9C500E22G	-	Ex9C500F22H	Ex9C500F22K	Ex9C500F22L
	630	Ex9C630E22GG	-	-	-	-
	800	Ex9C800E22GG	-	-	-	-
	1,000	Ex9C1000E22GG	-	-	-	-

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Reversing Contactors

Ex9CR 9-500 Amperes Standard Reversing

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection on 115A and above.



Rated Amperage (A)		120 Vac Coil	Components to build Reversing Contactor*			
		Catalog Number	Quantity	Contactor	Quantity	Mechanical Interlock
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC				
3-Pole	9	Ex9CR0911G7	2	Ex9C0911G7	1	MIT42UL
	12	Ex9CR1211G7	2	EX9C1211G7	1	MIT42UL
	18	Ex9CR1811G7	2	EX9C1811G7	1	MIT42UL
	25	Ex9CR2511G7	2	EX9C2511G7	1	MIT42UL
	32	Ex9CR3211G7	2	EX9C3211G7	1	MIT42UL
	38	Ex9CR3811G7	2	EX9C3811G7	1	MIT42UL
	40	Ex9CR4011G7	2	EX9C4011G7	1	MIT43UL
	50	Ex9CR5011G7	2	EX9C5011G7	1	MIT43UL
	65	Ex9CR6511G7	2	EX9C6511G7	1	MIT43UL
	80	Ex9CR8011G7	2	EX9C8011G7	1	MIT43UL
	100	Ex9CR10011G7	2	EX9C10011G7	1	MIT43UL

*Power connection not included for 09-100A

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection



Rated Amperage (A)		120 Vac Coil	Components to build Reversing Contactor				
		Catalog Number	Quantity	Contactor	Quantity	Mechanical Interlock	Quantity
		Power Poles - 3NO Auxiliary Contact - 2NO+2NC					Power Connection
3-Pole	115	Ex9CR115E22G	2	Ex9C115E22G	1	MIT44UL	1
	150	Ex9CR150E22G	2	Ex9C150E22G	1	MIT44UL	1
	185	Ex9CR185E22G	2	Ex9C185E22G	1	MIT44UL	1
	225	Ex9CR225E22G	2	Ex9C225E22G	1	MIT45UL	1
	265	Ex9CR265E22G	2	Ex9C265E22G	1	MIT45UL	1
	300	Ex9CR300E22G	2	Ex9C300E22G	1	MIT45UL	1
	400	Ex9CR400E22G	2	Ex9C400E22G	1	MIT46UL	1
	500	Ex9CR500E22G	2	Ex9C500E22G	1	MIT46UL	1

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Reversing Contactors

Ex9CR 115-500 Amperes Standard Reversing

- Built-in auxiliary contacts; additional auxiliary contacts are front or side mounted
- Reversing
- Reversing contactor is comprised of 2 contactor joined by a mechanical interlock and power connection



Green Highlight = Most Popular

Certifications

IEC/EN 60947-1, 60947-4-1
UL 60947-1, 60947-4-1

CE

UL

US

LISTED

CCC

Rated Amperage (A)		Wide Range Electronic Coil (built-in surge suppression)		
		48-130Vac/dc Coil	100-250 Vac/dc Coil	250-500 Vac/dc Coil
		Catalog Number	Catalog Number	Catalog Number
Power Poles - 3NO Auxiliary Contact - 2NO+2NC				
3-Pole	115	Ex9CR115F22H	Ex9CR115F22K	Ex9CR115F22L
	150	Ex9CR150F22H	Ex9CR150F22K	Ex9CR150F22L
	185	Ex9CR185F22H	Ex9CR185F22K	Ex9CR185F22L
	225	Ex9CR225F22H	Ex9CR225F22K	Ex9CR225F22L
	265	Ex9CR265F22H	Ex9CR265F22K	Ex9CR265F22L
	300	Ex9CR300F22H	Ex9CR300F22K	Ex9CR300F22L
	400	Ex9CR400F22H	Ex9CR400F22K	Ex9CR400F22L
	500	Ex9CR500F22H	Ex9CR500F22K	Ex9CR500F22L

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR							
			9	12	18	25	32	38	40	50
General Information										
Pole			3							
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1							
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30							
Rated Frequency (Hz)			50/60							
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		25		32	40	50		60	80
	0≤140 °F (0≤60 °C)									
	0≤158 °F (0≤70 °C)		17		22	28	35		42	56
Rated Insulating Voltage Ui (V)			690						1,000	
Rated Impulse Withstand Voltage Uimp (kV)			6						8	
Electrical Life	AC-3	380/400V	1,200,000							
	AC-4		50,000	40,000		50,000	40,000		35,000	30,000
Mechanical Life			10,000,000							
Operating Cycles Per Hour (cycles/h)	AC-3		1200			1000				
	AC-4		300			150			120	
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)							
	Working At		-4 to 140 °F (-20 to +60 °C)							
	Maximum		-40 to 158 °F (-40 to +70 °C)							
Altitude ft (m)			<6,562 (2,000)							
Pollution Degree			Class III							
Rated Operational Current Ie (A)										
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	25		32	40	50		60	80
	AC-3	380/400V	9	12	18	25	32	38	40	50
	AC-3	660/690V	6.7	9	10.6	17.3	21.9		34	39
	AC-4	380/400V	9	12	18	25	32		40	50
	AC-4	660/690V	6.7		8.9	14	17.3		34	39
Rated Power of 3-Phase Motor										
For IEC (kW)	AC-3	380/400 Vac	4	5.5	7.5	11	15	18.5		22
	AC-4									
	AC-3	660/690 Vac	5.5	7.5	9	15	18.5		30	33
	AC-4		5.5		7.5	11	15			
UL Rating										
Ith (A)			25		32	40	50		60	80
Single-Phase (HP)	110-120 Vac		0.5	1	1.5	2	3			5
	220-240 Vac		1.5	2	3		5		7.5	10
Three-Phase (HP)	200-208 Vac		3		5	7.5	10		10	15
	220-240 Vac								15	
	440-480 Vac		5	7.5	10	15	20		30	40
	550-600 Vac		7.5	10	15	20	25			
Coil Voltage (V)			24-600 Vac, 24-250 Vac/dc							

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR													
			65	80	100	115	150	185	225	265	300	400	500	630	800	1000
General Information																
Pole			3													
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1													
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2, IEC 60068-2-11, IEC 60068-2-30													
Rated Frequency (Hz)			50/60													
Conventional Free Air Thermal Current I _{th} (A)	0≤104 °F (0≤40 °C)		80	125		160	185	215	275	330	400	500	610	800	1000	1000
	0≤140 °F (0≤60 °C)						170	200	260	300	360	430	550	720	850	850
	0≤158 °F (0≤70 °C)		56	80		140	160	180	200	260	290	400	480	630	750	750
Rated Insulating Voltage U _i (V)			1,000											1,000		
Rated Impulse Withstand Voltage U _{imp} (kV)			8											8		
Electrical Life	AC-3	380/400V	1,200,000			1,000,000								800,000	500,000	
	AC-4		30,000	25,000	200,000								200,000			
Mechanical Life			10,000,000			8,000,000						5,000,000		3,000,000		
Operating Cycles Per Hour (cycles/h)	AC-3		1,000	900		750		500				420	300		120	
	AC-4		120			130								100		
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)													
	Working At		-4 to 140 °F (-20 to +60 °C)													
	Maximum		-40 to 158 °F (-40 to +70 °C)													
Altitude ft (m)			<6,562 (2,000)													
Pollution Degree			Class III													
Rated Operational Current I _e (A)																
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	80	125		160	185	215	275	330	400	500	650	800	1000	1260
	AC-3	380/400V	65	80	100	115	150	185	225	265	300	400	500	630	800	1000
	AC-3	660/690V	42	49				170		280	450		560	650	700	
	AC-4	380/400V	65	80	100	54	68	81	96	117	125	150	175	225	242	260
	AC-4	660/690V	42	49		48	57	65	85	105	115	135	150	200	215	230
Rated Power of 3-Phase Motor																
For IEC (kW)	AC-3	230 Vac	-			37	45	55		75	90	132	160	200	250	315
	AC-4					18.5	22	30		37	40	45	55	75		80
	AC-3	380/400 Vac	30	37	45	55	75	90	110	132	160	220	250	335	450	560
	AC-4					30	37	45	55	63	75	90	100	110	132	150
	AC-3	660/690 Vac	37	45	110	132	160	200	250		355	400	560	630	710	
	AC-4				50	55	63	80	100	110	132	150	185	200	220	
	AC-3	1,000 Vac	-			75	90	90		132		250	315	400	450	500
	AC-4					50	55	63		80		110		150	200	
UL Rating																
I _{th} (A)			80	125		160	185	215	275	330	400	500	610	800	900	1000
Single-Phase (HP)		110-120 Vac	5	7.5	10	15	-		-					-		
		220-240 Vac	15	20		25	30	40								
Three-Phase (HP)		200-208 Vac	20	30	30	40	50	60		75	100	125	150	-		
		220-240 Vac	25		40	50	60	75		100	125	150	200	250	300	350
		440-480 Vac	50	60		100	125	150		200	250	300	400	500	600	750
		550-600 Vac				125	150	200		250	300	400	500	600	700	800
Coil Voltage (V)			24-600 Vac			24-600 Vac/dc						36-600 Vac/dc		48 - 480 Vac/dc		

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR								
			9	12	18	25	32	38	40	50	
Coil Electrical Parameters											
Tolerance of Control Voltage 50/60 Hz	Operation (Uc)	Standard	85% - 110%								
		AC/DC Widerange	85% - 110%								
	Drop-Off (Uc)	Standard	20% - 75% (AC), 10 - 75% (DC)								
		AC/DC Widerange	20% - 75% (AC), 10 - 75% (DC)								
Coil Power Consumption											
AC Only Coil		In Rush (VA)	90		100		240				
		Sealed (VA)	9.5		11.4		36.6				
DC Only Coil		Pick-Up (W)	7		17		36.6				
		Hold (W)	7		17		6				
AC/DC (Widerange)		In Rush (VA)	55				200				
		Sealed (VA)	5.1				6				
		Pick-Up (W)	30				150				
		Hold (W)	2				4.5				
Operating Time (ms)	AC Only and DC Only Coil	Operation	12-24		14-27		20-30				
		Drop-Off	6-20		7-22		8-20				
	AC/DC (Widerange)	Operation	45-65				50-100				
		Drop-Off	20-90				20-120				
IEC AC Contactor Working at DC Power Data											
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)								
Working Type: DC-1, Resistive Load	24	1	20	25	32	40	50	65			
		2									
		3									
Time Data: L/R≤1ms	48/75	1	20	25	32	40	50	65			
		2									
		3									
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	4			7					
		2	20	25	32	40	50	65			
		3									
	225	1	1					1.5			
		2	4			7					
		3	20	25	32	40	50	65			
IEC AC Contactor Working at AC Power Data											
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)								
Working Type: DC-2 to DC-5, Inductive Load	24	1	20	25	32	40	50	65			
		2									
		3									
Time Data: L/R≤15ms	48/75	1	8		32	40	50	65			
		2	20	25							
		3									
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	2			3			4		
		2	15			32	40	50	65		
		3	20	25							
	225	1	0.5			1			1.5		
		2	2			3			4		
		3	8			32	40	50	65		

IEC Contactors

Ex9C/CR Technical Data

			Ex9C/CR											Ex9C				
			65	80	100	115	150	185	225	265	300	400	500	630	800	1000		
Coil Electrical Parameters																		
Tolerance of Control Voltage 50/60 Hz		Operation (Uc)	85% - 110%															
		Drop-Off (Uc)	20% - 70%				20% - 60%											
Coil Power Consumption																		
AC Only Coil		In Rush (VA)	240	280		400		590		600		850						
		Sealed (VA)	36			10												
DC Only Coil		Pick-Up (W)	17			400		590		600		850						
		Hold (W)				10												
AC/DC (Wide-range)		In Rush (VA)	200		400		590		600		-							
		Sealed (VA)	6		10								-					
		Pick-Up (W)	150		400		590		600		-							
		Hold (W)	4.5		10								-					
Operating Time (ms)	AC Only and DC Only Coil	Operation	20-30	20-35		31-64		45-100		58-95		100-180						
		Drop-Off	8-20	6-20		44-68		47-67		85-120		100-120						
	AC/DC Wide- range	Operation	50-100			31-64		45-100		58-95		-						
		Drop-Off	20-120			44-68		47-67		85-120		-						
IEC AC Contactor Working at DC Power Data																		
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)															
Working Type: DC-1, Resistive Load	24	1	65	100	160		200	300	400									
		2																
		3																
Time Data: L/R≤1ms	48/75	1	65	100	160		200	300	400									
		2																
		3																
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	65	100	160		200	300	400									
		2																
		3																
	225	1	1.5		3.4		3.8											
		2	7	12	20	30		40										
		3	65	100	160		200	300	400									
IEC AC Contactor Working at AC Power Data																		
	Rated Working Voltage (V)	Poles of Series Connection	Rated Working Current (A)															
Working Type: DC-2 to DC-5, Inductive Load	24	1	65	100	160		200	300	400									
		2																
		3																
Time Data: L/R≤15ms	48/75	1	65	100	160		200	300	400									
		2																
		3																
Environmental Temperature: ≤140 °F (≤60 °C)	125	1	65	100	160		200	300	400									
		2																
		3																
	225	1	1.5	2	2.5													
		2	4	5	7.5	11												
		3	65	100	160		200	300	400									

IEC Contactors

Ex9C/CR Technical Data

		Ex9C/CR							
		9	12	18	25	32	38	40	50
Built-In Auxiliary Contacts									
Auxiliary Contacts		1NO+1NC, 2NO+2NC						1NO+1NC	
Rated Operation Voltage Ue (V)									
Rated Insulating Voltage Ui (V)		690							
Rated Impulse Withstand Voltage Uimp (kV)		6							
Rated Frequency (Hz)		50/60							
Conventional Free Air Thermal Current Ith (A)		10							
Rated Operational Current Ie (A)									
AC-15	120V	6							
	240V	3							
	380V	1.9							
	600V	1.2							
	125V	0.55							
	220V	0.31							
	250V	0.27							
Mounting	Screw (mm)	ø4						ø5	
	DIN rail (mm)	35						35 or 75	
Dimension (L x W x H) in		3.50 x 1.77 x 3.70			3.94 x 1.77 x 4.25			4.80 x 2.99 x 4.84	
Weight lb (kg)		0.77 (0.35)			0.88 (0.40)			2.71 (1.23)	
Degree of Protection		IP 20 (Control Circuit Terminal), IP 00 (Main Circuit Terminal)							
Main Power Terminal Connection									
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-10			#14-8			#14-4	
	Dual Cable								
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Screw Size ø (mm)		M3.5			M4			M8	
Torque of Terminals in-lb (N.m)		15 (1.70)			22 (2.50)			53 (6)	
Auxiliary Contact Terminal Connection									
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12							
	Dual Cable								
Stiff Cable With Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable								
	Dual Cable								
Screw Size ø (mm)		M3.5							
Torque of Terminals in-lb (N.m)		15 (1.70)							

* AWG = American Wire Gauge

IEC Contactors

Ex9C/CR Technical Data

		Ex9C/CR										
		65	80	100	115	150	185	225	265	300	400	500
Built-In Auxiliary Contacts												
Auxiliary Contacts		1NO+1NC			2NO+2NC							
Rated Operation Voltage Ue (V)		690										
Rated Insulating Voltage Ui (V)		6										
Rated Impulse Withstand Voltage Uimp (kV)		50/60										
Rated Frequency (Hz)		10										
Conventional Free Air Thermal Current Ith (A)												
Rated Operational Current Ie (A)												
AC-15	24V	-			6							
	120V	6			-							
	230V	-			3.13							
	240V				3							
	380V	1.9			-							
	400V	-			1.8							
	600V	1.2			-							
	690V	-			1.04							
DC-13	24V	0.55										
	125V	0.55										
	220V	0.31										
	250V	0.27										
Mounting	Screw (mm)	ø5			ø8			ø9				
	DIN rail (mm)	35 or 75			-							
Dimension (L x W x H) in		4.80 x 2.99 x 4.84	5.12 x 3.43 x 5.12		6.81 x 4.72 x 6.85			8.39 x 5.71 x 8.19		8.50 x 6.30 x 9.02		
Weight lb (kg)		2.71 (1.23)	3.31 (1.50)		6.61 (3)			13.23 (6)		20.94 (9.5)		
Degree of Protection		IP 20										
Main Power Terminal Connection												
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#14-4	#12 - 1/0		(1x) #4 - (2x) 250 MCM			(1x) 1/0 - (2x) 500 MCM				
	Dual Cable		#12 - 1									
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable		#12 - 1/0									
	Dual Cable		#12 - 1									
Screw Size ø (mm)		M8						M10				
Torque of Terminals in-lb (N.m)		53 (6)	79 (9)		159 (18)			310 (35)				
Bus Bar Terminal Connection												
Bus Bar Size		-			2x0.75x0.25 (2x20x5)			2x1x0.25 (2x30x5)		2x1.25x0.25 (2x40x5)		
Screw Size ø (mm)					M8			M10				
Torque of Terminals in-lb (N.m)					159 (18)			310 (35)				
Auxiliary Contact Terminal Connection												
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12										
	Dual Cable											
Stiff Cable With Cold-Press Terminal AWG*	Single Cable											
	Dual Cable											
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable											
	Dual Cable											
Screw Size ø (mm)		M3.5										
Torque of Terminals in-lb (N.m)		15 (1.70)										

* AWG = American Wire Gauge

IEC Contactors

Ex9C Technical Data

		Ex9C		
		630	800	1000
Built-In Auxiliary Contacts				
Auxiliary Contacts		2NO+2NC		
Rated Operation Voltage Ue (V)		690		
Rated Insulating Voltage Ui (V)		6		
Rated Impulse Withstand Voltage Uimp (kV)		50/60		
Rated Frequency (Hz)		10		
Conventional Free Air Thermal Current Ith (A)				
Rated Operational Current Ie (A)				
AC-15	24V	6		
	230V	3.13		
	240V	3		
	400V	1.8		
	690V	1.04		
DC-13	24V	0.55		
	125V	0.55		
	220V	0.31		
	250V	0.27		
Mounting	Screw (mm)	11.5		
	DIN rail (mm)	-		
Dimension LxWxH in		11.73 x 9.06 x 10.47	12.68 x 9.06 x 10.47	
Weight lb		44.53	48.5	49.16
Degree of Protection		IP20 (Control Circuit Terminal) IP00 (Main Circuit Terminal)		
Main Power Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	LTC25NB 250-600 LTC25NC 4/0-500	LTC26NC 3/0-750 LTC26ND 3/0-500	
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M12	4*M10	
Torque of Terminals in-lb (N.m)		310(45)	310(35)	
Auxiliary Contact Terminal Connection				
Flexible Cable Without Cold-Press Terminal AWG*	Single Cable	#18-12		
	Dual Cable			
Stiff Cable With Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Stiff Cable Without Cold-Press Terminal AWG*	Single Cable			
	Dual Cable			
Screw Size ø (mm)		M3.5		
Torque of Terminals in-lb (N.m)		15 (1.70)		

* AWG = American Wire Gauge

IEC Contactors

Ex9C Accessories

The Ex9CS/C line shares accessories and every contactor can be equipped with one front-mounted unit, two side-mounted contacts (one left, one right) and surge suppressor block.

Front Mount Auxiliary Contact



- Field installable
- One unit used with a contactor

Side Mount Auxiliary Contact



- Field installable
- One unit used with a contactor on the left side, another unit on the right side

Accessory Description	Matched Contactor	Auxiliary Contact	Catalog Number
Auxiliary Contact	Ex9C09-500 Ex9CR09-500 (Front Mount)	1NO+1NC	AX4211UL
		2NO+2NC	AX4222UL
		3NO+1NC	AX4231UL
Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)	Ex9C09-100 Ex9CR09-100 (Side Mount)	1NO+1NC	AX4311UL

Auxiliary Contact		Front Mount AX42	Side Mount AX43
UL Standard File Number		E353866	
IEC Standard File Number		IEC/EN 60947-5-1	
Certifications		UL Listed, CSA, CCC	
Electrical Parameters			
Rated Frequency (Hz)		50/60	
Rated Working Voltage U_e	AC-15 (V)	380/400/415	
	DC-13 (V)	220/250	
Rated Working Current I_e	AC-15 (A)	1.9A	
	DC-13 (A)	0.31	
Rated Capacity	AC-15 (VA)	720	
	DC-13 (W)	69	
Rated Thermal Current I_{th} (A)		10	
Rated Impulse Withstand Voltage U_{imp} (kV)		6 (1.2/50 ms)	
Rated Insulation Voltage U_i (V)		690	
Mechanical Parameters			
Device Width in		1.89	0.43
Device Height in		1.46	2.72
Device Depth in		1.02 (1NO+1NC)	1.77 (2NO+2NC, 3NO+1NC)
Degree of Protection		IP20	
Terminals		Lift	
Terminal Capacity AWG*		#18-12	
Torque of Terminals in-lb (N.m)		15 (1.70)	

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9C Accessories


Mechanical Interlock



Power Connection



Surge Suppressor Block



- Reduces voltage peaks in control circuit
- Versions with varistor and RC circuit technology
- Includes cable lugs for connecting to contactor terminals

Accessory Description	Matched Contactor	Catalog Number
Mechanical Interlock (for Ex9C)	Ex9C09-38	MIT42UL
	Ex9C40-100	MIT43UL
	Ex9C115-185	MIT44UL
	Ex9C225-300	MIT45UL
	Ex9C400-500	MIT46UL
Power Connection (for Ex9C)	Ex9C115-185	PCL185UL
	Ex9C225-300	PCL300UL
	Ex9C400-500	PCL500UL
Surge Suppressor Block	Ex9C09-38	CCU42BUL
	Ex9C40-100	CCU43BUL

Note: external surge protection accessory, CCU42BUL / CCU43BUL is not needed with wide range coil since it is already integral to the coil.

Specifications	CCU42	CCU43
Electrical Parameters		
Internal Technology	Resistance	
Control Coil Voltage Uc (Protection Range)	110-240 Vac/dc	
Maximum Peak Voltage Up (Uc)	3 kV	
Mechanical Parameters		
Matched Contactor Type	Ex9C09-38	Ex9C40-100
Mounting	Mounts to Contactor Control Coil Terminals	
Weight lb (kg)	0.04 (0.02)	

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9C Accessory Specifications

Green Highlight = Most Popular



Accessory Description	Matched Contactor	Relay Type	Timing Range	Catalog Number
Time Delay Relay (Pneumatic Timer)	Ex9C09-500	Off Delay	0.1 - 3 s	AXCD0UL
			0.1 - 30 s	AXCD2UL
			10 - 180 s	AXCD4UL
		On Delay	0.1 - 3 s	AXCT0UL
			0.1 - 30 s	AXCT2UL
			10 - 180 s	AXCT4UL



Accessory Description	Type	Catalog Number
Terminal Cover	Ex9C115~185	TCV46
	Ex9C225~500	TCV47



Accessory Description	Suitable For	Catalog Number
Star Delta Wiring Kit	Ex9C 115-185	SDWK45



Accessory Description	Use with Relay	Catalog Number
Surface mount	Ex9R38	AD56UL
	Ex9R100	AD53UL
	Ex9R185	AD54UL
	Ex9R500	AD55UL

Mounting Base	AD56UL	AD53UL	AD54UL	AD55UL
Current Rating (A)	38	104	185	500
Voltage (Vac)	600			
Terminal Wire Range AWG*	#18 - #8	#12 - #1	-	
Terminal Torque in-lb (N.m)	22 (2.50)	80 (9)		
Wire Strip Length in	0.51	0.71		
Matched Contactor Type	Ex9C09-38	Ex9C40-100	Ex9C115-185	Ex9C225-500

* AWG = American Wire Gauge

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

IEC Contactors

Ex9CDS Product Overview

Features

Ex9CDS are general purpose contactors used mainly for controlling 3-phase motors and power circuits up to 600 Vac. This entry level line includes magnetic coils and basic accessories for front and side mounting.

- 5 kA @ 600 Vac
- Built-in NO or NC auxiliary contacts on 9-32A frames
- 3 and 4-pole versions including 2NO+2NC and 4NO configurations
- 95 A mounts on standard 35mm DIN rail (40-95A can also mount on 75 mm DIN rail)
- 12 months warranty



Certifications

- UL 508 Listed, File Number E353866, UL 60947-1 and 60947-4-1
- CSA C22.2 No. 14, File no. E353866
- IEC/EN 60947
- CE Compliant



IEC Contactors

Ex9CDS 9-95 A General Purpose

- Auxiliary contacts are side mounted; front mounted also available



Certifications

IEC/EN 60947-4-1



Rated Amperage (A)		120 Vac Coil	
		Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO	Power Poles - 3NO Auxiliary Contact - 1NC
3-Pole	9	Ex9CDS09A30G7A	Ex9CDS09A30G7B
	12	Ex9CDS12A30G7A	Ex9CDS12A30G7B
	18	Ex9CDS18A30G7A	Ex9CDS18A30G7B
	25	Ex9CDS25A30G7A	Ex9CDS25A30G7B
	32	Ex9CDS32A30G7A	Ex9CDS32A30G7B
Rated Amperage (A)		120 Vac Coil	
		Catalog Number	
		Power Poles - 3NO Auxiliary Contact - 1NO/1NC	
3-Pole	40	Ex9CDS40A30G7C	
	50	Ex9CDS50A30G7C	
	65	Ex9CDS65A30G7C	
	80	Ex9CDS80A30G7C	
	95	Ex9CDS95A30G7C	

Rated Amperage (A)		120 Vac Coil	
		Catalog Number	Catalog Number
		Power Poles - 4NO	Power Poles - 2NO Auxiliary Contact - 2NC
4-Pole	9	Ex9CDS09A40G7	Ex9CDS09A22G7
	12	Ex9CDS12A40G7	Ex9CDS12A22G7
	25	Ex9CDS25A40G7	Ex9CDS25A22G7
	40	Ex9CDS40A40G7	Ex9CDS40A22G7
	50	Ex9CDS50A40G7	Ex9CDS50A22G7
	65	Ex9CDS65A40G7	Ex9CDS65A22G7
	80	Ex9CDS80A40G7	Ex9CDS80A22G7
	95	Ex9CDS95A40G7	Ex9CDS95A22G7

IEC Contactors

Ex9CDS Technical Data

Ex9CDS/CDR			09	12	18	25	32	40	50	65	80	95	
Frame			Frame 1			Frame 2		Frame 3			Frame 4		
Poles			3 & 4		3	3 & 4	3	3 & 4					
Rated Insulation Voltage (Vac)			690										
Operating Frequency (Operations/h)	Electrical	AC-3	1,200				600						
		AC-4	300										
	Mechanical	3,600											
Electrical Life Operations		AC-3	1,000,000				800,000		600,000				
		AC-4	200,000					150,000			100,000		
Ambient Temperature			23 to 104°F (-5 to 40°C)										
Mechanical Life Operations			10,000,000				8,000,000				6,000,000		
Matched Overload Relay Type			Ex9RD25				Ex9RD36	Ex9RD93					
Rated Conventional Heating Current (A) AC-1			20		32	40	50	60	80		95		
AC-3	Ie (A)	220/230V	9	12	18	25	32	40	50	65	80	95	
		380/400V	6.6	8.9	12	18	21	34	39	42	49		
		660/690V	2.2	3	4	5.5	7.5	11	15	18.5	22	25	
	Pe (kW)	220/230V	4	5.5	7.5	11	15	18.5	22	30	37	45	
		380/400V	5.5	7.5	10	15	18.5	30	37		45		
		660/690V	3	5	7.5	10	15	20	25	30	30		
Power of Controlled Three-Phase Cage Motor AC-3 (hp)		200V	5	7.5	7.5	10	15		20	25	30		
		240V			10	15	20		25	30			
		460V	5	7.5	10	15	20	25	30	40		50	
		600V											
Terminal Connection		Number of Pieces											
Flexible Cable with Cold-Pressed Socket AWG*		1	#16-14	#16-12			#14-10	#10-4			#8-2		
		2						#12-8			#10-6		
Flexible Cable without Cold-Pressed Socket AWG*		1	#16-12	#16-10	#1.5-10	#14-8	#10-4			#8-2			
		2	#1-2.5	#16-12	#1.5-6	#14-10	#4-10			#10-6			
Inflexible Cable AWG*		1	#16-12	#16-10			#14-8	#6-25			#8-2		
		2						#12-8			#10-6		
Screw Size			M3.5			M4		M8			M10		
Tightening Torque in-lb (N.m)			7 (0.80)			10 (1.20)		45 (3.50)			89 (10)		
Coil Parameters													
Coil Power	In-Rush (VA)		70			110		200					
	Sealed (VA)		8	8	11		20						
	Power (W)		1.8-2.7		3-4			6-10					
Operation Range	Operation Voltage (Us)		85-110%										
	Drop-Out Voltage (Us)		20-75%										
Coil Voltage (50/60 Hz)			120V										

* AWG = American Wire Gauge

IEC Contactors

Ex9CD/CM Accessories: Auxiliary Contact

Green Highlight = Most Popular



- Front Mount**
- For contactors Ex9CD
 - Field installable
 - One unit used with a contactor

Accessory Description		Matched Contactor	Contacts	Catalog Number
Auxiliary Contact	Front Mount	Ex9CDS09-630 Ex9CDR09-630	1NO+1NC	AXA11
Mechanically Linked Contacts (in accordance with IEC 60947-5-1 Annex L) and Mirror Contacts (in accordance with IEC 60947-4-1 Annex F)			2NO+2NC	AXA22

		Auxiliary Contact CDS Front Mount AXA 11 - 1 NO + 1NC / 22 - 2NO+2NC
UL Standard File Number		E353866
IEC Standard File Number		IEC/EN 60947-5-1
Certifications		UL Listed, CSA, CCC
Electrical Parameters		
Rated Frequency (Hz)		50/60
Rated Working Voltage Ue	AC-15 (V)	380/400/415
	DC-13 (V)	220/250
Rated Working Current Ie	AC-15 (A)	0.19
	DC-13 (A)	0.31
Rated Capacity	AC-15 (VA)	720
	DC-13 (W)	69
Rated Thermal Current Ith (A)		10
Rated Impulse Withstand Voltage Uimp (kV)		6 (1.2/50 μs)
Rated Insulation Voltage Ui (V)		690
Mechanical Parameters		
Device Width in		1.89
Device Height in		1.46
Device Depth in		1.02 / 1.77
Degree of Protection		IP 20
Terminal Capacity AWG*		#17-9
Torque of Terminals in-lb (N.m)		8.85 (1)

* AWG = American Wire Gauge

Thermal Overload Relays

Ex9R Product Overview

Features

- For use with Ex9C and Ex9CR*
- Rated current up to 500A @ 600 Vac, 50/60 Hz
- Adjustable current setting for overload protection
- Overload protection trip Class 10 and Class 10A
- Phase loss protection
- Automatic or manual reset selectable
- Status indication
- STOP and TEST function
- Direct mount to contactors or 35 mm DIN rail mounting base option
- 5-Year limited warranty

*see page 80 for overloads for use with miniature contactors.



Certifications

- UL 508 Listed, File Number No. E353865, UL 60947-1 and 60947-4-1
- CSA C22.2 No. 14, File no. E353865
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified




Thermal Overload Relays

Ex9R 38-500 Amperes



Certifications

IEC/EN 60947-4-1



Rated Amperage (Min - Max)	38A
	Use with Contactors: Ex9C9-38
	Catalog Number
0.63-1	Ex9R38B1A
1-1.6	Ex9R38B1.6A
1.6-2.5	Ex9R38B2.5A
2.5-4	Ex9R38B4A
4-6	Ex9R38B6A
5.5-8	Ex9R38B8A
7-10	Ex9R38B10A
9-13	Ex9R38B13A
12-18	Ex9R38B18A
16-24	Ex9R38B24A
23-32	Ex9R38B32A
30-38	Ex9R38B38A

Rated Amperage (Min - Max)	100A
	Use with Contactors: Ex9C40-100
	Catalog Number
23-32	Ex9R100B32A
30-40	Ex9R100B40A
37-50	Ex9R100B50A
48-65	Ex9R100B65A
55-70	Ex9R100B70A
63-80	Ex9R100B80A
80-104	Ex9R100B104A



Rated Amperage (Min - Max)	185A
	Use with Contactors: Ex9C115-185
	Catalog Number
75-115	Ex9R185B115A
110-150	Ex9R185B150A
140-210	Ex9R185B210A

Rated Amperage (Min - Max)	500A
	Use with Contactors: Ex9C225-500
	Catalog Number
160-225	Ex9R500B225A
210-300	Ex9R500B300A
280-400	Ex9R500B400A
380-500	Ex9R500B500A

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Thermal Overload Relays

Ex9R Technical Data

			Ex9R
Tripping Class			Class 10/10A
Operating Frequency (Hz)			50/60
Phase Failure Protection Function			Yes
Automatic and Manual Reset			
Temperature Compensation			
Tripping Indicator			
Test and Stop Pushbutton			
Environmental Conditions	Altitude ft (m)		<6,562 (2,000)
	Pollution Degree		Class III
Rated Tripping Current (In)			1.2
Sensitivity to Phase Failure (In)			30%
Rated Working Voltage (V)			600
Rated Impulse Withstand Voltage Uimp			6 kV
Auxiliary Contacts	Number of Contacts		1NO+1NC
	Rated Operating Voltage Ue (V)	AC-15	220/380
		DC-13	220
	Rated Operating Current Ie (A)	AC-15	1.64 / 0.95
		DC-13	0.13
	Circuit Continuous Current		5 A 600 Vac, 1 A 300 Vdc
	Contact Rating		B600, R300
	Terminal Wire Range AWG*		#18-12
	Terminal Torque in-lb (N.m)		15 (1.70)
	Terminal Wire Strip Length in		0.43

* AWG = American Wire Gauge

Thermal Overload Relays

Ex9R Technical Data

Frame Size	38A											
Current Setting Range (A)	0.63-1	1-1.6	1.6-2.5	2.5-4	4-6	5.5-8	7-10	9-13	12-18	16-24	23-32	30-38
Short Circuit Rating, 3 Phase at 600 Vac (kA)	1		5									
Power Terminal	#18-8 AWG*											
Power Terminal Torque in-lb (N.m)	22 (2.5)											
Matched Contactor Type	Ex9C9-38											
Surface mount adapter for remote mounting	AD56UL											

Frame Size	100A						
Current Setting Range (A)	23-32	30-40	37-50	48-65	55-70	63-80	80-104
Short Circuit Rating, 3 Phase at 600 Vac (kA)	5			10			
Power Terminal	#12-1 AWG*						
Power Terminal Torque in-lb (N.m)	80 (9)						
Matched Contactor Type	Ex9C40-100						
Surface mount adapter for remote mounting	AD53UL						

Frame Size	185A		
Current Setting Range (A)	75-115	110-150	140-210
Short Circuit Rating, 3 Phase at 600 Vac (kA)	10		
Power Terminal	Bus Bar Only		
Power Terminal Torque in-lb (N.m)	159 (18)		
Matched Contactor Type	Ex9C115-185		
Surface mount adapter for remote mounting	AD54UL		

Frame Size	500A			
Current Setting Range (A)	160-225	210-300	280-400	380-500
Short Circuit Rating, 3 Phase at 600 Vac (kA)	30			
Power Terminal	Bus Bar Only			
Power Terminal Torque in-lb (N.m)	310 (35)			
Matched Contactor Type	Ex9C225-500			
Surface mount adapter for remote mounting	AD55UL			

* AWG = American Wire Gauge

Thermal Overload Relay

Ex9R - Thermal Overload Relay (For Ex9CS Miniature Contactors)



12 A

Rated Amperage (Min - Max)	Use with Contactors: Ex9CS06-12
	Catalog Number
0.1-0.16	Ex9R12B0.16A
0.16-0.25	Ex9R12B0.25A
0.25-0.4	Ex9R12B0.4A
0.4-0.63	Ex9R12B0.63A
0.63-1	Ex9R12B1A
1-1.6	Ex9R12B1.6A
1.6-2.5	Ex9R12B2.5A
2.5-4	Ex9R12B4A
4-6	Ex9R12B6A
5.5-8	Ex9R12B8A
7-10	Ex9R12B10A
9-12	Ex9R12B12A

			Ex9R
Tripping Class			Class 10/10A
Operating Frequency (Hz)			50/60
Phase Failure Protection Function			Yes
Automatic and Manual Reset			
Temperature Compensation			
Tripping Indicator			
Test and Stop Pushbutton			
Environmental Conditions	Altitude ft (m)		<6,562 (2,000)
	Pollution Degree		Class III
Rated Tripping Current (In)			1.2
Sensitivity to Phase Failure (In)			30%
Rated Working Voltage (V)			600
Rated Impulse Withstand Voltage Uimp			6 kV
Auxiliary Contacts	Number of Contacts		1NO+1NC
	Rated Operating Voltage Ue (V)	AC-15	220/380
		DC-13	220
	Rated Operating Current Ie (A)	AC-15	1.64 / 0.95
		DC-13	0.13
	Circuit Continuous Current		(5 A) 600 Vac, (1 A) 300 Vdc
	Contact Rating		B600, R300
	Terminal Wire Range AWG*		#18-12
	Terminal Torque in-lb (N.m)		15 (1.70)
Terminal Wire Strip Length in		0.43	

Ex9R	12 A											
Current Rated (A)	0.16-1.6						2.5-12					
Current Setting Range (A)	0.1-0.16	0.16-0.25	0.25-0.4	0.4-0.63	0.63-1	1-1.6	1.6-2.5	2.5-4	4-6	5.5-8	7-10	9-12
Short Circuit Rating, 3 Phase at 600 Vac (kA)	1						5					
Power Terminal	#18-10 AWG*											
Power Terminal Torque in-lb (N.m)	15 (1.7)											
Matched Contactor Type	Ex9CS06-12											
Matched Adapter	AD51UL											

* AWG = American Wire Gauge



AD51UL

Accessory Description	Catalog Number
Surface mount for Ex9R 0.16-12A only	AD51UL

Mounting Base	AD51UL
Current Rating (A)	12
Voltage (Vac)	600
Terminal Wire Range	#18-12 AWG*
Terminal Torque in-lb (N.m)	7 (0.80)
Matched Contactor Type	Ex9CS06-12

- Allows surface mounting of overload relays listed above (Ex9R 0.16-12A) remotely from miniature contactor (Ex9CS).

Disclaimer: Proper Sizing of an overcurrent protection device is the responsibility of the customer and should be determined using the application standards of the NEC*, CEC**, or other applicable standards.

*NEC-National Electrical Code

** CEC-Canadian Electrical Code

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Electronic Thermal Overload Relay

Ex9RE - Electronic Thermal Overload Relay



Rated Amperage (min-Max)	Power Supply Voltage	Auxiliary Contacts	Trip Curve Class	Catalog Number
Use with Ex9C 09-38A Contactor				
0.1 - 0.5A	24 Vac/Vdc	1NO+1NC	5/10/20/30	Ex9RE40A0.5
	110/120 Vac			Ex9RE40B0.5
	220/240 Vac			Ex9RE40C0.5
0.4 - 2A	24 Vac/Vdc	1NO+1NC	5/10/20/30	Ex9RE40A02
	110/120 Vac			Ex9RE40A02
	220/240 Vac			Ex9RE40C02
1.8 - 9A	24 Vac/Vdc	1NO+1NC	5/10/20/30	Ex9RE40A09
	110/120 Vac			Ex9RE40B09
	220/240 Vac			Ex9RE40C09
8 - 40A	24 Vac/Vdc	1NO+1NC	5/10/20/30	Ex9RE40A40
	110/120 Vac			Ex9RE40B40
	220/240 Vac			Ex9RE40C40



AD57UL

Accessory Description	Catalog Number
DIN Rail Mount for Ex9RE40 only	AD57UL

- Allows DIN rail mounting of electronic overload relays listed above (Ex9RE40) remotely from contactor (Ex9C).

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Safety Contactors

Ex9CA Product Overview


Features

The NOARK Ex9CA Safety Contactor is designed for use in safety function applications. It offers special features that allow the design of safe control circuits with current ratings up to 38 Amps.

The Normally Closed (NC) Auxiliary contact is a mirror contact to the main contacts and is mechanically linked to the Normally Open (NO) Auxiliary contacts. This allows for optimal design selections in SRP/CS*.

* SRP/CS is the term given by ISO short for safety-related part of a control system, meaning part of a control system that responds to safety-related input signals and generates safety-related output signals.

- Positively guided mirror contacts/mechanically linked contacts according to IEC/UL 60947-4-1 Annex F, IEC/UL 60947-5-1 Annex L
- Mirror contacts/ mechanically linked symbol on the side of auxiliary block
- Fixed transparent anti-dust cover for easy identification of the device action and prevents the manual operation
- AC or DC operating coils
- Integrated body with built in auxiliary contacts up to 2NC and 2NO
- Integrated surge suppression on DC coil models
- 5-Year limited warranty

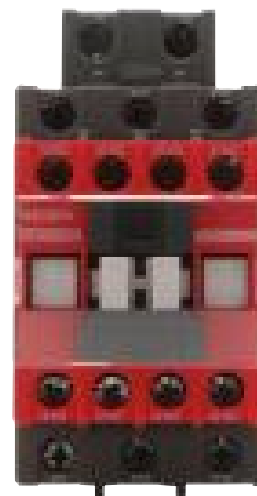

Certifications

- UL Listed, File Number E353865, UL 60947-1
- Certified for Canada CSA standards under cUL testing
- IEC/EN 60947-4-1
- CE Approved
- CCC Certified



Safety Contactors

Ex9CA 9 - 38 A



Certifications

IEC/EN 60947-4-1



Rated Amperage (A)		9A		12A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA0911G7	Ex9CA0922G7	Ex9CA1211G7	Ex9CA1222G7
DC	24	Ex9CA09D11B	Ex9CA09D22B	Ex9CA12D11B	Ex9CA12D22B

Rated Amperage (A)		18A		25A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles 3NO Auxiliary Contact - 1NO+1NC	Power Poles 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA1811G7	Ex9CA1822G7	Ex9CA2511G7	Ex9CA2522G7
DC	24	Ex9CA18D11B	Ex9CA18D22B	Ex9CA25D11B	Ex9CA25D22B

Rated Amperage (A)		32A		38A	
Coil Voltage		Catalog Number	Catalog Number	Catalog Number	Catalog Number
		Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC	Power Poles - 3NO Auxiliary Contact - 1NO+1NC	Power Poles - 3NO Auxiliary Contact - 2NO+2NC
AC	120	Ex9CA3211G7	Ex9CA3222G7	Ex9CA3811G7	Ex9CA3822G7
DC	24	Ex9CA32D11B	Ex9CA32D22B	Ex9CA38D11B	Ex9CA38D22B

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Safety Contactors

Technical Data

			Ex9CA					
			9	12	18	25	32	38
General Information								
Pole			3					
Production Standard			IEC 60947-1, IEC 60947-4-1, UL 60947-1, UL 60947-4-1, GB/T14048.4					
Environmental Testing According to			IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-11, IEC 60068-2-30					
Rated Frequency (Hz)			50/60					
Conventional Free Air Thermal Current Ith (A)	0≤104 °F (0≤40 °C)		25	32	40	50		
	0≤140 °F (0≤60 °C)							
	0≤158 °F (0≤70 °C)		17	22	28	35		
Rated Insulating Voltage Ui (V)			690					
Rated Impulse Withstand Voltage Uimp (kV)			6					
Electrical Life	AC-3	380/400 V	1,200,000					
	AC-4		50,000	40,000	50,000	40,000		
Mechanical Life			10,000,000					
Operating Cycles Per Hour (cycles/h)	AC-3		1,200		1,000			
	AC-4		300		150			
Environmental Temperature	Transportation or Storage		-76 to 176 °F (-60 to +80 °C)					
	Working At		-4 to 140 °F (-20 to +60 °C)					
	Maximum		-40 to 158 °F (-40 to +70 °C)					
Altitude ft (m)			<6,562 (2,000)					
Pollution Degree			Class III					
Rated Operating Voltage (U e)	AC 50/60 HZ		24, 48, 120, 240					
	DC							
Rated Operational Current Ie (A)								
At -82 to 131 °F (-25 to 40 °C)	AC-1	690V	25	32	40	50		
	AC-3	380/400V	9	12	18	25	32	38
	AC-3	660/690V	6.7	9	10.6	17.3	21.9	
	AC-4	380/400V	9	12	18	25	32	
	AC-4	660/690V	6.7	8.9	14	17.3		
Rated Power of 3-Phase Motor								
For IEC (kW)	AC-3	230 Vac	-					
	AC-4							
	AC-3	380/400 Vac	4	5.5	7.5	11	15	18.5
	AC-4						15	
	AC-3	660/690 Vac	5.5	7.5	9	15	18.5	
	AC-4		5.5	7.5	11	15		
	AC-3	1,000 Vac	-					
AC-4								
UL Rating								
Ith (A)			25	32	40	50		
Single-Phase (HP)	110-120 Vac		0.5	1	1.5	2	3	
	220-240 Vac		1.5	2	3		5	
Three-Phase (HP)	200-208 Vac		3		5	7.5	10	
	220-240 Vac							
	440-480 Vac		5	7.5	10	15	20	
	550-600 Vac		7.5	10	15	20	25	

Safety Contactors

Technical Data


			Ex9CA					
			9	12	18	25	32	38
Auxiliary Contact Amerperage Ratings								
A600 AC (V)	Make and emergency interrupting capacity (Amp)	120V (A)	60					
		240V (A)	30					
		480V (A)	15					
		600V (A)	12					
	Normal load break (Amp)	120V (A)	6					
		240V (A)	3					
		480V (A)	1.6					
		600V (A)	1.2					
	Thermal current (Amp)		10					
Q600 DC (V)	Make and emergency interrupting capacity (Amp)	125V (A)	0.55					
		250V (A)	0.27					
		440V (A)	0.1					
		600V (A)	0.1					
	Normal load break (Amp)	125V (A)	0.55					
		250V (A)	0.27					
		440V (A)	0.1					
		600V (A)	0.1					
	Thermal current (Amp)		2.5					
Tolerance of Control Voltage								
AC control (50/60 Hz)		pick-up (Operating Voltage)	85...110%					
		dropout (Operating Voltage)	20...75%					
DC control		pick-up (Operating Voltage)	80...110%					
		dropout (Operating Voltage)	10...75%					
Coil Power Consumption								
AC control (50/60 Hz)		pick-up (VA)	120VA (Ex9CA09-18)/140VA (Ex9CA25-38)					
		hold-in (VA)	12VA (Ex9CA09-18)/14VA (Ex9CA25-38)					
DC control		pick-up (W)	≤70					
		hold-in (W)	≤3.5					
Operating Time								
AC		closing delay (ms)	15...30					
		opening delay (ms)	15...25					
DC		closing delay (ms)	100...170					
		opening delay (ms)	30-100					
Typical Lifetime								
B ₁₀₀ Value (Electrical)		DC Coil	1,080,000			1,013,000		
		AC Coil	1,280,000			1,025,000		

Safety Control Relays

Ex9RCA Product Overview

Features

The NOARK Electric Ex9RCA Safety Control Relay is designed to provide fail-safe performance for safety function applications. It features mechanically linked contacts for use on safety feedback circuits with up to 8 contacts. When installed, the normally closed contact is force guided with the normally open contacts, making the Ex9RCA ideal for SRP/CS*.



* SRP/CS is the term given by ISO short for safety-related part of a control system, meaning part of a control system that responds to safety-related input signals and generates safety-related output signals

- Force guided/mechanically linked contacts as per IEC/UL 60947-5-1 Annex L
- Mechanically linked contacts symbol prominently displayed on red front cover
- Fixed transparent anti-dust cover allows easy identification of device action and prevents manual operation
- 4-pole models available with AC or DC operating coils
- 8-pole models available DC only
- Easily mounts on DIN 35mm or panel
- 5-years limited warranty



Certifications

- UL 508 Listed, File No. E353865, UL 60947-1
- CSA C22.2 No. 14, File No. E353865
- IEC/EN 60947-5-1
- CE Approved
- CCC Certified



Safety Control Relays

Ex9RCA

Green Highlight = Most Popular



Certifications

IEC/EN 60947-4-1

CE

UL

LISTED

Coil Voltage		4-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 1NO+3NC	Contact Configuration 2NO+2NC	Contact Configuration 3NO+1NC
Vac	120	Ex9RCA13G	Ex9RCA22G	Ex9RCA31G
Vdc	24	Ex9RCADBS	Ex9RCA22DBS	Ex9RCA31DBS



Coil Voltage		8-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 2NO+6NC	Contact Configuration 3NO+5NC	Contact Configuration 4NO+4NC
Vdc	24	Ex9RCA26DBS	Ex9RCA35DBS	Ex9RCA35DBS

Coil Voltage		8-Pole		
		Catalog Number	Catalog Number	Catalog Number
		Contact Configuration 5NO+3NC	Contact Configuration 6NO+2NC	Contact Configuration 7NO+1NC
Vdc	24	Ex9RCA53DBS	Ex9RCA62DBS	Ex9RCA71DBS


Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

Safety Control Relay

Technical Data

General Information			Ex9RCA	
Poles			4, 8	
Production Standard			UL 60947-5-1, GB/T 14048.5, IEC/EN 60947-5-1	
Rated Operating Voltage (U _e)	AC 50/60 HZ		24, 120	
Rated Insulating Voltage U _i (V)	DC		24	
	IEC		690	
	UL, CSA		600	
Rated Impulse Withstand Voltage U _{imp} (kV)			6	
Electrical Life AC-15 (240V/2A)			1,000,000	
Mechanical Life			10,000,000	
Protection Class			IP20	
Ambient Temperature	Transportation or Storage (°C)		-60...+80	
	Operation at rated voltage (°C)		-20...+60	
Max. Altitude of Installation Site ft (m)			<6,562 (2,000)	
Minimum operating current			8mA/24V	
Contact Ratings			Main and Auxiliary Contacts (A600)	
AC Ratings Maximum Amps (A)		AC Volts (V)	Make	Break
		120	60	6
		240	30	3
		480	15	1.6
		600	12	1.2
	Thermal current (Amp)		10	
DC Ratings Maximum Amps (A)	Minimum Contact Switching Ratings	DC Volts (V)	Auxiliary Contacts (Q600)	Power Contacts (P600)
		24	2.8	5.0
		48	1.2	2.5
		125	0.55	1.10
		250	0.27	0.55
		301 to 600	0.10	0.20
	Thermal current (Amp)		2.5	5.0
Load Carrying Capacity per UL				
Rated voltage AC (V)			Max. 600	
Continuous rating 40 °C (A)			10	
Switching capacity AC (A)			A600	
Rated voltage DC (V)			Max. 600	
Switching capacity DC (A)			Auxiliary Contacts Q600	Power Contacts P600
Tolerance of Control Voltage				
AC control (50/60 Hz)	pick-up (x Operating Voltage)		85%...110%	
	dropout (x Operating Voltage)		20%...75%	
DC control	pick-up (x Operating Voltage)		80%...110% (4-Pole), 85%...110%	
	dropout (x Operating Voltage)		10%...75%	
Coil Power Consumption				
AC control(50/60 Hz)	pick-up (VA)		40	
	hold-in (VA)		9	
DC control	pick-up (W)		3.2-4.0	
	hold-in (W)		3.2-4.0	
Operating Time				
AC	closing delay (ms)		15...30	
	opening delay (ms)		15...25	
DC	closing delay (ms)		25-40	
	opening delay (ms)		10...15	

22 mm Pilot Devices
Product Guide

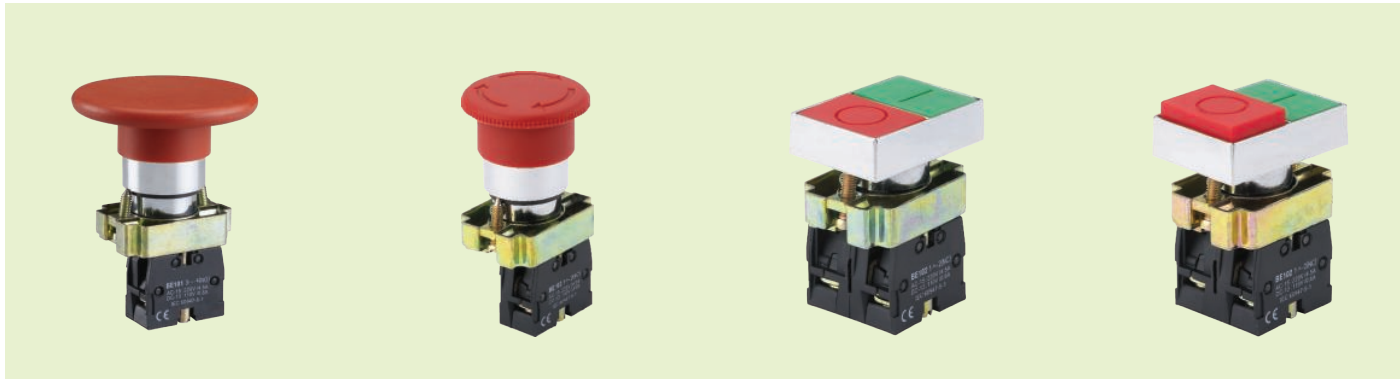

22 mm Indicator Lights

Ex9IL Product Overview

Features

- UL Recognized component and IP65 rated
- Compact profile and depth
- Operators mount in a round 7/8 in (22.5 mm) hole that is interchangeable with other industry products
- Modular construction makes assembly fast and simple



Certifications

- UL Recognized component, File no. E353866
- CSA C22.2 No. 14, File no. E353866
- IEC/EN 60947
- VDE 0660
- CE Approved



22 mm Indicator Lights

Ex9IL2 Compact Pilot Lights



NOARK
Ex9IL2
LED
AC 220V
≤ 20mA
IEC/EN 60947-5-1

Certifications

IEC/EN 60947-5-1

CE cUL US



NOARK
Ex9IL2
LED
AC 220V
≤ 20mA
IEC/EN 60947-5-1

Green Highlight = Most Popular

Resistance Type

Color	LED Lamp Voltage (Vac/dc)	Catalog Number
●	12	Ex9IL2C3
●	12	Ex9IL2C4
○	24	Ex9IL2D1
●	24	Ex9IL2D3
●	24	Ex9IL2D4
●	24	Ex9IL2D5
●	24	Ex9IL2D6

Capacitance Type

Color	LED Lamp Voltage (Vac)	Catalog Number
○	110/120	Ex9IL2N1
●	110/120	Ex9IL2N3
●	110/120	Ex9IL2N4
●	110/120	Ex9IL2N5
●	110/120	Ex9IL2N6
●	220/240	Ex9IL2H3
●	220/240	Ex9IL2H4

Specifications

		Ex9IL
Rated Operational Voltage Ue (V)	Vac	12-240
	Vdc	12-24
Rated Operational Current (mA)		Ie≤20
Service Life (h)		≥30,000
Brightness (cd/m²)		≥60
Standard Colors		(Green) ● (Red) ●
Other Available Colors		(White)○ (Yellow) ● (Blue) ●

Note: For AC power supply, the limit voltage range is 0.85Ue-1.1Ue between terminals.

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbuttons

Ex9PB Product Overview

Features

- Metal construction for superior durability and visual appeal
- UL recognized component and labeled IP40 rated (can be customized into IP65)
- LED replaceable lamps are standard
- Low behind the panel depth
- Operators mount in a round 7/8 in (22.5 mm) hole that is interchangeable with competitor's products
- Field convertible from maintained to momentary (available on maintained pushbuttons only)
- More than one million mechanical operations on momentary and half million on maintained pushbuttons



Certifications

- UL Recognized Component, File No. E353865
- CSA C22.2 No. 14, File no. E353865
- IEC/EN 60947
- VDE 0660
- CE Approved



Specifications

		Ex9PB
Rated Operational Voltage Ue (V)		125
Rated Operational Current (A)	DC-13	0.55
Illuminated Button Lamp Parameters		Direct Type LED Lamp
Rated Operational Current Ie (mA)		Ie≤20
Rated Operational Voltage (V)		6-230 Vac/dc

Note: Conventional thermal current Ith: 10A

22 mm Pushbuttons

Momentary Non-Illuminated



Momentary Flush*		
Color	Contacts	Catalog Number
○	1NO	Ex9PBA11
●		Ex9PBA21
●		Ex9PBA31
●		Ex9PBA41
●		Ex9PBA51
●		Ex9PBA61
○	1NC	Ex9PBA12
●		Ex9PBA22
●		Ex9PBA32
●		Ex9PBA42
●		Ex9PBA52
●		Ex9PBA62
○	1NO+1NC	Ex9PBA15
●		Ex9PBA25
●		Ex9PBA35
●		Ex9PBA45
●		Ex9PBA55
●		Ex9PBA65

Momentary Flush+Symbol*		
Color	Contacts	Catalog Number
●	1NO	Ex9PBA3311
●	1NC	Ex9PBA4322



Momentary Extended		
Color	Contacts	Catalog Number
●	1NO	Ex9PBL31
●	1NC	Ex9PBL42

* Ex9PBA momentary flush pushbuttons available up to IP 65. Contact a NOARK representative for more information.



Momentary ø40 mm Mushroom Head		
Color	Contacts	Catalog Number
●	1NO+1NC	Ex9PBC35
●		Ex9PBC45



Momentary ø60 mm Mushroom Head		
Color	Contacts	Catalog Number
●	1NO+1NC	Ex9PBR35
●		Ex9PBR45

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.


22 mm Pushbuttons

Momentary and Push On/Twist Off Non-Illuminated



Certifications

IEC/EN 60947-5-1



Push On/Twist Off ø30 mm Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS441
	1NC	Ex9PBS442
	2NO	Ex9PBS443
	2NC	Ex9PBS444
	1NO+1NC	Ex9PBS445

Momentary Double Head - Flush

Color	Contacts	Catalog Number
● + ●	1NO+1NC	Ex9PBL8325

Push On/Twist Off ø40 Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS541
	1NC	Ex9PBS542
	2NO	Ex9PBS543
	2NC	Ex9PBS544
	1NO+1NC	Ex9PBS545



Momentary Double Head - Extended

Color	Contacts	Catalog Number
● + ●	1NO+1NC	Ex9PBL8425

Push On/Twist Off ø60 Mushroom Head

Color	Contacts	Catalog Number
●	1NO	Ex9PBS641
	1NC	Ex9PBS642
	2NO	Ex9PBS643
	2NC	Ex9PBS644
	1NO+1NC	Ex9PBS645

22 mm Pushbuttons

Selector Switch Non-Illuminated



Certifications

IEC/EN 60947-5-1

CE

C

UL

US




Selector Switch - Rotary Knob		
Positions	Contacts	Catalog Number
2-Position		
	1NO+1NC	Ex9PBD25
	1NO+1NC	Ex9PBD45
3-Position		
	2NO	Ex9PBD33
	1NO+1NC	Ex9PBD35
	2NO	Ex9PBD53
	1NO+1NC	Ex9PBD55



Selector Switch - Rotary Handle		
Positions	Contacts	Catalog Number
2-Position		
	1NO+1NC	Ex9PBJ25
	1NO+1NC	Ex9PBJ45
3-Position		
	2NO	Ex9PBJ33
	1NO+1NC	Ex9PBJ35
	2NO	Ex9PBJ53
	1NO+1NC	Ex9PBJ55

Selector Switch - Key		
Positions	Contacts	Catalog Number
2-Position		
	1NO+1NC	Ex9PBG25
	1NO+1NC	Ex9PBG45
	1NO+1NC	Ex9PBG25B
3-Position		
	2NO	Ex9PBG33
	1NO+1NC	Ex9PBG35
	2NO	Ex9PBG53
	1NO+1NC	Ex9PBG55
	2NO	Ex9PBG33D
	1NO+1NC	Ex9PBG35D

= Key removed at this position only.

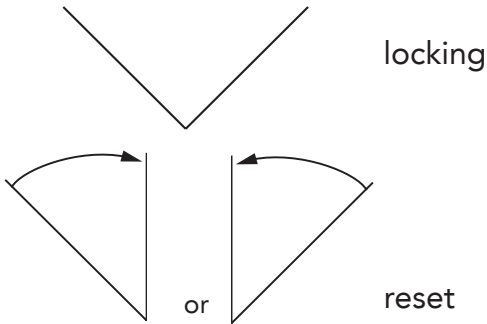

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbuttons

Illuminated and Contact Blocks



Momentary Flush with Guard		
Color	LED Lamp Voltage Vac/dc	Catalog Number
1NO		
Yellow	24	Ex9PBW3561D
Blue	24	Ex9PBW3661D
2NO		
Green	24	Ex9PBW3363D
Green	230	Ex9PBW3363H
1NO+1NC		
Green	24	Ex9PBW3365D
Red		Ex9PBW3465D
Green	110	Ex9PBW3365N
Red		Ex9PBW3465N

Momentary Double Head - Flush+Projecting		
Color	Contacts	Catalog Number
1NO+1NC		
Red + Green	24	Ex9PBW8465D
	110	Ex9PBW8465N



Indicator Light		
Color	LED Lamp Voltage Vac/dc	Catalog Number
1NO+1NC		
Green	24	Ex9PBV63D
Red		Ex9PBV64D
Green	110	Ex9PBV63N
Red		Ex9PBV64N

Contact Blocks		
Accessory Description	Poles	Catalog Number
Contact Block	NO	Ex9PBE101
Contact Block	NC	Ex9PBE102

Additional products, accessories and higher ratings available. Contact your NOARK representative or visit na.noark-electric.com for additional information.

22 mm Pushbutton Accessories

Ex9PB Enclosures



Accessory Description	Catalog Number
Enclosure Start <i>(Pushbuttons included)</i>	Ex9PB101H29
Enclosure Stop/Start Rotary Handle <i>(Pushbuttons included)</i>	Ex9PB132H29



Accessory Description	Catalog Number
Enclosure Start/Stop <i>(Pushbuttons included)</i>	Ex9PB211H29
Enclosure Start/Stop <i>(Pushbuttons included)</i>	Ex9PB213
Enclosure Start/Stop <i>(Pushbuttons included)</i>	Ex9PB215

Appendix A

Short Circuit Current Rating Tables

UL60947-4-1 and CSA C22.2 No. 60947-4-1 Short Circuit Current Ratings

UL 60947-4-1 and CSA C22.2 No. 60947-4-1 are the safety standards for industrial control equipment in the USA and Canada. They may be used in place of UL508 and CSA C22.2 No. 14, which are superseded by this harmonized standard.

Establishing the Short Circuit Current Rating (SCCR) of an industrial control panel is an important factor in meeting the requirements of UL 60947-4-1 and its CSA equivalent. This rating establishes the maximum short circuit current that the entire control panel can safely withstand. This required rating is based on the magnitude of the fault current that is available at the control panel's incoming terminals.

The standard defines three separate methods to determine the SCCR of the control panel, based on the individual ratings of the current-carrying components:

- Use the SCCR value marked on each component. The control panel must be labeled with the SCCR value of the lowest-rated component.
- Use assumed SCCR values in Table SB4.1 of Supplement SB. The control panel must be labeled with the SCCR value of the lowest rated component.
- Use the tested SCCR from component combinations per UL 508. In this method, individual motor branch circuit components are tested together in specific combinations to achieve a system or "combination" rating. This combination rating is not specifically limited by each individual component rating.

The tables in this Appendix show all the tested combinations of Noark Electric Molded Case Breakers, Motor Contactors and Overload Relays.

UL 60947-4-1 Combination Motor Controllers

UL 60947-4-1 defines the components, product standards, testing and performance requirements for five types of combination motor controller (also called a combination starter) arrangements. Each of these five styles meet the requirements of the NEC and CEC installation codes for motor branch circuit protection. The table below outlines the products and standards used in each combination type.

UL60947-4-1 and CSA C22.2 No. 60947-4-1 Combination Starter Types

Type	Disconnect Device	Short Circuit Protection	Overload Protection	Motor Controller
A	UL 98 Disconnect Switch	UL 248 Fuses	UL 60947-4-1 Overload Relay (Thermal or Electronic)	UL 60947-4-1 Magnetic Contactor
C	UL 489 Molded Case Breaker (Thermal-Magnetic or Electronic)			
D	UL 489 Motor Circuit Protector (Instantaneous Magnetic Only)		UL 60947-4-1 Overload Relay (Thermal or Electronic)	UL 60947-4-1 Magnetic Contactor
E	UL 60947-4-1 Self-Protected Manual Motor Starter			
F	UL 60947-4-1 Self-Protected Manual Motor Starter			UL 60947-4-1 Magnetic Contactor

Table A1: Type C Short Circuit Current Ratings

200Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload
3	10.6	65	M1N15T3L	Ex9C09...	Ex9R38B...
				Ex9C12...	Ex9RE40...
		100	M1H15T3L	Ex9C09...	Ex9R38B...
				Ex9C12...	Ex9RE40...
5	16.7	65	M1N30T3L	Ex9C18...	Ex9R38B...
		100	M1H30T3L	Ex9C18...	Ex9RE40...
7.5	24.2	65	M1N50T3L	Ex9C25...	Ex9R38B...
		100	M1H50T3L	Ex9C25...	Ex9RE40...
10	30.8	65	M1N50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
		100	M1N70T3L	Ex9C40...	Ex9R100B...
			M1H50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
			M1H70T3L	Ex9C40...	Ex9R100B...
15	48.3	65	M1N70T3L	Ex9C50...	Ex9R100B...
20	62.1	65	M1N100T3L	Ex9C100...	Ex9R100B...
		100	M1H100T3L		
30	88	65	M1N150T3L	Ex9C80...	Ex9R100B...
		100	M1H150T3L	Ex9C80...	
40	114	65	M2N200T3L	Ex9C115...	Ex9R185B...
		100	M2H200T3L	Ex9C115...	Ex9R185B...
50	143	65	M2N200T3L	Ex9C150...	Ex9R185B...
		100	M2H200T3L	Ex9C150...	Ex9R185B...
60	169	65	M2N250T3L	Ex9C185...	Ex9R185B...
		100	M2H250T3L	Ex9C225...	Ex9R500B...
75	211	65	M3N400T3L	Ex9C185...	Ex9R185B...
		100	M3H400T3L	Ex9C225...	Ex9R500B...
100	273	65	M3N400T3L	Ex9C265...	Ex9R500B...
		100	M3H400T3L	Ex9C300...	Ex9R500B...
125	343	65	M4N500T3L	Ex9C400...	Ex9R500B...
		100	M4H500T3L	Ex9C400...	Ex9R500B...
150	396	65	M4N600T3L	Ex9C500...	Ex9R500B...
		100	M4H600T3L	Ex9C500...	Ex9R500B...

Appendix A

Short Circuit Current Rating Tables

Table A2: Type C Short Circuit Current Ratings					
208Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
3	11	65	M1N15T3L	Ex9C09...	Ex9R38B...
					Ex9RE40...
				Ex9C12...	Ex9R38B...
		100	M1H15T3L	Ex9C09...	Ex9RE40...
					Ex9R38B...
				Ex9C12...	Ex9RE40...
5	17.5	65	M1N30T3L	Ex9C18...	Ex9R38B...
		100	M1H30T3L	Ex9C18...	Ex9RE40...
					Ex9R38B...
7.5	25.3	65	M1N30T3L	Ex9C25...	Ex9R38B...
		100	M1H30T3L	Ex9C25...	Ex9RE40...
					Ex9R38B...
10	32.2	65	M1N50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
			M1N70T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
		100	M1H50T3L	Ex9C32...	Ex9RE40...
				Ex9C38...	Ex9R38B...
				Ex9C38...	Ex9RE40...
			M1H70T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
				Ex9C40...	Ex9R100B...
15	48.3	65	M1N70T3L	Ex9C50...	Ex9R100B...
		100	M1H70T3L	Ex9C50...	Ex9R100B...
20	62.1	65	M1N100T3L	Ex9C65...	Ex9R100B...
		100	M1N100T3L	Ex9C65...	Ex9R100B...
30	92	65	M1N150T3L	Ex9C80...	Ex9R100B...
		100	M1H150T3L	Ex9C100...	
				Ex9C100...	
40	120	65	M2N200T3L	Ex9C115...	Ex9R185B...
		100	M2H200T3L	Ex9C115...	Ex9R185B...
50	150	65	M2N200T3L	Ex9C150...	Ex9R185B...
		100	M2N200T3L	Ex9C150...	Ex9R185B...
60	177	65	M2N250T3L	Ex9C150...	Ex9R185B...
		100	M2H250T3L	Ex9C225...	Ex9R500B...
				Ex9C225...	Ex9R500B...
75	221	65	M3N400T3L	Ex9C265...	Ex9R500B...
		100	M3H400T3L	Ex9C265...	Ex9R500B...
100	285	65	M3N400T3L	Ex9C300...	Ex9R500B...
		100	M3H400T3L	Ex9C300...	Ex9R500B...
125	359	65	M4N500T3L	Ex9C400...	Ex9R500B...
		100	M4H500T3L	Ex9C400...	Ex9R500B...
150	414	65	M4N600T3L	Ex9C500...	Ex9R500B...
		100	M4N600T3L	Ex9C500...	Ex9R500B...

Table A3: Type C Short Circuit Current Ratings					
240Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
3	9.6	65	M1N15T3L	Ex9C09...	Ex9R38B...
					Ex9RE40...
				Ex9C12...	Ex9R38B...
		100	M1H15T3L	Ex9C09...	Ex9RE40...
					Ex9R38B...
				Ex9C12...	Ex9RE40...
5	15.2	65	M1N30T3L	Ex9C18...	Ex9R38B...
		100	M1H30T3L	Ex9C18...	Ex9RE40...
					Ex9R38B...
7.5	22	65	M1N30T3L	Ex9C25...	Ex9R38B...
		100	M1H30T3L	Ex9C25...	Ex9RE40...
					Ex9R38B...
10	28	65	M1N50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
			M1H50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
		100	M1H50T3L	Ex9C32...	Ex9RE40...
				Ex9C38...	Ex9R38B...
				Ex9C38...	Ex9RE40...
			M1H70T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9RE40...
				Ex9C40...	Ex9R100B...
15	42	65	M1N70T3L	Ex9C40...	Ex9R100B...
		100	M1H70T3L	Ex9C40...	Ex9R100B...
20	54	65	M1N70T3L	Ex9C50...	Ex9R100B...
		100	M1H70T3L	Ex9C50...	Ex9R100B...
25	68	65	M1N100T3L	Ex9C65...	Ex9R100B...
		100	M1H100T3L	Ex9C65...	Ex9R100B...
30	80	65	M1N100T3L	Ex9C80...	Ex9R100B...
		100	M1H100T3L	Ex9C80...	Ex9R100B...
40	104	65	M1N150T3L	Ex9C100...	Ex9R100B...
		100	M1H150T3L	Ex9C100...	Ex9R100B...
50	130	65	M2N200T3L	Ex9C115...	Ex9R185B...
		100	M2H200T3L	Ex9C115...	Ex9R185B...
60	154	65	M2N200T3L	Ex9C150...	Ex9R185B...
		100	M2H200T3L	Ex9C150...	Ex9R185B...
75	192	65	M2N250T3L	Ex9C185...	Ex9R185B...
		100	M2H250T3L	Ex9C225...	Ex9R500B...
				Ex9C225...	Ex9R500B...
100	248	65	M3N400T3L	Ex9C265...	Ex9R500B...
		100	M3H400T3L	Ex9C265...	Ex9R500B...
125	312	65	M3N400T3L	Ex9C300...	Ex9R500B...
		100	M3H400T3L	Ex9C300...	Ex9R500B...
150	360	65	M4N500T3L	Ex9C400...	Ex9R500B...
		100	M4H500T3L	Ex9C400...	Ex9R500B...
200	480	65	M4N600T3L	Ex9C500...	Ex9R500B...
		100	M4H600T3L	Ex9C500...	Ex9R500B...

Appendix A

Short Circuit Current Rating Tables

Table A4: Type C Short Circuit Current Ratings					
480Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
5	7.6	35	M1S15T3L	Ex9C09...	Ex9R38B...
		65	M1N15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1H15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
7.5	11	35	M1S15T3L	Ex9C12...	Ex9R38B...
		65	M1N15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
		100	M1H15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
10	14	35	M1S30T3L	Ex9C18...	Ex9R38B...
		65	M1N30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
		100	M1H30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
15	21	35	M1S30T3L	Ex9C25...	Ex9R38B...
		65	M1N30T3L	Ex9C25...	Ex9R38B... Ex9RE40...
		100	M1H30T3L	Ex9C25...	Ex9R38B... Ex9RE40...
20	27	35	M1S50T3L	Ex9C32...	Ex9R38B...
				Ex9C38...	Ex9R38B...
		65	M1N50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
		100	M1H50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
30	40	35	M1S70T3L		
		65	M1N70T3L	Ex9C40...	Ex9R100B...
		100	M1H70T3L		
40	52	35	M1S70T3L		
		65	M1N70T3L	Ex9C50...	Ex9R100B...
		100	M1H70T3L		
50	65	35	M1S100T3L		
		65	M1N100T3L	Ex9C65...	Ex9R100B...
		100	M1H100T3L		
60	77	35	M1S100T3L	Ex9C100...	Ex9R100B...
				Ex9C80...	
		65	M1N100T3L	Ex9C100...	Ex9R100B...
100	124	35	M2S200T3L		
		65	M2N200T3L	Ex9C115...	Ex9R185B...
		100	M2H200T3L		
125	156	35	M2S200T3L		
		65	M2N200T3L	Ex9C150...	Ex9R185B...
		100	M2H200T3L		
150	180	35	M2S250T3L	Ex9C185...	Ex9R185B...
				Ex9C225...	
		65	M2N250T3L	Ex9C185...	Ex9R185B...
200	240	35	M3S400T3L		
		65	M3N400T3L	Ex9C265...	Ex9R500B...
		100	M3H400T3L		
250	302	35	M3S400T3L		
		65	M3N400T3L	Ex9C300...	Ex9R500B...
		100	M3H400T3L		
300	361	35	M4S500T3L		
		65	M4N500T3L	Ex9C400...	Ex9R500B...
		100	M4H500T3L		
400	477	35	M4S600T3L		
		65	M4N600T3L	Ex9C500...	Ex9R500B...
		100	M4H600T3L		

Table A5: Type C Short Circuit Current Ratings					
600Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
7.5	9	20	M1N15T3L		
		25	M1H15T3L	Ex9C09...	Ex9RE40...
10	11	20	M1N15T3L		
		25	M1H15T3L	Ex9C12...	Ex9RE40...
15	17	20	M1N30T3L		
		25	M1H30T3L	Ex9C18...	Ex9RE40...
20	22	20	M1N30T3L		
		25	M1H30T3L	Ex9C25...	Ex9RE40...
25	27	20	M1N50T3L		
		20		Ex9C32...	Ex9RE40...
		25		Ex9C38...	
		25	M1H50T3L	Ex9C32...	Ex9RE40...
30	32	20	M1N70T3L		
		25	M1H70T3L	Ex9C40...	Ex9R100B...
40	41	20	M1N70T3L		
		25	M1H70T3L	Ex9C50...	Ex9R100B...
50	52	20	M1N70T3L		
		25	M1H70T3L	Ex9C65...	Ex9R100B...
60	62	20	M1N100T3L		
		20		Ex9C100...	Ex9R100B...
		25		Ex9C80...	
		25	M1H100T3L	Ex9C100...	Ex9R100B...
125	125	20	M2N200T3L		
		25	M2H200T3L	Ex9C115...	Ex9R185B...
150	144	20	M2N200T3L		
		25	M2H200T3L	Ex9C150...	Ex9R185B...
200	192	20	M2N250T3L		
		20		Ex9C185...	Ex9R185B...
		25		Ex9C225...	
		25	M2H250T3L	Ex9C185...	Ex9R185B...
250	242	18	M3S400T3L		
		25	M3N400T3L	Ex9C265...	Ex9R500B...
		30	M3N400T3L		
300	289	18	M3S400T3L		
		25	M3S400T3L	Ex9C300...	Ex9R500B...
		30	M3H400T3L		
400	382	22	M4S500T3L		
		30	M4N500T3L	Ex9C400...	Ex9R500B...
		50	M4N500T3L		
500	472	22	M4S600T3L		
		30	M4N600T3L	Ex9C500...	Ex9R500B...
		50	M4H600T3L		

Appendix A

Short Circuit Current Rating Tables

Table A6: Type D Short Circuit Current Ratings					
200Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactors	Overload Relay
3	2.5	65	M1MN3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	4.8	65	M1MN7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	7.8	65	M1MN15T3L	Ex9C09...	Ex9RE40...
		100	M1MH15T3L	Ex9C12...	Ex9RE40...
				Ex9C09...	Ex9RE40...
	11	65	M1MN15T3L	Ex9C12...	Ex9R38B...
				Ex9C09...	Ex9R38B...
		100	M1MH15T3L	Ex9C12...	Ex9R38B...
5	17.5	65	M1MN30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
7.5	25.3	65	M1MH50T3L	Ex9C25...	Ex9R38B... Ex9RE40...
		100	M1MH50T3L	Ex9C25...	Ex9R38B... Ex9RE40...
10	32.2	65	M1MN50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
			M1MN70T3L	Ex9C40...	Ex9R100B...
		100	M1MH50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
			M1MH70T3L	Ex9C40...	Ex9R100B...
15	48.3	65	M1MN70T3L	Ex9C50...	Ex9R100B...
20	62.1	65	M1MN100T3L	Ex9C65...	Ex9R100B...
30	92	65	M1MN150T3L	Ex9C100...	Ex9R100B...
		100	M1MH150T3L	Ex9C100...	Ex9R100B...
40	120	65	M2MN250T3L	Ex9C115...	Ex9R185B...
		100	M2MH250T3L	Ex9C115...	Ex9R185B...
50	150	65	M2MN250T3L	Ex9C150...	Ex9R185B...
		100	M2MH250T3L	Ex9C150...	Ex9R185B...
60	177	65	M2MN250T3L	Ex9C185...	Ex9R185B...
		100	M2MH250T3L	Ex9C225...	Ex9R500B...
				Ex9C185...	Ex9R185B...
				Ex9C225...	Ex9R500B...
75	221	65	M3MN400T3L	Ex9C265...	Ex9R500B...
		100	M3MH400T3L	Ex9C265...	Ex9R500B...
100	285	65	M3MN400T3L	Ex9C300...	Ex9R500B...
		100	M3MH400T3L	Ex9C300...	Ex9R500B...
125	359	65	M4MN600T3L	Ex9C400...	Ex9R500B...
		100	M4MH600T3L	Ex9C400...	Ex9R500B...
150	414	65	M4MN600T3L	Ex9C500...	Ex9R500B...
		100	M4MH600T3L	Ex9C500...	Ex9R500B...

Table A7: Type D Short Circuit Current Ratings					
208Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactors	Overload Relay
3	2.4	65	M1MN3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	4.6	65	M1MN7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	10.6	65	M1MN15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		65	M1MN15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
				Ex9C12...	Ex9R38B... Ex9RE40...
	10.6	100	M1MH15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
				Ex9C12...	Ex9R38B... Ex9RE40...
5	16.7	65	M1MN30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
7.5	24.2	65	M1MN50T3L	Ex9C25...	Ex9R38B... Ex9RE40...
		100	M1MH50T3L	Ex9C25...	Ex9R38B... Ex9RE40...
10	30.8	65	M1MN50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
			M1MN70T3L	Ex9C40...	Ex9R100B...
		100	M1MH50T3L	Ex9C32...	Ex9R38B... Ex9RE40...
				Ex9C38...	Ex9R38B... Ex9RE40...
			M1MH70T3L	Ex9C40...	Ex9R100B...
15	46.2	65	M1MN70T3L	Ex9C50...	Ex9R100B...
20	59.4	65	M1MN100T3L	Ex9C65...	Ex9R100B...
		100	M1MH100T3L	Ex9C65...	Ex9R100B...
30	88	65	M1MN150T3L	Ex9C100...	Ex9R100B...
		100	M1MH150T3L	Ex9C100...	Ex9R100B...
40	114	65	M2MN250T3L	Ex9C115...	Ex9R185B...
		100	M2MH250T3L	Ex9C115...	Ex9R185B...
50	143	65	M2MN250T3L	Ex9C150...	Ex9R185B...
		100	M2MH250T3L	Ex9C150...	Ex9R185B...
60	169	65	M2MN250T3L	Ex9C185...	Ex9R185B...
		100	M2MH250T3L	Ex9C185...	Ex9R185B...
75	211	65	M3MN400T3L	Ex9C265...	Ex9R500B...
		100	M3MH400T3L	Ex9C265...	Ex9R500B...
100	273	65	M3MN400T3L	Ex9C300...	Ex9R500B...
		100	M3MH400T3L	Ex9C300...	Ex9R500B...
125	343	65	M4MN600T3L	Ex9C400...	Ex9R500B...
		100	M4MH600T3L	Ex9C400...	Ex9R500B...
150	396	65	M4MN600T3L	Ex9C500...	Ex9R500B...
		100	M4MH600T3L	Ex9C500...	Ex9R500B...

Appendix A

Short Circuit Current Rating Tables

Table A8: Type D Short Circuit Current Ratings					
240Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
3	2.2	65	M1MN3T3L	Ex9C09...	Ex9R38B...
		100	M1MH3T3L		
	6	65	M1MN7T3L	Ex9C09...	
		100	M1MH7T3L		
	9.6	65	M1MN15T3L	Ex9C09... Ex9C12...	
		100	M1MH15T3L	Ex9C09... Ex9C12...	
5	15.2	65	M1MN30T3L	Ex9C18...	Ex9R38B...
		100	M1MH30T3L		
7.5	22	65	M1MN30T3L	Ex9C25...	Ex9R38B...
		100	M1MH30T3L		
10	28	65	M1MN50T3L	Ex9C32... Ex9C38...	Ex9R38B...
		100	M1MH50T3L	Ex9C32... Ex9C38...	
15	42	65	M1MN70T3L	Ex9C40...	Ex9R100B...
		100	M1MH70T3L		
20	54	65	M1MN70T3L	Ex9C50...	Ex9R100B...
		100	M1MH70T3L		
25	68	65	M1MN100T3L	Ex9C65...	Ex9R100B...
		100	M1MH100T3L		
30	80	65	M1MN100T3L	Ex9C80...	Ex9R100B...
		100	M1MH100T3L		
40	104	65	M1MN150T3L	Ex9C100...	Ex9R100B...
		100	M1MH150T3L		
50	130	65	M2MN250T3L	Ex9C115...	Ex9R185B...
		100	M2MH250T3L		
60	154	65	M2MN250T3L	Ex9C150...	Ex9R185B...
		100	M2MH250T3L		
75	192	65	M2MN250T3L	Ex9C185... Ex9C225...	Ex9R185B... Ex9R500B...
				Ex9C225... Ex9R185B...	Ex9R500B...
		100	M2MH250T3L	Ex9C225... Ex9R500B...	Ex9R500B...
100	248	65	M3MN400T3L	Ex9C265...	Ex9R500B...
		100	M3MH400T3L		
125	312	65	M3MN400T3L	Ex9C300...	Ex9R500B...
		100	M3MH400T3L		
150	360	65	M4MN600T3L	Ex9C400...	Ex9R500B...
		100	M4MH600T3L		
200	480	65	M4MN600T3L	Ex9C500...	Ex9R500B...
		100	M4MH600T3L		

Table A9: Type D Short Circuit Current Ratings					
480Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
5	2.1	35	M1MS3T3L	Ex9C09...	Ex9R38B...
		65	M1MN3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH3T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	4.8	35	M1MS7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		65	M1MN7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH7T3L	Ex9C09...	Ex9R38B... Ex9RE40...
7.5	7.6	35	M1MS15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		65	M1MN15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
		100	M1MH15T3L	Ex9C09...	Ex9R38B... Ex9RE40...
	11	35	M1MS15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
		65	M1MN15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
		100	M1MH15T3L	Ex9C12...	Ex9R38B... Ex9RE40...
10	14	35	M1MS30T3L	Ex9C18...	Ex9R38B...
		65	M1MN30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C18...	Ex9R38B... Ex9RE40...
15	21	35	M1MS30T3L	Ex9C25...	Ex9R38B...
		65	M1MN30T3L	Ex9C25...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C25...	Ex9R38B... Ex9RE40...
		100	M1MH30T3L	Ex9C25...	Ex9R38B... Ex9RE40...
20	27	35	M1MS50T3L	Ex9C32... Ex9C38...	Ex9R38B... Ex9RE40...
					Ex9R38B... Ex9RE40...
		65	M1MN50T3L	Ex9C32... Ex9C38...	Ex9R38B... Ex9RE40...
					Ex9R38B... Ex9RE40...
		100	M1MH50T3L	Ex9C32... Ex9C38...	Ex9R38B... Ex9RE40...
					Ex9R38B... Ex9RE40...
30	40	35	M1MS70T3L	Ex9C40...	Ex9R100B...
		65	M1MN70T3L		
		100	M1MH70T3L		
40	52	35	M1MS70T3L	Ex9C50...	Ex9R100B...
		65	M1MN70T3L		
		100	M1MH70T3L		
50	65	35	M1MS100T3L	Ex9C65...	Ex9R100B...
		65	M1MN100T3L		
		100	M1MH100T3L		
60	77	35	M1MS100T3L	Ex9C100... Ex9C80...	Ex9R100B...
		65	M1MN100T3L	Ex9C100... Ex9C80...	
		100	M1MH100T3L	Ex9C100... Ex9C80...	
100	124	35	M2MS250T3L	Ex9C115...	Ex9R185B...
		65	M2MN250T3L		
		100	M2MH250T3L		
125	156	35	M2MS250T3L	Ex9C150...	Ex9R185B...
		65	M2MN250T3L		
		100	M2MH250T3L		
150	180	35	M2MS250T3L	Ex9C185... Ex9C225...	Ex9R185B... Ex9R500B...
			M2MN250T3L	Ex9C185... Ex9C225...	Ex9R185B... Ex9R500B...
			M2MH250T3L	Ex9C185... Ex9C225...	Ex9R185B... Ex9R500B...
200	240	35	M3MS400T3L	Ex9C265...	Ex9R500B...
		65	M3MN400T3L		
		100	M3MH400T3L		
250	302	35	M3MS400T3L	Ex9C300...	Ex9R500B...
		65	M3MN400T3L		
		100	M3MH400T3L		
300	361	35	M4MS600T3L	Ex9C400...	Ex9R500B...
		65	M4MN600T3L		
		100	M4MH600T3L		
400	477	35	M4MS600T3L	Ex9C500...	Ex9R500B...
		65	M4MN600T3L		
		100	M4MH600T3L		

Appendix A

Short Circuit Current Rating Tables

Table A10: Type D Short Circuit Current Ratings					
600Vac Maximum					
Motor (HP)	FLA (A)	SCCR (kA)	Molded Case Breaker	Contactor	Overload Relay
7.5	2.4	20	M1MN3T3L	Ex9C09...	Ex9RE40...
		25	M1MH3T3L		
	3.9	20	M1MN7T3L		
		25	M1MH7T3L		
	9	20	M1MN15T3L		
		25	M1MH15T3L		
10	11	20	M1MN15T3L	Ex9C12...	Ex9RE40...
		25	M1MH15T3L		
15	17	20	M1MN30T3L	Ex9C18...	Ex9RE40...
		25	M1MH30T3L		
20	22	20	M1MN30T3L	Ex9C25...	Ex9RE40...
		25	M1MH30T3L		
25	27	20	M1MN50T3L	Ex9C32...	Ex9RE40...
		20	M1MN50T3L	Ex9C38...	
		25	M1MH50T3L	Ex9C32...	
		25	M1MH50T3L	Ex9C38...	
30	32	20	M1MN70T3L	Ex9C40...	Ex9R100B...
		25	M1MH70T3L		
40	41	20	M1MN70T3L	Ex9C50...	Ex9R100B...
		25	M1MH70T3L		
50	52	20	M1MN70T3L	Ex9C65...	Ex9R100B...
		25	M1MH70T3L		
60	62	20	M1MN100T3L	Ex9C100...	Ex9R100B...
				Ex9C80...	
		25	M1MH100T3L	Ex9C100...	
				Ex9C80...	
125	125	20	M2MN250T3L	Ex9C115...	Ex9R185B...
		25	M2MH250T3L		
150	144	20	M2MN250T3L	Ex9C150...	Ex9R185B...
		25	M2MH250T3L		
200	192	20	M2MN250T3L	Ex9C185...	Ex9R185B...
				Ex9C225...	Ex9R500B...
		25	M2MH250T3L	Ex9C185...	Ex9R185B...
				Ex9C225...	Ex9R500B...
250	242	18	M3MS400T3L	Ex9C265...	Ex9R500B...
		25	M3MN400T3L		
		30	M3MH400T3L		
300	289	18	M3MS400T3L	Ex9C300...	Ex9R500B...
		25	M3MN400T3L		
		30	M3MH400T3L		
400	382	22	M4MS600T3L	Ex9C400...	Ex9R500B...
		30	M4MN600T3L		
		50	M4MH600T3L		
500	472	30	M4MN600T3L	Ex9C500...	Ex9R500B...
		50	M4MH600T3L		

Terms and Conditions of Sale

These general terms and conditions of sale (along with any associated written specification, quotation and/or supplemental terms and conditions provided by Seller) exclusively will govern the sale of all goods furnished to Buyer hereunder and represents the entire agreement between Buyer and Seller with respect thereto. Buyer's receipt or acceptance of delivery of any of the Products ordered or purchased hereunder will constitute its acceptance of these terms and conditions. No addition or modification to these terms and conditions will be binding on Seller unless agreed to in writing signed by an authorized representative at Seller's headquarters. Seller objects to and rejects other terms and conditions that may be proposed by Buyer or that appear on or are referenced in Buyer's purchase order or requisition that are in addition to or otherwise not consistent with the terms and conditions set forth or referenced herein.

PAYMENT TERMS

Payment terms are Net 30 days (Net thirty days) from date of invoice with ongoing approved credit as determined by Seller. No payment by offset is permitted. Interest charges will be added to overdue invoices at the rate of 1.5% per month (subject to any limit imposed by applicable law).

DELIVERY TERMS

Standard delivery terms are FOB Pomona, CA, freight prepaid and billed or as otherwise agreed to as evidenced by Seller's order acknowledgment. Acknowledged shipping dates are approximate only and based on prompt receipt of all necessary information from Buyer. International orders shall be Ex Works Shanghai. Seller disclaims all liability for late delivery.

RISK OF LOSS

Risk of loss or damage will pass to the buyer at the point of shipment

LIMITED WARRANTY

Seller warrants that new Products (excluding Ex9CDS series) furnished hereunder will be free from defects in material, workmanship and design for a period of five (5) years from the date of invoice from Seller or its appointed distributor, as the case may be. Ex9CDS series product are warranted to be free of defects in material, workmanship and design for a period of (1) year from the date of invoice from Seller or its appointed distributor as the case may be.

Remedies under the above warranties will be limited, at Seller's option, to the replacement, repair, or issuance of a credit for the purchase price, of the Products involved, and only after the return of such Products pursuant to Seller's instructions. The foregoing will be the exclusive remedies for any breach of warranty or breach of contract arising therefrom.

Warranty satisfaction is available only if (a) Seller is provided prompt written notice of the warranty claim and (b) Seller's examination discloses that any alleged defect has not been caused by misuse; neglect; improper installation, operation, maintenance, repair, alteration or modification by other than Seller; accident; or unusual deterioration or degradation of the Products or parts thereof due to physical environment or electrical or electromagnetic noise environment.

The above warranties are in lieu of all other warranties and conditions, whether expressed, implied or statutory, including implied warranties of merchantability or fitness for a particular use, or performance or application warranties, to the fullest extent permitted by applicable law.

DISCLAIMER AND LIMITATION OF LIABILITY

To the fullest extent permitted by applicable law, seller will not be liable for any business interruption or loss of profit, revenue, materials, anticipated savings, data, contract, goodwill or the like (whether direct or indirect in nature) or for any other form of incidental, indirect or consequential damages of any kind. Seller's maximum cumulative liability relative to all other claims and liabilities, including obligations under any indemnity, whether or not insured, will not exceed the cost of the product(s) giving rise to the claim or liability. Seller disclaims all liability relative to gratuitous information or assistance provided by, but not required of seller hereunder. Any action against seller must be brought within eighteen (18) months after the cause of action accrues. These disclaimers and limitations of liability will apply regardless of any other contrary provision hereof and regardless of the form of action, whether in contract, tort (including negligence and strict liability) or otherwise, and further will extend to the benefit of seller's vendors, appointed distributors and other authorized resellers as third-party beneficiaries. Each provision hereof which provides for a limitation of liability, disclaimer of warranty or condition or exclusion of damages is severable and independent of any other provision and is to be enforced as such.

FORCE MAJEURE

Seller shall not be liable for delay in performance due to fire, flood, strike or other labor difficulty, act of god, act of government authority or of the acts of the Buyer, acts of terrorism, riot, embargo, epidemic, fuel or energy storage, car shortage, wrecks or delays in transportation, or due to any other cause beyond Seller's reasonable control.

LIQUIDATED DAMAGES

Any orders that include liquidated damages are not acceptable or binding on the seller.

PRICES

Prices and other information shown in any Seller publication (including product catalogs and brochures) are subject to change without notice and to confirmation by specific quotation. Such publications are not offers to sell and are maintained only as a source of general information. Unless otherwise noted in writing, all price quotations are conditioned upon acceptance by Buyer within thirty (30) days from quotation date.

TAXES

Taxes are not included in the price of the goods. Buyer is responsible for all applicable taxes:

TARIFF

A tariff surcharge may be added to the order and will amount will be determined by the present tariff condition during the sale

MINIMUM ORDERS

\$250 minimum order. \$25 minimum order fee will be added to any orders less than \$250. Minimum order quantities also apply.

CHANGES AND SUBSTITUTIONS

Buyer-requested order changes, including those affecting the identity, scope and delivery of the Products, must be documented in writing and are subject to Seller's prior approval and adjustments in price, scheduling and other affected terms and conditions.

Any exceptions to the policy must be approved by the Director of Marketing and Sales and/or the General Manager