


H₂O COIL™

New HPD Series High Performance Hot Water Duct Coils

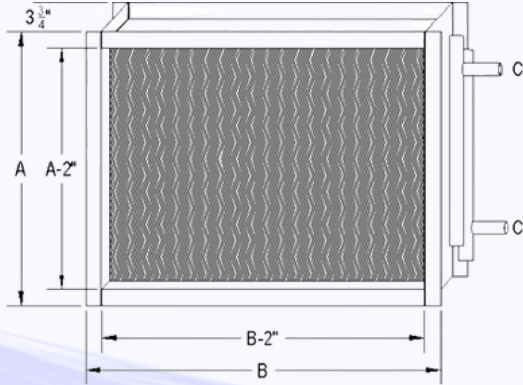

- Built to ARI 410 Certification
- Galvanized Steel 20 Ga. frame
- Aluminum Fins - .0055thickness
- Copper Tubing, 3/8" w/ .014wall
- Max 500 PSI Operating Pressure
- Max 2500 PSI Ultimate Pressure
- BTU outputs from 18,000 to 120,000
- Horizontal/Vertical Installation
- Full two year warranty
- Call for other performance criteria ratings

COMING IN
FALL 2024

Part Number	GPM	CFM	140 EWT	180 EWT	APD	Length " (A)	Width " (B)	Connection" (C)
HPD-2-1215	4	400	18,928	29,383	.09	14	18	7/8 OD
		500	21,167	32,915	.13			
		600	23,024	35,854	.17			
	WPD		1.4	1.3				
HPD-2-1218	6	700	28,740	44,580	.16	14	20	7/8 OD
		800	30,600	47,500	.20			
		900	32,250	50,100	.24			
	WPD		2.9	2.8				
HPD-2-1224	6	800	34,760	53,840	.13	14	26	7/8 OD
		1,000	38,610	59,885	.18			
		1,200	41,790	64,880	.24			
	WPD		3.27	3.1				
HPD-2-1520	7	800	35,730	55,350	.12	17	22	7/8 OD
		1,000	39,820	61,770	.17			
		1,200	43,200	67,000	.22			
	WPD		3.32	3.2				
HPD-2-1524	7	1,200	46,950	72,810	.17	17	26	7/8 OD
		1,400	50,220	77,950	.21			
		1,600	53,060	82,410	.25			
	WPD		3.54	3.4				
HPD-2-2020	8	1,200	49,250	76,450	.15	22	22	7/8 OD
		1,400	52,810	82,050	.18			
		1,600	55,900	86,900	.22			
	WPD		3.27	3.2				
HPD-2-2025	8	1,800	65,070	101,060	.19	22	27	7/8 OD
		2,000	67,910	105,525	.22			
		2,200	70,450	109,550	.25			
	WPD		3.51	3.4				

*Performance data based on 65° EAT