




New HCWH Series - Horizontal Cased Chilled / Hot Water Coils

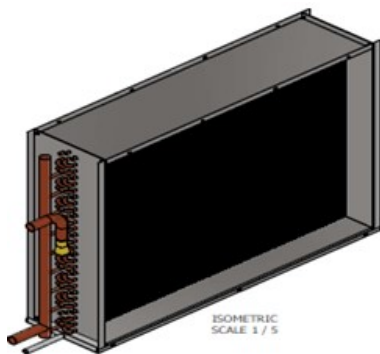

Dimensional Data

MODEL	A	B	C	D	I/O	Drain
HCWH-24	22	30	20	24	7/8	1/2
HCWH-36	22	36	20	30	7/8	1/2
HCWH-48	27	42	25	36	1 1/8	1/2
HCWH-60	27	48	25	42	1 1/8	1/2
HCWH-90	34	42	32	36	1 MPT	1/2
HCWH-120	34	54	32	48	1.5 MPT	1/2

*3/4 Supply & Return Flange

- Horizontal Airflow
- Simple Installation
- Excellent Performance
- 1/2" Copper Tube .016 WT
- 11 FPI, .006 FT
- Insulated Steel Casing
- Sloped Drain Pan
- Sweat Connections
- Coil Drain & Air Vent
- 2 Year Warranty

Chilled Water Ratings

MODEL	CFM	EAT	EWB	APD	GPM	EWT	WPD	BTU Total	BTU Sensible
HCWH-24	800	80	67	.12	7	45	2.1	25,400	19,100
HCWH-36	1200	80	67	.17	9	45	3.6	37,000	27,900
HCWH-48	1600	80	67	.14	10	45	2.0	48,700	37,200
HCWH-60	2000	80	67	.15	12	45	3.0	61,600	46,600
HCWH-90	3000	80	67	.29	15	45	2.7	92,100	71,200
HCWH-120	4000	80	67	.29	17	45	3.4	121,500	94,400

Hot Water Ratings

MODEL	CFM	EAT	APD	GPM	EWT	WPD	BTU Total
HCWH-24	800	60	.12	7	180	1.61	75,830
HCWH-36	1200	60	.17	9	180	2.46	109,290
HCWH-48	1600	60	.14	10	180	2.96	146,600
HCWH-60	2000	60	.15	12	180	4.02	181,370
HCWH-90	3000	60	.29	15	180	5.74	246,560
HCWH-120	4000	60	.29	17	180	7.22	324,810

D-VAC Sales Inc.

www.dvachvac.com TEL: (516) 256-3131 e-mail: sales@dvachvac.com