



Description:

Designed specifically for shooting, sports and high impact noise environments. Exceptionally accurate and lightning fast our digital circuitry delivers unsurpassed amplification for situational awareness and appropriate noise attenuation when you pull the trigger.

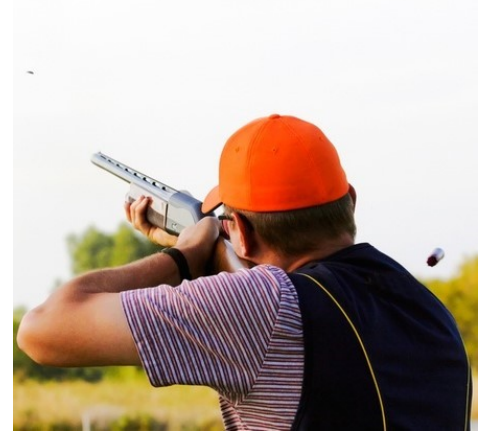

Key Features:

- Advance DSP
- Low Power warning
- 2/4 Channel Options
- Volume Control

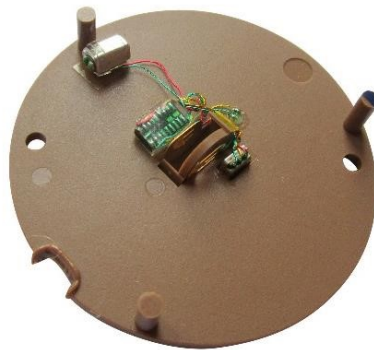

Applications:

- Game Hunting
- Clay Target
- Recreational
- High Noise env.

Options			
Channel	Telecoil	VC	Color
2	w/wo	w/wo	Black/Beige
4	w/wo	w/wo	Black/Beige

Technical Data

Peak OSPL90		87 dB
OSPL90-HFA		81 dB
Peak Gain		15 dB
HFA/FOG		10 dB
Frequency Range	F1	500 Hz
	F2	400 Hz
Distortion	@ 500Hz	3.0dB
	@ 800 Hz	2.0dB
	@ 1600Hz	1.0dB
EQ Input Noise		45dB
Battery Size		312A
Battery Drain		1.0mA
Coupling		HA1-2cc
Attack Time		5-15ms
Release Time		50-80ms

Output limited to 87 dB (A) to comply with noise at work regulations.

