



Foshan Chuangliu Electric Appliance Co., LTD

 No. 6, East and West Huangzhong Road, Jiangyi Village, Leliu Street, Shunde District, Foshan City, Guangdong Province, Building 1, Unit 401-1, 528300

 chuangliu.co@gmail.com

 chuangliucompany.com



More Than Fans, Building Business Together

Factory Direct

OEM/ODM

Global Partnership



Ms Jenny
+86 188 1874 9501



Mr Cheng
+86 188 0636 2979



Mr Joey
+86 156 8998 9313

佛山创流贸易有限公司

Foshan Chuangliu Electric Appliance Co., LTD

CATALOGUE



Reliable Quality



Factory Direct



Global Partnership



OEM / ODM

Introduce

Welcome to Foshan Chuangliu Electric Appliance Co., Ltd

At Foshan Chuangliu Electric Appliance Co., Ltd, we go beyond supplying products by delivering comprehensive business solutions that help our partners expand their markets and enhance operational efficiency.

Supported by an experienced team and advanced manufacturing capabilities, we ensure stable quality, competitive pricing, and reliable on time delivery for export orders.

Recognizing that every market has unique demands, we provide flexible OEM/ODM services and customized solutions tailored to our partners' specific needs. Built on transparency and long term commitment, we strive to be a trusted strategic partner in driving global growth and sustainable success.

10^{items}
of product patent
qualification certificates

20^{units}
of production
testing equipment

Daily production of
4000
electric fans


5000^{m²}
of processing and
production base

Floor Fan

Wall Fan



Stand Fan

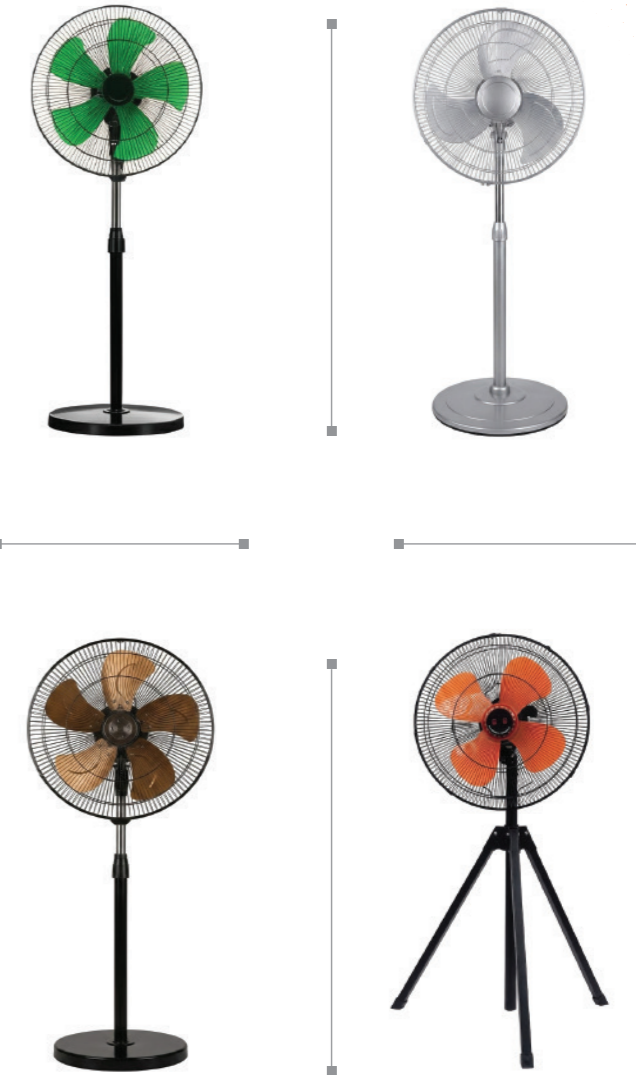

Specification

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
FY-18	450	18	110V/220V	50/60	120-150	125	1350	55
FY-20	500	20	110V/220V	50/60	130-160	125	1350	57

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
FW-18	450	18	110V/220V	50/60	120-150	125	1350	55
FW-20	500	20	110V/220V	50/60	130-160	125	1350	57

Specification

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
FM-18	450	18	110V/220V	50/60	120-150	125	1350	55
FM-20	500	20	110V/220V	50/60	130-160	125	1350	57

Feature:

- 100% pure copper wire motor with fuse, powerful with big air flow
- 3 or 5 pieces plastic (aluminum) wide fan blades (color can be customized)
- 4 speeds adjustable, plastic round base, adjustable height stand pipe
- Painted or chromed grill cage, with pull strings or switch box

Dc Rechargeable Travel Portable Battery Fan

8000mA Battery
24h Run Time



Using time

	10 inch	12 inch	16 inch
Top speed	8 Hours	7 Hours	4 Hours
Medium speed	10-13 Hours	8-10 Hours	6-8 Hours
Low speed	50 Hours	40 Hours	30 Hours

Metal Floor Fan




Specification

Model	Size		Voltage	Frequency	Power	Volume	Speed	Noise
	(MM)	(inch)	(V)	(Hz)	(W)	(m ³ /min)	(RPM)	(dB)
FA-10	250	10	110V/220V	50/60	30	23	1400	42
FA-12	300	12	110V/220V	50/60	40	36	1400	45
FA-14	350	14	110V/220V	50/60	60	70	1350	50
FA-16	400	16	110V/220V	50/60	80	88	1350	52
FA-18	450	18	110V/220V	50/60	95	95	1350	55
FA-20	500	20	110V/220V	50/60	100	100	1350	60

Feature:

- 100% pure copper wire motor
- 3 pieces aluminum wide fan blades
- Painted black or shining chromed color
- 3 speeds adjustable, Oscillation up and down

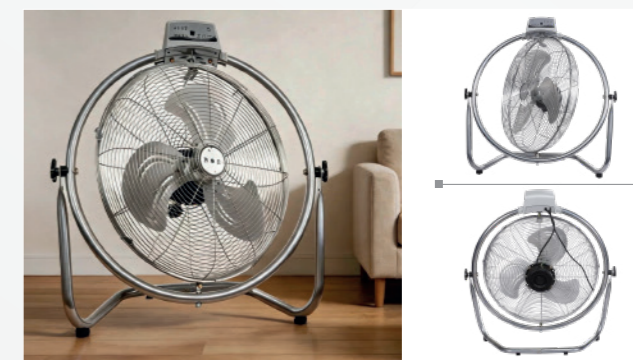

Specification

Model	Size		Voltage	Frequency	Power	Volume	Speed	Noise
	(MM)	(inch)	(V)	(Hz)	(W)	(m ³ /min)	(RPM)	(dB)
FA-12"R	300	12	110V/220V	50/60	60	70	1350	50
FA-14"R	350	14	110V/220V	50/60	80	88	1350	52
FA-16"R	400	16	110V/220V	50/60	95	95	1350	55
FA-18"R	450	18	110V/220V	50/60	100	100	1350	60
FA-20"R	500	20	110V/220V	50/60	120	120	1350	65
FA-22"R	550	22	110V/220V	50/60	130	130	1350	70

Industrial Fan / Stand Fan



MODEL NO	SIZE
FS-500A	20
FS-600A	24
FS-650A	26
FS-750A	30



MODEL NO	SIZE
FS-500B	20
FS-600B	24
FS-650B	26
FS-750B	30



MODEL NO	SIZE
FS-500E	20
FS-600E	24
FS-750E	26



MODEL NO	SIZE
FS-500F	20
FS-600F	24
FS-650F	26
FS-750F	30



MODEL NO	SIZE
FS-500C	20
FS-600C	24
FS-650C	26
FS-750C	30



MODEL NO	SIZE
FS-500D	20
FS-600D	24
FS-650D	26
FS-750D	30



MODEL NO	SIZE
FS-450G	18
FS-500G	20



MODEL NO	SIZE
FS-450H	18
FS-500H	20

Wall Fan



MODEL NO SIZE

FW-500B	20
FW-600B	24
FW-650B	26
FW-750B	30



MODEL NO SIZE

FW-500C	20
FW-600C	24
FW-650C	26
FW-750C	30



MODEL NO SIZE






FW-500D	20
FW-600D	24
FW-650D	26
FW-750D	30



MODEL NO SIZE

FW-500R	20
FW-600R	24
FW-650R	26
FW-750R	30

18inch 3 in 1

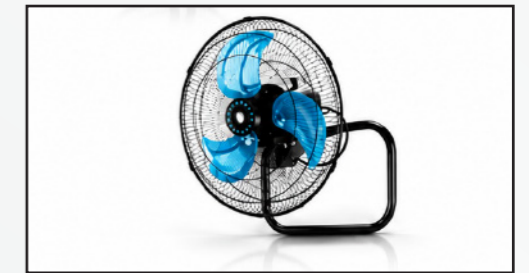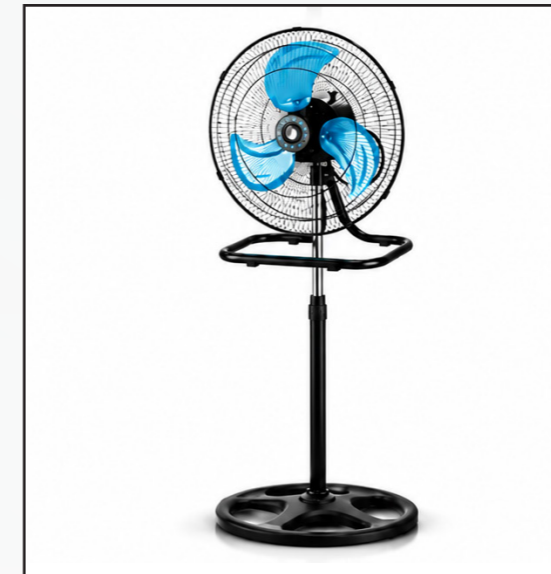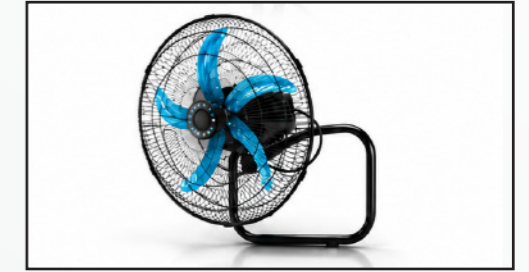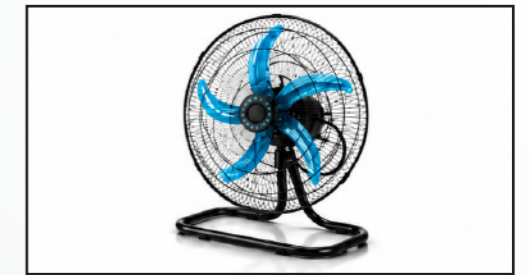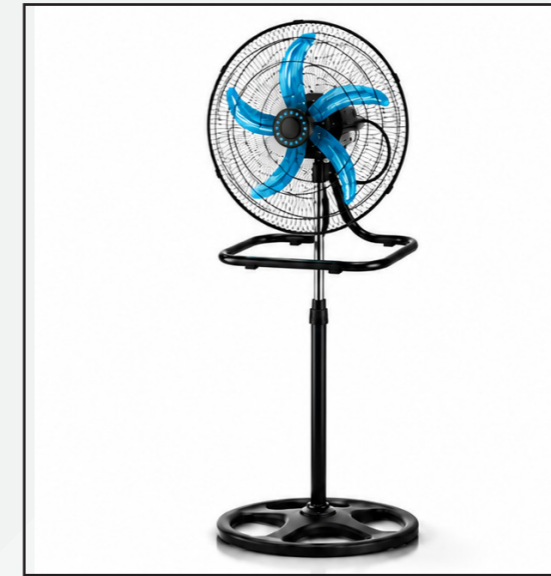

Feature:

- Copper or aluminum wire motor
- 3 pieces aluminum fan blades
- Stand fan, wall fan, floor fan 3 in 1
- 3 speeds adjustable, stable round base, adjustable height stand pipe

Specification

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m ³ /min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
FY-18	450	18	110V-120V,220V-240V	50/60	120-150	125	1350	55

Metal household fan

MODEL

FT-40M
FT-45M
FT-45M



MODEL

FS-40M
FS-45M
FS-50M



Orbit fan



MODEL NO - SIZE

FD-40(16")
FD-45(18")

MODEL NO - SIZE

FPD-150(6")
FPD-200(8")
FPD-250(10")
FPD-300(12")

MODEL NO - SIZE

FPD-150(6")
FPD-200(8")
FPD-250(10")
FPD-300(12")



MODEL

PS-40RM
PS-45RM
PS-50RM



MODEL

PS-40RM2
PS-45RM2
PS-45RM2

Mist fan



MODEL NO

FM-650W FM-650F
FM-750W FM-750E

Feature:

- 100% pure copper wire motor
- 3 pieces aluminum fan blades
- 2.0mm thickness wire grill cage with clips
- Mist consumption: 0-5L/H, mit volume adjustable
- Painted or chromed grill cage, with pull strings or switch box

Mist fan



MODEL NO

FM-650W
FM-750W

Feature:

- Water tank capacity 13L
- Strong wall mount bracket
- Available for connecting with running water pipe



26"FM-650D
30"FM-750D



26"FM-650E
30"FM-750E



26"FM-650R
30"FM-750R



26"FM-650C
30"FM-750C
Brushed Nickel



FM-650F
FM-750E



FM-650E
FM-750E



FM-400G
FM-650G

Axial Fan



Specification:

ITEM NO	SF 30	SF 40	SF 50	SF 60
Carton Size (mm)	380 × 330 × 380	480 × 330 × 480	590 × 380 × 590	660 × 480 × 660
Blade Diameter (mm)	300	400	500	600
Voltage (V)	220V-380V / 50Hz	220V-380V / 50Hz	220V-380V / 50Hz	220V-380V / 50Hz
Power (W)	250	550	750	1100
Speed (RPM)	1350			
Air Pressure (Pa)	73 ~ 42	150 ~ 98	236 ~ 106	322 ~ 208
Noise Level (dB)	<52	<60	<65	<70
Airflow (m ³ /h)	1500 ~ 3000	2500 ~ 5000	4000 ~ 8000	8000 ~ 15000

Portable Axial Flow Ventilator



Feature:

- 100% pure copper wire motor
- Metal enclosure, metal fan blades
- High speed with strong airflow
- With front and back grill, with handle easy for moving



Specification:

	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m ³ /min)	Speed (RPM)	Noise (dB)	CFM
	(MM)	(inch)							
FGM-20	200	8	110/220	50/60	120	1300	2800	140	1235
	250	10	110/220	50/60	250	2100	2800	215	1765
FGM-30	300	12	110/220	50/60	370	3000	2800	230	3235
	350	14	110/220	50/60	750	5500	2800	250	6470
FGM-40	400	16	110/220	50/60	1100	11100	2800	400	7353
	450	18	110/220	50/60	1500	12500	2800	580	8545
FGM-50	500	20	110/220	50/60	2000	13500	2800	680	9678
	600	24	110/220	50/60	2200	15000	1500	700	12450

Specification:

ITEM NO	DFG 30	DFG 40	DFG 50	DFG 60
Carton Size (mm)	370 × 270 × 370	480 × 330 × 480	570 × 280 × 570	670 × 270 × 670
Blade Diameter (mm)	300	400	500	600
Voltage (V)	220V-380V / 50Hz	220V-380V / 50Hz	220V-380V / 50Hz	220V-380V / 50Hz
Power (W)	200	500	700	1050
Speed (RPM)	1350			
Air Pressure (Pa)	73 ~ 42	150 ~ 98	236 ~ 106	322 ~ 208
Noise Level (dB)	<52	<60	<65	<70
Airflow (m ³ /h)	1000 ~ 3000	1500 ~ 4500	2500 ~ 7500	8000 ~ 14500

Drum fan



Industrial Ventilation Fan



Feature:

- Heavy-duty steel construction
- High-efficiency metal blades
- Large-volume airflow
- Low vibration and noise
- Smooth mobility design



Feature:

- High performance motor dedicated to fan
- High quality thick galvanized plate, strong corrosion resistance
- Mainly used for greenhouse, industrial workshop, livestock housing

Specification:

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m ³ /min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
HTA380	300	12	110-120.220-240	50/60	200	4600	1400	60
HTA480	400	16	110-120.220-240	50/60	250	7600	1400	61
HTA580	500	20	110-120.220-240	50/60	330	10000	1400	63
HTA680	600	24	110-120.220-240	50/60	370	12000	1400	65
HTA780	700	28	110-120.220-240	50/60	450	15000	1400	68
HTA900	800	32	110-120.220-240	50/60	370	28000	620	63
HTA1060	950	38	380	50/60	550	32500	580	63
HTA1220	1100	44	380	50/60	750	37500	520	63
HTA1380	1205	50	380	50/60	1100	44500	450	66

Octagonal exhaust fan

Feature:

- 100% pure copper wire motor
- Full metal body, metal fan blade
- Powerful airflow with low noise
- Optional for front grill




Specification

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)	Noise (dB)
	(MM)	(inch)						
FGA-12	300	12	12	50/60	130	30	1350	55
FGA-14	350	14	14	50/60	180	35	1350	60
FGA-16	400	16	16	50/60	250	65	1350	64
FGA-18	450	18	18	50/60	350	95	1350	65
FGA-24	600	24	24	50/60	700	190	1350	68

Model	Size		Voltage (V)	Frequency (Hz)	Power (W)	Volume (m³/min)	Speed (RPM)
	(MM)	(inch)					
FFA-8	200	8	220	50/60	32	9	1350
FFA-10	250	10	220	50/60	36	12	1350
FFA-12	300	12	220	50/60	42	17	1350
FFA-14	350	14	220	50/60	55	23	1350
FFA-16	400	16	220	50/60	110	48	1350
FFA-18	450	18	220	50/60	150	80	1350
FFA-20	500	20	220	50/60	180	95	1350
FFA-24	600	24	220	50/60	200	145	1350

Motor

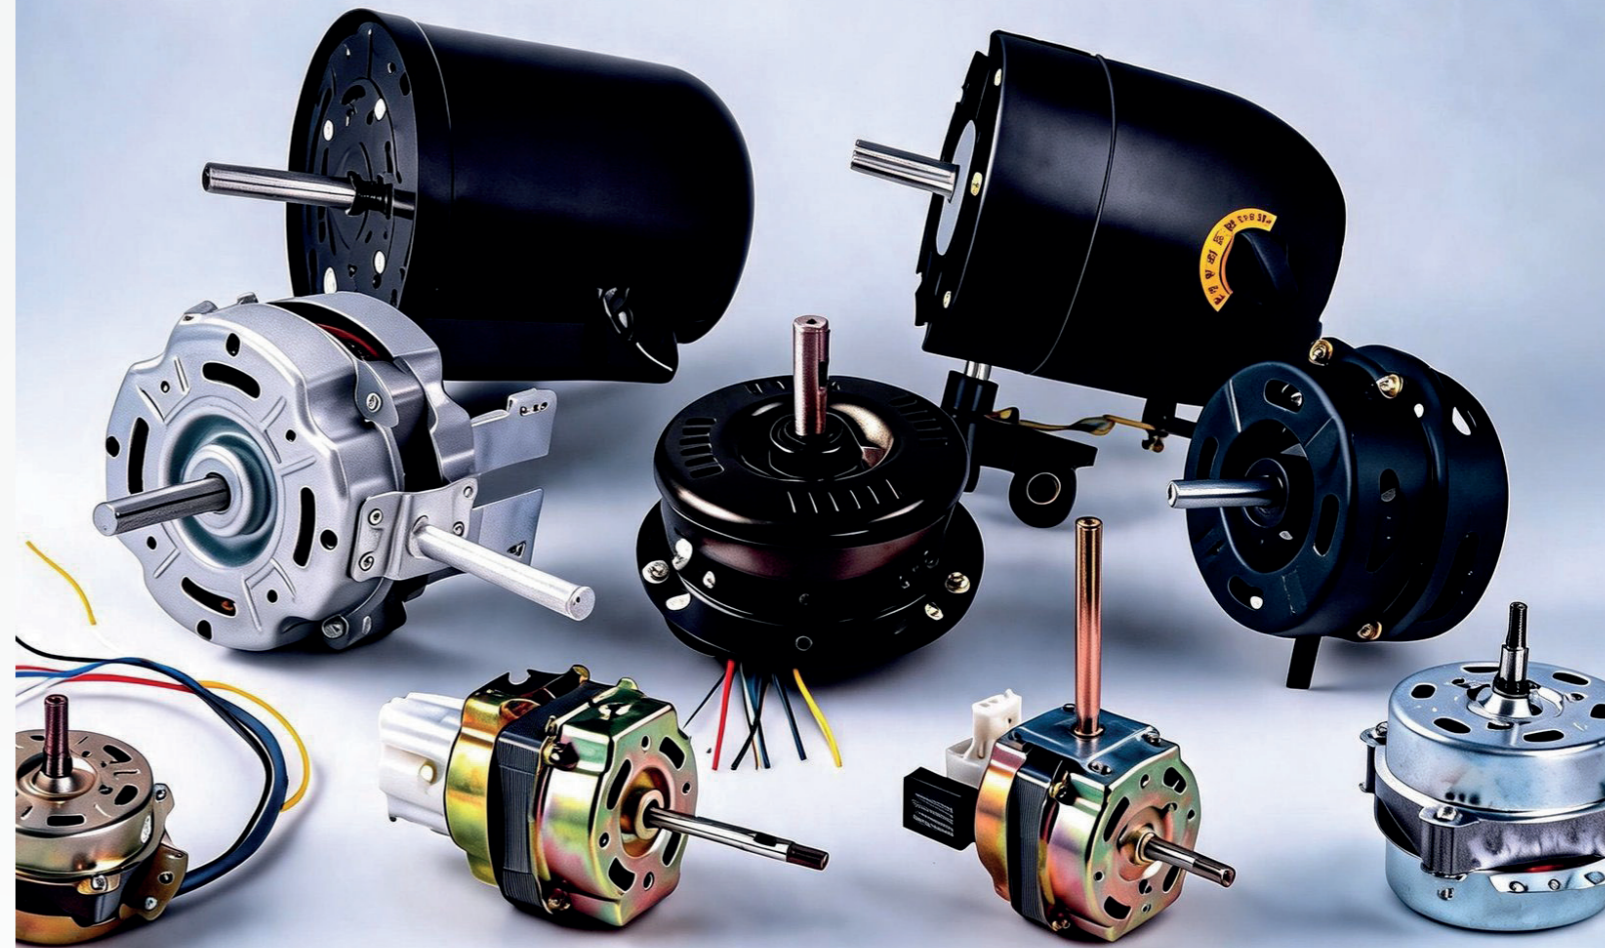

Spare Parts

pipe				
Round Base				
Cross Base				
Fan blades				
Fan blades				
Motor Accessories				
Bracket				

Plugs

			
SAA plug	Argentine three-flat plug	Brazil three pin plug	British BS plug
			
British BS plug	European 2 pin plug	Italian three-pin plug	Israeli plug
			
Japanese plug	Korean plug	Thailand plug	Large South African plug
			
UL plug	Wall plug	Switzerland three-pin plug	Small South African plug