

LMK 806

Plastic Probe for Aggressive Media

Ceramic Sensor

accuracy according to IEC 60770:
0.5 % FSO

Nominal pressure

from 0 ... 6 mH₂O up to 0 ... 200 mH₂O

Output signals

2-wire: 4 ... 20 mA
others on request

Special characteristics

- ▶ diameter 21 mm
- ▶ suitable for hydrostatic level measurement e. g. in 3/4" pipes
- ▶ good linearity
- ▶ good long term stability

Optional versions

- ▶ different cable materials
- ▶ customer specific versions
e. g. special pressure ranges

The LMK 806 with ceramic sensor and diameter of only 21 mm has been especially designed for the continuous level measurement at confined space conditions. Permissible media are highly polluted and aggressive fluids.

Basic element of the plastic submersible probe is a flush mounted ceramic sensor, which makes cleaning easier when solid parts of the medium deposit on it. Different cable and elastomer materials are available in order to achieve maximum media compatibility.

Preferred areas of use are



Sewage


waste water treatment
water recycling
dumpsites




Aggressive media


level measurement
in most of acids and lyes






SensaCo Ltd.

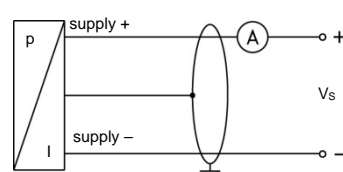Input pressure range										
Nominal pressure gauge	[bar]	0.6	1	1.6	2.5	4	6	10	16	20
Level	[mH ₂ O]	6	10	16	25	40	60	100	160	200
Overpressure	[bar]	2	2	4	4	10	10	20	40	40
Burst pressure ≥	[bar]	4	4	5	5	12	12	25	50	50
Max. ambient pressure (housing): 30 bar										
Output signal / Supply										
2-wire		4 ... 20 mA / V _S = 12 ... 32 V _{DC}								
Performance										
Accuracy ¹		≤ ± 0.5 % FSO								
Permissible load		R _{max} = [(V _S – V _{S min}) / 0.02 A] Ω								
Influence effects		supply: 0.05 % FSO / 10 V					load: 0.05 % FSO / kΩ			
Response time		≤ 10 msec								
¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)										
Thermal effects (offset and span) / Permissible temperatures										
Thermal error		≤ ± 0.4 % FSO / 10 K					in compensated range 0 ... 70 °C			
Permissible temperatures		medium / electronics / environment / storage:					-25 ... 80 °C			
Electrical protection ²										
Short-circuit protection		permanent								
Reverse polarity protection		no damage, but also no function								
Electromagnetic protection		emission and immunity according to EN 61326								
² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request										
Electrical connection										
Cable with sheath material ³		PVC	(-5 ... 70 °C)	grey	Ø 7.4 mm					
		PUR	(-25 ... 70 °C)	black	Ø 7.4 mm					
		FEP ⁴	(-25 ... 70 °C)	black	Ø 7.4 mm					
		others on request								
Cable capacitance		signal line/shield also signal line/signal line: 160 pF/m								
Cable inductance		signal line/shield also signal line/signal line: 1 µH/m								
Bending radius		static installation:		10-fold cable diameter						
		dynamic application:		20-fold cable diameter						
³ shielded cable with integrated ventilation tube for atmospheric pressure reference										
⁴ do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected										
Materials (media wetted)										
Housing		PP-HT					others on request			
Seals		FKM								
Diaphragm		ceramics Al ₂ O ₃ 96 %								
Protection cap		POM-C								
Cable sheath		PVC, PUR, FEP								
Miscellaneous										
Current consumption		max. 25 mA								
Weight		approx. 100 g (without cable)								
Ingress protection		IP 68								
CE-conformity		EMC Directive: 2014/30/EU								
Wiring diagram										
2-wire-system (current)										
										
Pin configuration										
Electrical connection		cable colours (IEC 60757)								
Supply +		WH (white)								
Supply –		BN (brown)								
Shield		GNYE (green-yellow)								



Dimensions (mm / in)

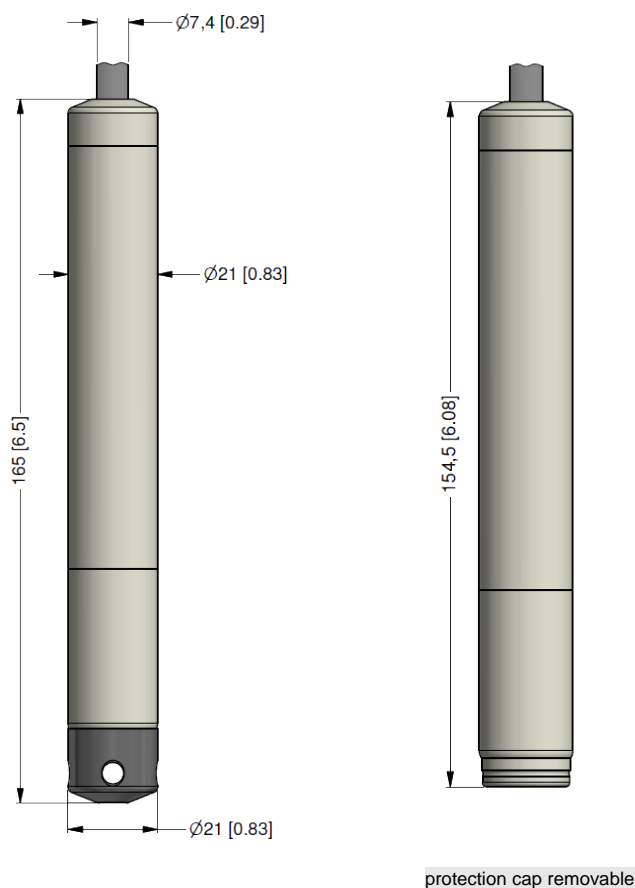

Accessories

Terminal clamp



Technical data

Suitable for	all probes with cable Ø 5.5 ... 10.5 mm	
Material of housing	standard: steel, zinc plated	optionally: stainless steel 1.4301 (304)
Material of clamping jaws and positioning clips	PA (fibre-glass reinforced)	
Dimensions (mm)	174 x 45 x 32	
Hook diameter	20 mm	
Ordering type	Ordering code	Weight
Terminal clamp, steel, zinc plated	Z100528	approx. 160 g
Terminal clamp, stainless steel 1.4301 (304)	Z100527	

LMK 806
Plastic Probe for Aggressive Media

Ordering code LMK 806

LMK 806

				-					-		-		-		-		-					-			
--	--	--	--	---	--	--	--	--	---	--	---	--	---	--	---	--	---	--	--	--	--	---	--	--	--

Pressure																			
	in bar	3	7	5															
	in mH ₂ O	3	7	6															
Input	[mH ₂ O]	[bar]																	
	6	0.60			6	0	0	0											
	10	1.0			1	0	0	1											
	16	1.6			1	6	0	1											
	25	2.5			2	5	0	1											
	40	4.0			4	0	0	1											
	60	6.0			6	0	0	1											
	100	10			1	0	0	2											
	160	16			1	6	0	2											
	200	20			2	0	0	2											
	customer				9	9	9	9											consult
Housing									R										
	PP-HT								9										consult
Diaphragm																			
	ceramics Al ₂ O ₃ 96 %								2										
	customer								9										consult
Output																			
	4 ... 20 mA / 2-wire								1										
	customer								9										consult
Seal																			
	FKM								1										
	customer								9										consult
Accuracy																			
	0.5 % FSO								5										
	customer								9										consult
Electrical connection																			
	PVC-cable (grey, Ø 7.4 mm) ¹								1										
	PUR-cable (black, Ø 7.4 mm) ¹								2										
	FEP-cable (black, Ø 7.4 mm) ¹								3										
	customer								9										consult
Cable length																			
	in m								9	9	9								
Special version																			
	standard														0	0	0		
	customer													9	9	9			consult

¹ shielded cable with integrated ventilation tube for atmospheric pressure reference