


FUEL TANKS



United International
HYDRO TECHNOLOGIES

ABOVEGROUND DIKED TANKS

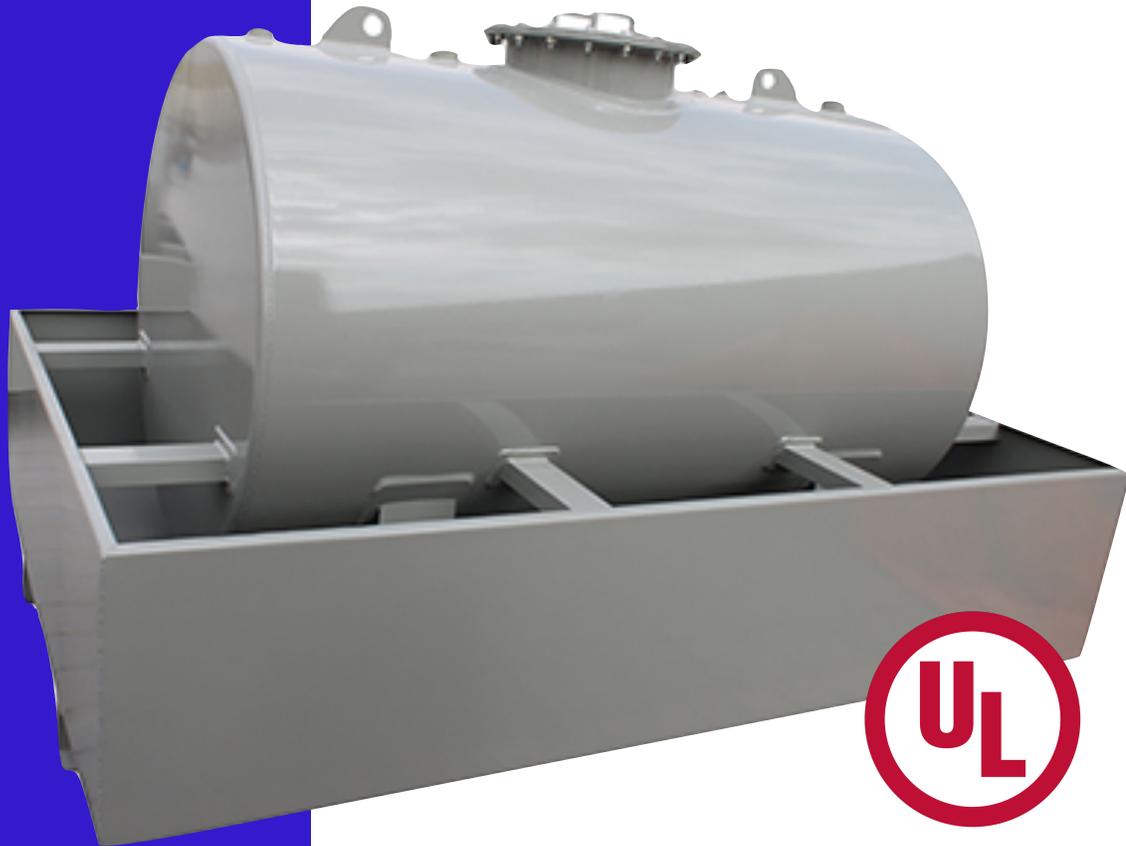

PRODUCT DETAILS

Dike tanks are a versatile aboveground secondary containment alternative. The impervious steel dike contains spills from the tank, piping and associated equipment, and it prevents their release into the environment.

The entire unit meets UL-142® and NFPA 30 specifications for primary and secondary containment. In addition to our standard • features and options, we can also supply rain shields or gabled, shed or rolled-top canopies to keep out rain, snow and debris.

Dike Tank Features

- The integral spill-containment chamber around the fill connection provides an overflow pipe to divert any spilled product into the containment dike.
- A large overflow chute ensures that any overflow will be diverted from the emergency vent directly into the dike.
- Removable rain shields minimize rain, snow and debris accumulation in the containment area while allowing for easy visual inspection and access for maintenance.

Options

For added protection, custom fit rain shields are available to keep out rain, snow and other elements. To completely cover the dike and tank, **United Engineering** manufactures the Rolled-Top Dike Canopy. Designed and engineered ladders, platforms and walkways are available to customize a dike tank to your specific needs. These options can be fitted to the inside and outside of the dike and the outside of the tank.

ABOVEGROUND DIKED TANKS INFORMATION

Volume Gallons	Tank Dimensions		Dike Dimensions		
	Diameter	Length	Length	Width	Height
240	3'-2"	3'-4"	4'-0"	5'-9"	1'-8"
300	3'-2"	4'-0"	7'-0"	4'-0"	1'-8"
500	4'-0"	5'-5"	7'-5"	6'-0"	1'-8"
1,000	4'-0"	10'-9"	12'-9"	6'-0"	2'-0"
1,000	5'-4"	6'-0"	9'-2"	8'-0"	2'-0"
1,500	5'-4"	9'-0"	13'-10"	8'-0"	2'-0"
2,000	5'-4"	12'-0"	16'-0"	8'-0"	2'-4"
2,500	5'-4"	15'-0"	17'-6"	8'-0"	2'-10"
3,000	5'-4"	18'-0"	22'-0"	8'-0"	2'-8"
4,000	5'-4"	24'-0"	28'-0"	8'-0"	2'-8"
5,000	8'-0"	13'-4"	17'-0"	10'-0"	4'-0"
6,000	8'-0"	16'-0"	20'-6"	10'-0"	4'-0"
8,000	8'-0"	21'-4"	27'-6"	10'-0"	4'-0"
10,000	8'-0"	26'-8"	35'-0"	10'-0"	4'-0"
12,000	8'-0"	32'-0"	36'-8"	12'-0"	4'-0"
15,000	10'-0"	25'-6"	31'-0"	12'-0"	6'-0"
20,000	10'-0"	34'-0"	41'-0"	12'-0"	6'-0"
25,000	10'-0"	42'-6"	51'-0"	12'-0"	6'-0"
30,000	10'-0"	51'-2"	61'-4"	12'-0"	6'-0"



United International
HYDRO ENGINEERING TECHNOLOGIES

