






Jacking and Lifting - Overview

Lifting and Jacking Points

- **WARNING:** When jacking or lifting the vehicle, block all wheels remaining on the ground. Set the parking brake if the rear wheels will remain on the ground. These actions help prevent unintended vehicle movement. Failure to follow these instructions may result in serious personal injury.
- **WARNING:** Never get underneath a vehicle that is supported only by a jack. The jack could unintentionally lower. Always support vehicle with floor stands. Failure to follow these instructions may result in serious personal injury.
- **WARNING:** Only raise the vehicle when positioned on a hard, level surface. Attempting to raise the vehicle on an uneven or soft surface may result in vehicle slipping or falling from the jack or jackstand. Failure to follow this instruction may result in serious personal injury.
- **WARNING:** Turn off (disable) the power running boards (if equipped) before jacking, lifting or placing any object under the vehicle. Never place your hand between the power running board and the vehicle. Extended power running boards will retract when doors are closed. Failure to follow these instructions may result in serious personal injury.


NOTE: Crew Cab pickup 4WD shown, others similar.

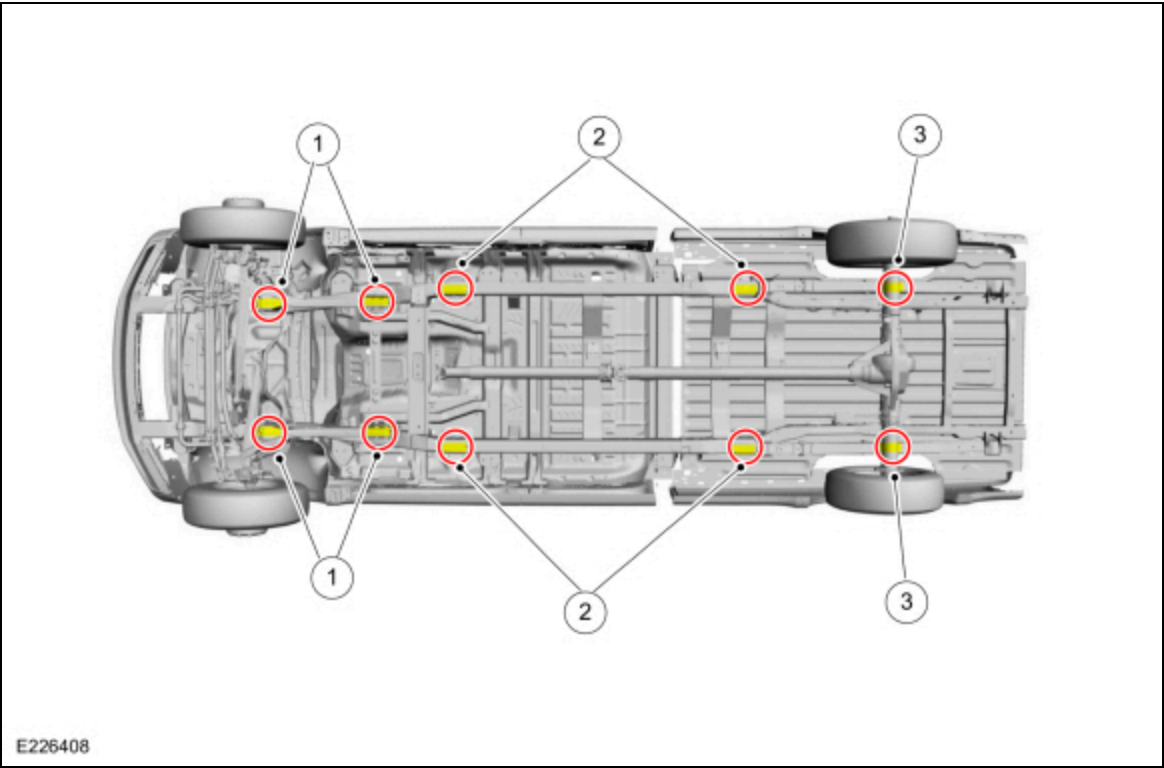

Item	Description
1	Radius arm lifting points
2	Frame lifting points
3	Rear axle lifting points

Lifting and Jacking Points – Front

Use the following illustrations to determine the recommended lifting points for the vehicle being lifted. The lifting points will vary depending on the type of hoist being used and the vehicle configuration.

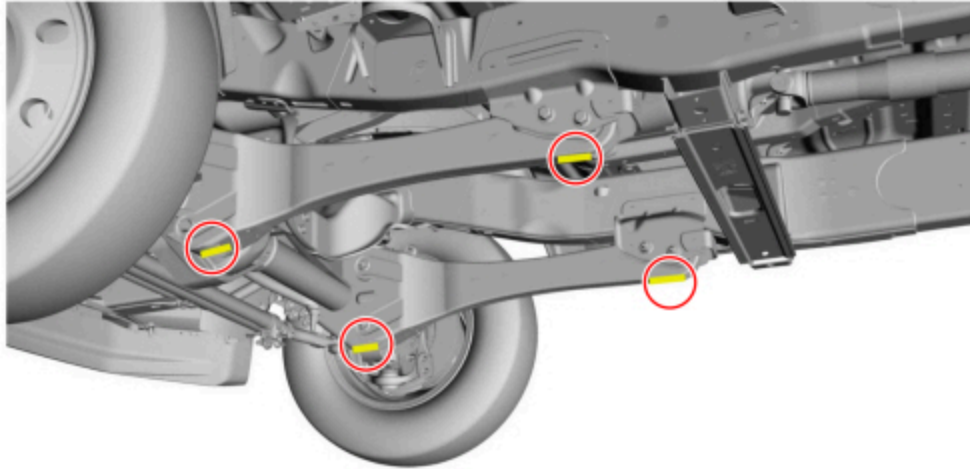

E226406

NOTICE: When raising a vehicle on a hoist, use care when positioning the hoist adapters prior to lifting the vehicle so that hoist arms do not interfere with the surrounding suspension or steering linkage components.


NOTICE: Jacking the vehicle is intended to be used in an emergency for changing a deflated tire. To avoid damage to the vehicle, never use a jack to hoist the vehicle for any other purpose.

Only the specified jacking points may be used for jacking and supporting the vehicle

Lifting and Jacking Points – Rear

NOTICE: Do not use the differential housing as a lift point. Leaks or damage to the rear axle cover and adjoining differential housing surface may occur if a floor jack or any lifting device is allowed to contact the cover at any point where the cover joins the housing.

NOTICE: Position lift arms or floor jack on flats of rear spring brackets to avoid damage to rear axle.

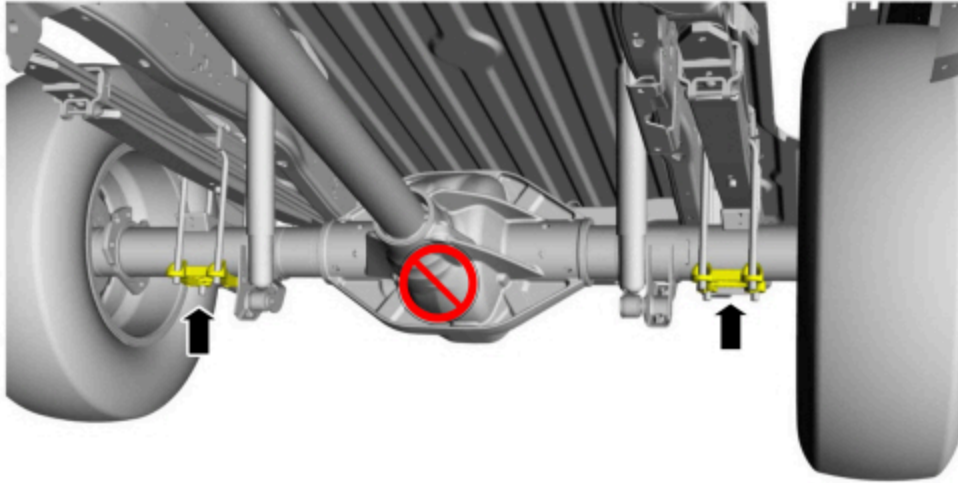

E226407

© Copyright 2024, Ford Motor Company.