




2GIG-DW10-345 or 2GIG-DW10e-345
Thin Door/Window Sensor

Battery Installation & Replacement

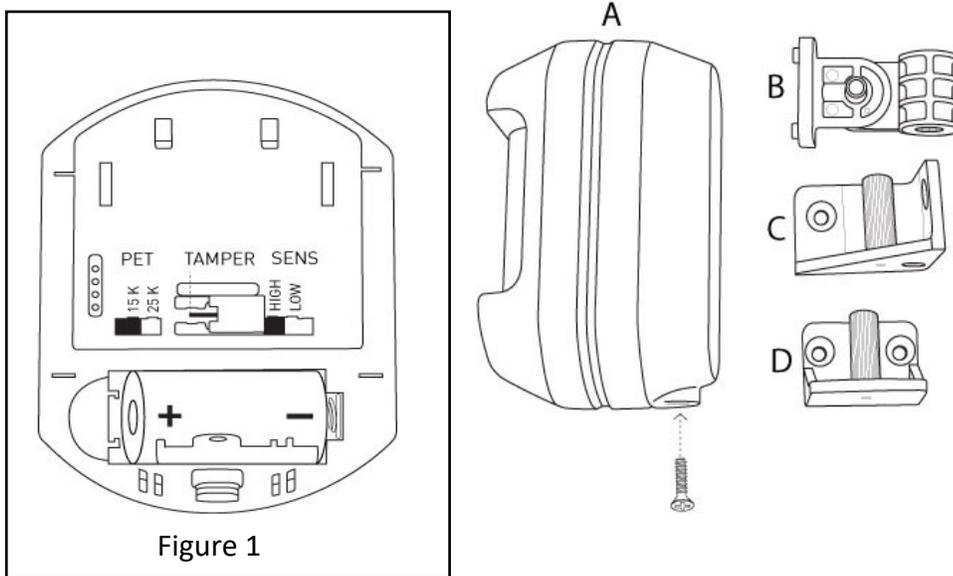

Remove back cover by unscrewing bottom screw and pull back cover from bottom to top. Install One (1) Panasonic CR123A, 3 VDC, 1550 mAh or equivalent lithium cylindrical battery Use only the recommended replacement batteries (see Specifications). Be sure to observe the polarity.

WARNING! The polarity of the battery must be observed, as shown (see Figure 1). Improper handling of lithium batteries may result in heat generation, explosion or fire, which may lead to personal injuries. Replace only with the same or equivalent type of battery as recommended by the manufacturer. (see Specifications)

Batteries must not be recharged, disassembled or disposed of in fire. Disposal of used batteries must be made in accordance with the waste recovery and recycling regulations in your area.

Keep away from small children. If batteries are swallowed, promptly see a doctor.