

ARTICULATED BOOM LIFTS

A46JRT

DIMENSIONS

	A46JRT
Max. working height	52 ft 11 in
Max. platform height	46 ft 11 in
Max. horizontal reach	24 ft 11 in
Clearance height at max. outreach	25 ft 2 in
Platform size	39 in x 72 in
Chassis width (A)	6 ft 10 in
Overall length (B)	18 ft 8 in
Stowed height (C)	7 ft 2 in
Ground clearance	13 in

PERFORMANCE

Platform capacity (SWL)	500 lbs
Max. wind speed	28 mph
Max. drive height	46 ft 11 in
Max. drive speed (stowed)	4.0 mph
Max. drive speed (elevated)	0.8 mph
Jib length	5 ft
Jib arc	140°
Platform rotation	160°
Superstructure rotation	360° non-continuous
Tailswing	0 in
Raise/lower time	101/98 sec
Gradeability	45%
Inside turning radius	2 ft 8 in
Outside turning radius	10 ft 5 in
Tires	foam filled lug 355/55D625
Controls	proportional
Drive system	4-wheel drive


POWER

Power source	Kubota V1505 24.9hp diesel Tier 4 Final
--------------	--

WEIGHT


Weight	16,620 lbs
--------	------------

WORKING ENVELOPE

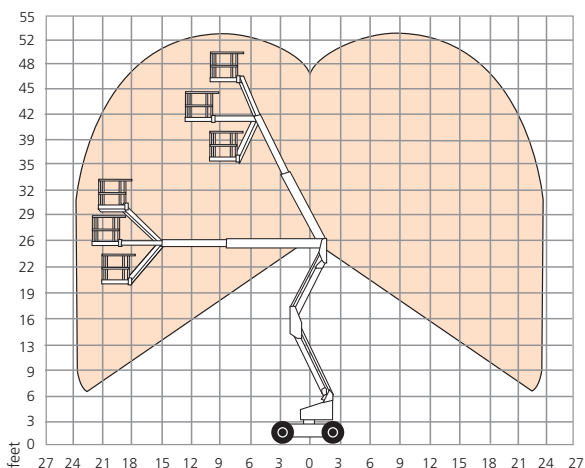

ANSI Specification
©Snorkel 2021

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate Snorkel operators manual for detailed instructions on the proper use and maintenance.

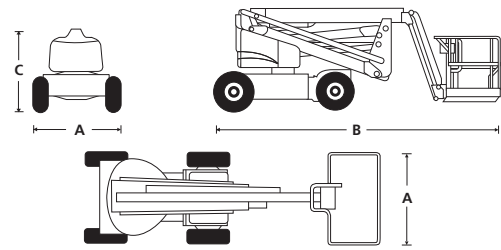

STANDARD FEATURES

- Snorkel Guard™ secondary guarding system
- Multi-function proportional controls
- Zero tailswing
- Oscillating front axle
- Tri-entry platform
- Foam filled lug tires
- Power line to platform
- Hour meter & on-board diagnostics display
- Tilt alarm
- Horn
- Drive motion alarm
- Flashing amber light
- Platform overload system
- ANSI compliant

snorkel www.snorkellifts.com

P.O. Box 1160
St. Joseph, MO 64502-1160, USA
Tel: 1 (785) 989-3000
Toll-free: 1 (800) 255-0317
Fax: 1 (785) 989-3070
Email: sales.usa@snorkellifts.com