




96-03 ZX7R
KAWASAKI Undertail
Installation instructions




Installation Instructions

- 1) Carefully remove the tail section and mud flap.
- 2) Save all bolts, washers and plastic rivets for re-installation of tail. Disconnect brake lights, license plate and turn signals.

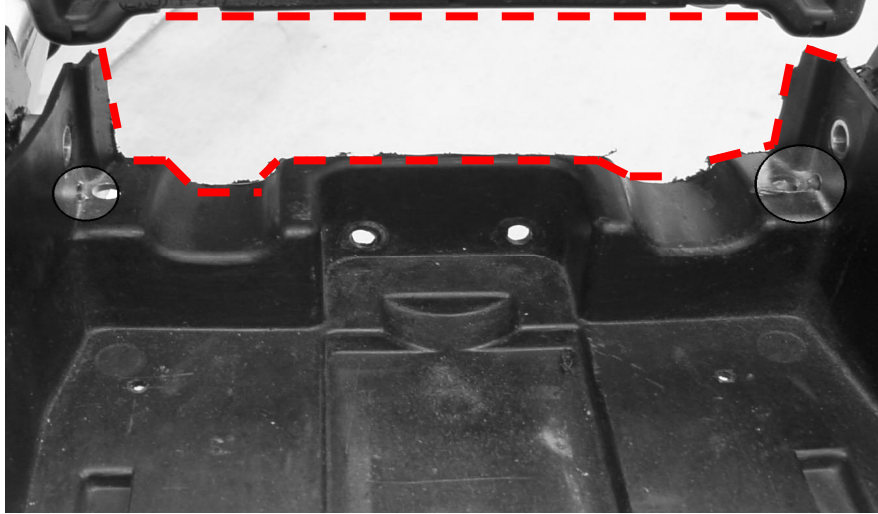

3) Using a “Dremel” tool or hand saw, remove the plastic shown in the photos.

4) Re-drill the back 2 mounting positions for the glove box, and re-install Bolts

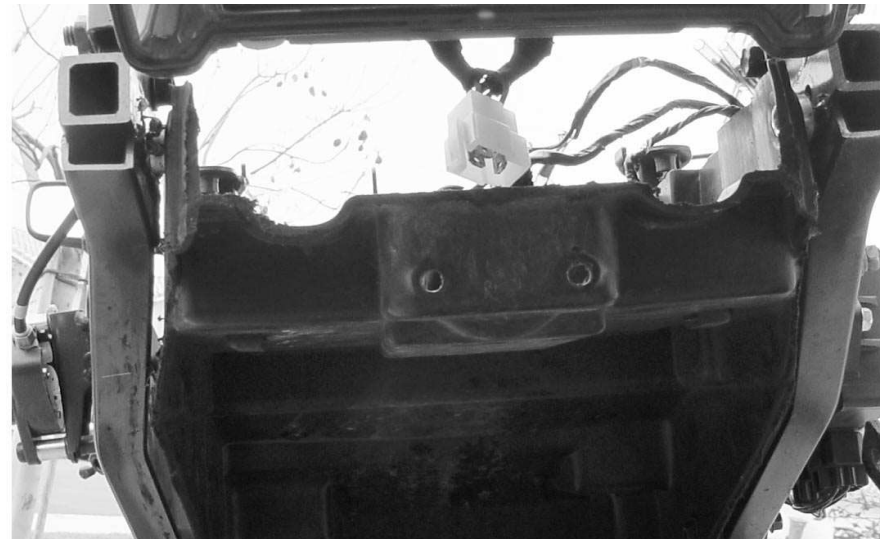



- 5) Install license plate bracket. Now hold license plate in desired location on undertail (under the signals), carefully mark and drill holes, install using the bolts & nuts provided.

- 6) Place undertail in the tail section while off the bike, mark the 4 mounting holes from the undertail onto the tail section, drill holes to accommodate the 4 well nuts included with the kit.

- 7) Re-install all body work leaving all fasteners loose. Now insert undertail into place, right side first, then left, then using the 4 well nuts insert into body work and undertail; tighten, adjust undertail if necessary and re-tighten all stock fasteners.



You are done!

