



954 HONDA 2002-03

INSTALLATION INSTRUCTIONS

Please read the installation instructions before you start the installation process.

The installation is not difficult but timing consuming specially when it comes to cutting the flap.

Please look for professional help if you don't feel qualified for the task.



954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

BEFORE INSTALLING THE UNDERTAIL PLEASE REMOVE THE FOLLOWING:

- Tail section (bolts, plastic rivets and washers)
- Disconnect and remove brake light
- License plate
- Turn signals
- Key lock with clip





954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

CUTTING:

Make sure all wiring is moved out of the cutting area.

Proceed to remove the 2 bolts inside the glove box at the rear end of the stock fender.

Once you do that, the end will hang out for cutting.



954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

CUTTING:

With a dremmel or hand saw, remove the area shown in the pictures.

Follow the white lines marked.






954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

CUTTING:

Take your time so you don't cut more than necessary!!

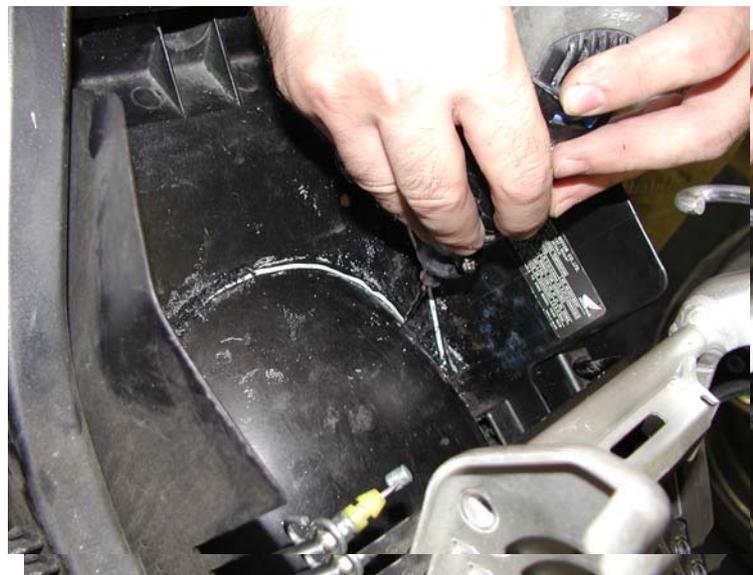



954 2002-03 HONDA INSTALLATION INSTRUCTIONS

CUTTING:





954 2002-03 HONDA INSTALLATION INSTRUCTIONS

CUTTING:





954 2002-03 HONDA INSTALLATION INSTRUCTIONS

CUTTING:






954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

Area removed will look like this



Additional area to be removed.

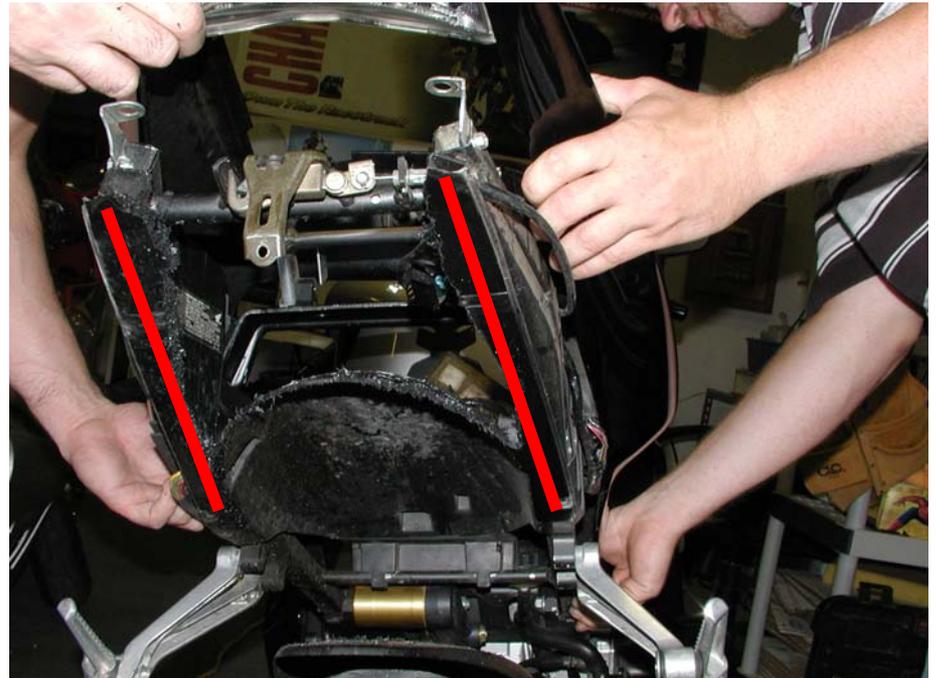



954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

INSTALLING THE UNDERTAIL:

**First, install the tail section, the
light and then install the undertail .**

**To hold it in place please use the
stock plastic screw rivets that
came with your bike.**





954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

INSTALLING THE UNDERTAIL:

**Tighten everything, then install
the seat.**

**Continue with the led built in
blinkers.**

**Splice your bike's turn signal
wires to the ones on the
blinkers.**

**On the undertail, the red wires
are the power wires and the
black ones the ground.**





954 2002-03 HONDA

INSTALLATION INSTRUCTIONS

INSTALLING THE BRACKET:

First, mark the spot where you will be installing the bracket. Drill holes and then secure using the bolts & nuts provided.





954 2002-03 HONDA INSTALLATION INSTRUCTIONS



**YOU ARE
DONE!**

