

2004 GSXR UNDERTAIL INSTALLATION INSTRUCTIONS



**Remove the tail section:
bolts, plastic pins, seat etc.**





**Remove the tail section:
bolts, plastic pins, seat etc.**






Tail section removed



Using a hand saw or dremmel cut the stock undertail

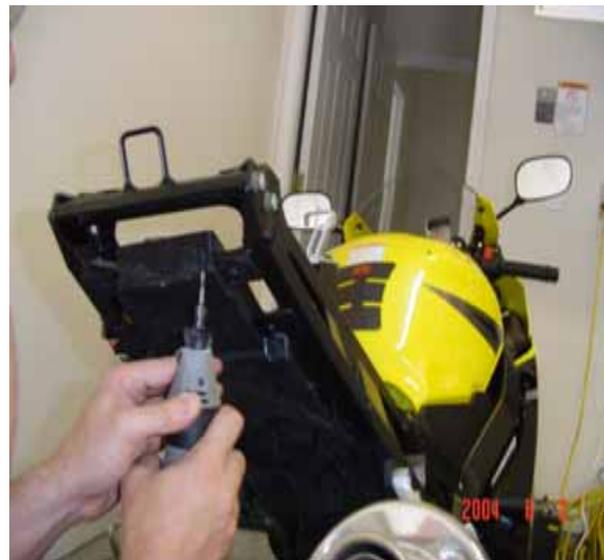



**Smooth the edges for better finish
(with Dremmel or sander).**

Final result.



Should look like this



Wire connection shown. Do it before the installation of the undertail






Place back the tail section.
Leave it loose. **Do not bolt it in yet** until after you install the undertail (for easy handling)



Slide it up from bottom to top.



Start pushing the plastic pins in

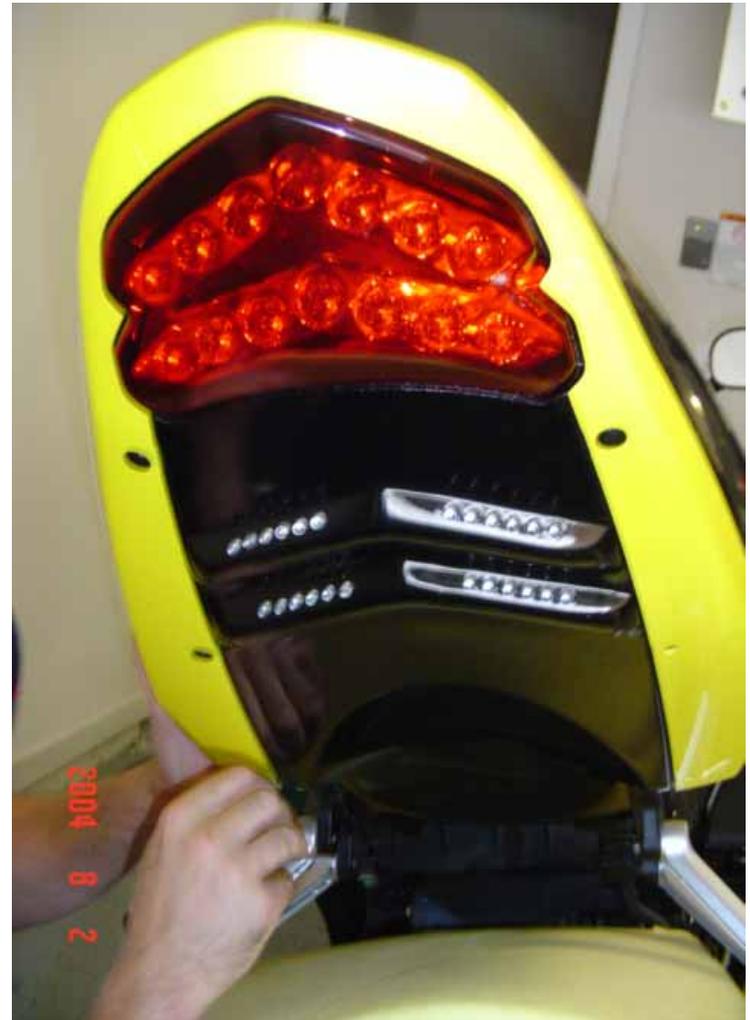



Should look like this




Bolt everything in. See that you kept ALL your trunk space.





Bolt in the seat.

Make sure the lights & blinkers are working fine.

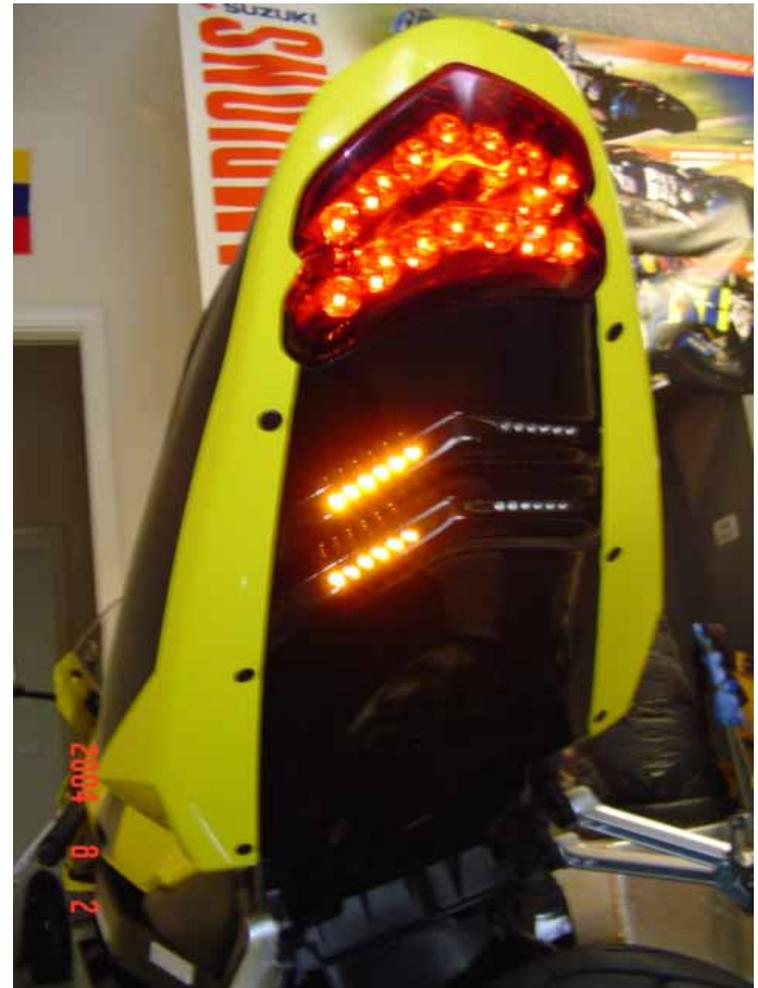

You are done!

