

Double Rack with Options – Installation & Use Guide

Accessory Panel Installation:

1. Remove lower carpet.
2. Insert the two fasteners through the accessory panel as shown in Pic 1.
3. Secure the panel in place.
4. For best fit of the flashlight, I prefer to thread the straps through slots 3 and 5 from the bottom
5. The flashlight includes a plastic safety cap under the on/off button, remove the cap before use.

Tools Required:

- 2mm Allen wrench
- 5.5mm or 7/32" wrench

Installing the Privacy Panel:

Note: Just like rowing the gears, there is a knack to smooth operation of your Privacy Panel. QR code link to video provided.

1. Place the top edge of the panel into the groove between the front trim and press nuts (see Pics 2 & 3).
2. While pressing down on the bottom trim, slide the panel into place behind the tabs on the lower trim (see Pics2& 3).

Removing the Privacy Panel:

1. Push down on the bottom trim while lifting the panel and top shelf upward.
2. Swing the bottom of the panel toward you to release and remove.

Fastener Specs:

Component	Size	Tool
Trim & Accessory Panel	3mm x 0.5mm	2mm Allen 2.5mm Allen &
Chassis	4mm x 0.7mm	7mm wrench


***Disclaimer:**

Dogwood Racing, its owners, and managers are not responsible for any damage or costs resulting from improper installation or use.

Pic 1



Pic 2

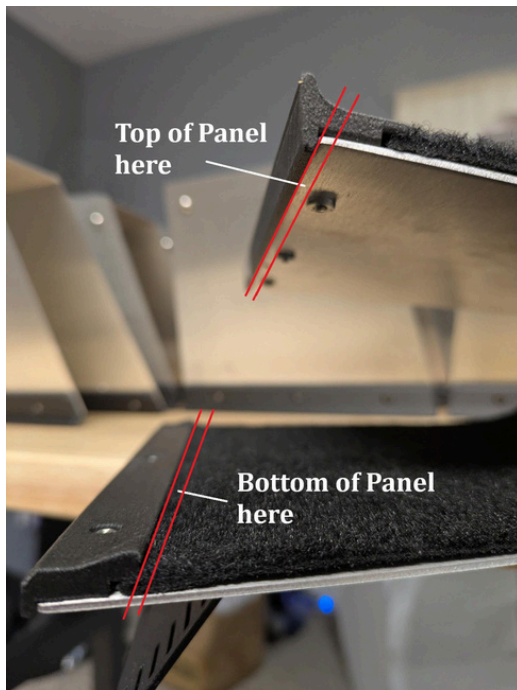

Pic 3



Scan the QR code for Video Example



Shop - Follow us - Like - Subscribe

www.dogwoodracing.com

Etsy



TikTok

You Tube



Instagram

Thank you for your purchase & supporting small business