



# **Double Rack with Options – Installation & Use Guide**

## **Accessory Panel Setup:**

- The Accessory Panel ships with the flashlight pre-installed
- While unstepping, note the placement of the soft straps in grooves 3 and 5 from the bottom. This height provides the best position for flashlight or like items.
- The flashlight includes a plastic safety cap under the on/off button. Remove cap before use.
- Set the flashlight and straps aside until installation is complete.

### **Tools Required**

- 2mm Allen wrench
- 5.5mm or 7/32" wrench

## Steps:

- 1 Remove the lower carpet.
- 2 Insert the two fasteners through the Accessory Panel as shown in Pic 1.
- 3 Secure the panel in place.

# **Installing the Privacy Panel:**

Note: Just like rowing the gears, there is a knack to smooth operation of your Privacy Panel. QR code link to video provided.

- 1 Place the top edge of the panel into the groove between the front trim and press nuts (see Pics 2 & 3).
- While pressing down on the bottom trim, slide the panel into place behind the tabs on the lower trim (see Pics2& 3).

# **Removing the Privacy Panel:**

- 1 Push down on the bottom trim while lifting the panel and top shelf upward.
- 2 Swing the bottom of the panel toward you to release and remove.

# Fastener Specs:


Component	Size	Tool
Trim & Accessory Panel	3mm x 0.5mm	2mm Allen
Chassis	4mm x 0.7mm	2.5mm Allen & 7mm wrench

#### \*Disclaimer:

# Pic 1



Pic 2 Pic 3

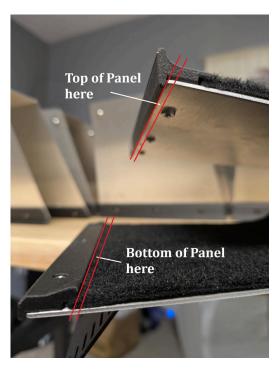



Scan the QR code for Video Example





Shop - Follow us - Like - Subscribe

www.dogwoodracing.com Etsy TikTok You Tube









Thank you for your purchase & supporting small business