




PUMP

Stainless steel/Plastic pump body
Support: cast iron/Aluminum die casting
Stainless steel impeller
Max.liquid temperature: 40 °C
Max.Suction: +9m

Motor

Motor with copper winding
Shaft: Stainless steel welded Shaft /45# steel shaft
Insulation class: B or F
Protection class: IPX4
Environment temperature: +40°C
Cooling: External ventilation

Performance Chart At N=2850rpm

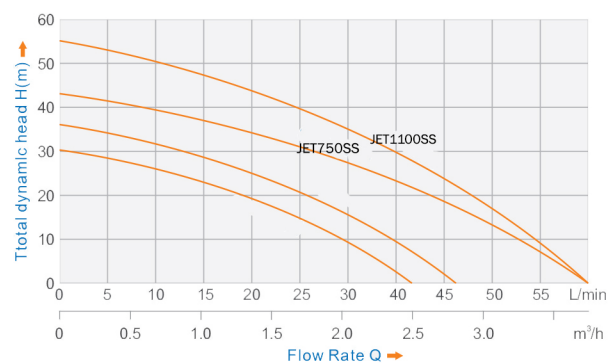

Pump Installation And Applications

It can be used to transfer clean water or other liquids similar to water in physical and chemical properties. It is suitable for small living water supply, automatic water sprinkler system, small air conditioner system and supporting equipment etc.

MODEL	POWER		MAX.FLOW (L/min)	MAX.HEAD (m)	MAX.SUCT (m)	INLET/OUTLET (m)	GW (Kg)	PACKING DIMENSION (mm)
	KW	HP						
JET750SS	0.75	1.0	60	43	9	1"x1"	9	396x215x255
JET1100SS	1.1	1.5	60	55	9	1"x1"	10	410x215x255

MADE IN ITALY

