



富来克上下集散 (Fleck top & bottom distributor)



N0801 (3/4")
N0802 (1")



N0801-A (3/4")
N0807-A (1")



型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N0801	3/4"富来克上集散 (Fleck top distributor)	6"~12" (150~300mm)
N0801-A	3/4"富来克下集散 (Fleck bottom distributor)	6"~12" (150~300mm)
N0802	1"富来克上集散 (Fleck top distributor)	6"~12" (150~300mm)
N0807-A	1"富来克下集散 (Fleck bottom distributor)	6"~12" (150~300mm)

3/4"上下集散 (3/4"top & bottom distributor)







注: 与2.5"黑三通(中心管为3/4") 配套适用
Remarks: these two items are combined with N9901, N9903 and N9904 as a set

1"上下集散 (1"top & bottom distributor)





注: 与2.5"黑三通(中心管为1") 配套适用
Remarks: these two items are combined with N9902 as a set

型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N0803	3/4"上集散 (3/4"top distributor)	6"~12" (150~300mm)
N0803-C	3/4"下集散 (3/4"bottom distributor)	6"~12" (150~300mm)
N0804	1"上集散 (1"top distributor)	6"~16" (150~400mm)
N0804-C	1"下集散 (1"bottom distributor)	6"~16" (150~400mm)
N2806-C	3/4"串联下散 (3/4"double bottom distributor)	10"~16" (250~400mm)
N2807-C	1"串联下散 (1"double bottom distributor)	10"~16" (250~400mm)




型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
X2810-A	6分卡扣上集散 (3/4"top distributor)	6"~12" (150~300mm)
X2811	6分香菇头下集散 (3/4"bottom distributor)	6"~12" (150~300mm)
X2812-A	1寸卡扣上集散 (1"top distributor)	8"~16" (200~400mm)
X2813	1寸香菇头下集散 (1"bottom distributor)	8"~16" (200~400mm)

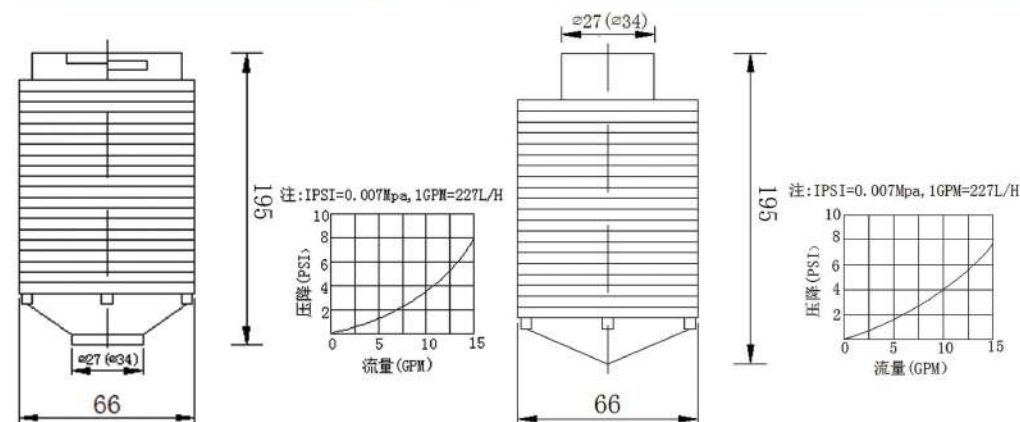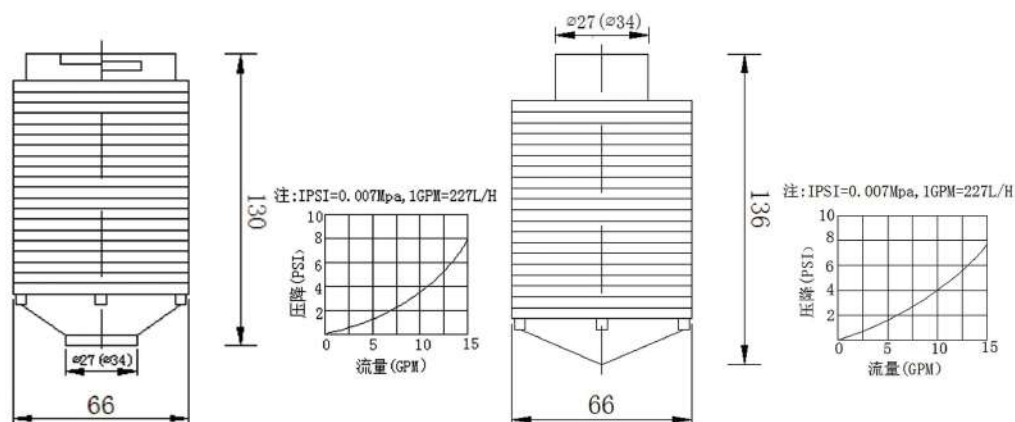

型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
X2810-C	6分加长香菇头上集散 (3/4"top distributor)	6"~16" (150~400mm)
X2811-C	6分加长香菇头下集散 (3/4"bottom distributor)	6"~16" (150~400mm)
X2812-C	1寸加长香菇头上集散 (1"top distributor)	8"~20" (200~500mm)
X2813-C	1寸加长香菇头下集散 (1"bottom distributor)	8"~20" (200~500mm)

型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
X2814-C	6分超长香菇头上集散 (3/4"top distributor)	6"~16" (150~400mm)
X2815-C	6分超长香菇头下集散 (3/4"bottom distributor)	6"~16" (150~400mm)
X2816-C	1寸超长香菇头上集散 (1"top distributor)	8"~20" (200~500mm)
X2817-C	1寸超长香菇头下集散 (1"bottom distributor)	8"~20" (200~500mm)


配Fleck 上布水器 (Top stack screen for Fleck valve)

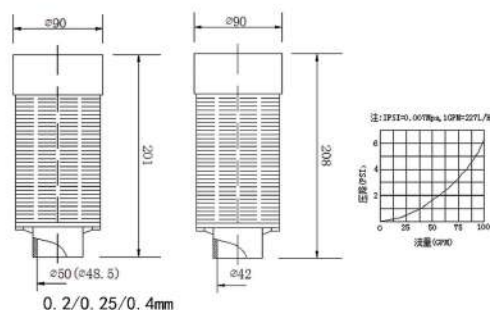

注: N182A-1/2 无不锈钢螺钉 Remark: Without stainless screw for N182A-1/2

型号 (Item No)	名称 (Discription)	支管间隙 (Slot size)	适用罐体Diameter (Inches/mm)
N180A-1/4	180汉堡头 (180 top stack screen)	0.2/0.25/0.4mm	12"~36" (300~900mm)
N182A-1/2	182汉堡头 (182 top stack screen)	0.2/0.25/0.4mm	12"~36" (300~900mm)


配润新上布水器 (Top stack screen for runxin valve)

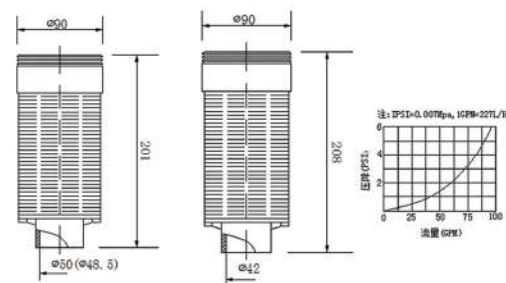

注: N182B-1/2 无不锈钢螺钉 Remark: Without stainless screw for N182B-1/2


型号 (Item No)	名称 (Discription)	支管间隙 (Slot size)	适用罐体Diameter (Inches/mm)
N180B-1/4	180汉堡头 (180 top stack screen)	0.2/0.25/0.4mm	12"~36" (300~900mm)
N182B-1/2	182汉堡头 (182 top stack screen)	0.2/0.25/0.4mm	12"~36" (300~900mm)

配Fleck 3150上布水器 (Top stack screen for Fleck 3150 valve)

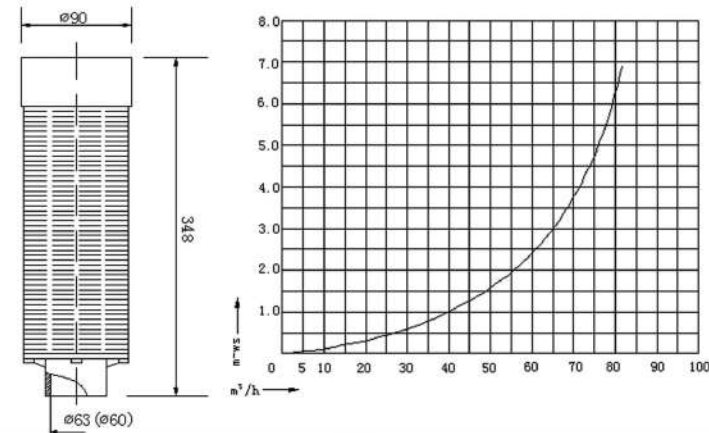



型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N182A-2-C	加长上集散 (top stack screen)	30"~60" (750~1500mm)

配润新上布水器 (Top stack screen for runxin valve)


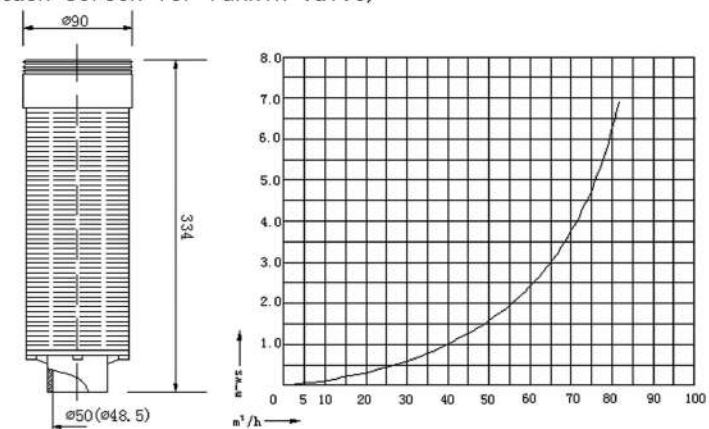


型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N182B-1/2-C	加长上集散 (top stack screen)	30"~60" (750~1500mm)
N182B-2-C (63mm)	加长上集散 (top stack screen)	30"~60" (750~1500mm)





注: 最大反洗流量 22T/H (100GPM), 压降为 6PSI (0.042Mpa)
Remark: The maximum backwash flow is 22T/H (100GPM), PSI drop is 6PSI (0.042Mpa)




型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N180C-1/4	180汉堡头 (180 bottom stack screen)	12"~36" (300~900mm)
N182C-1/2	182汉堡头 (182 bottom stack screen)	12"~36" (300~900mm)

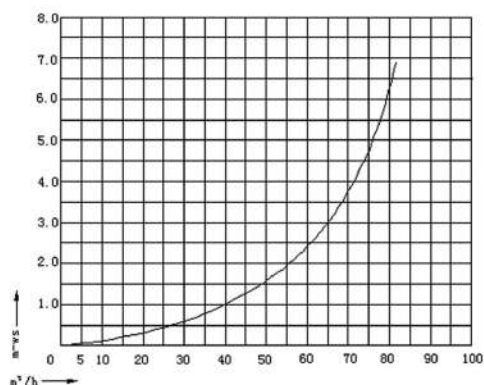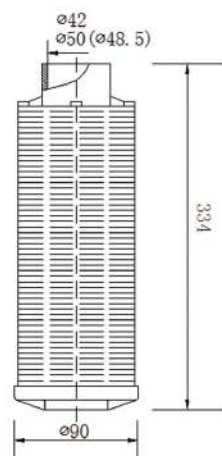


型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N180C-1/4-C	180下集散 (180 bottom stack screen)	24"~40" (600~1000mm)
N182C-1/2-C	182下集散 (182 bottom stack screen)	24"~40" (600~1000mm)

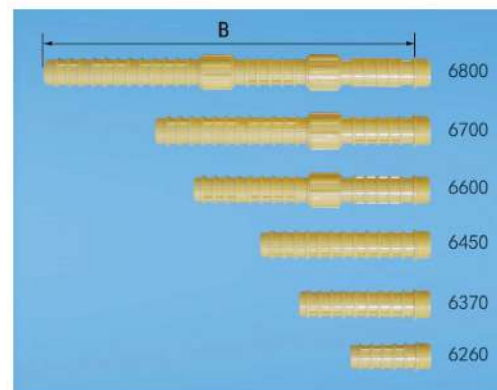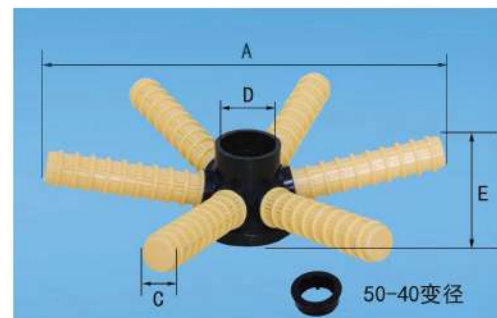


ES6260A1



ES6370A1






ES6450A1





ES6600A1
ES6700A1

型号 (Item NO)	Dimensions (mm)					支管间隙 Slot size	适用罐体Diameter (Inches/mm)	罐体上开口 (Top opening)
	A	B	C	D	E			
ES6260A1	250	84	35	48.5/50/42	71	0.2/0.25mm	12"~16" (300~400mm)	4"~8" THREAD
ES6370A1	360	138	35	48.5/50/42	83	0.2/0.25mm	18"~21" (450~550mm)	4"~8" THREAD
ES6450A1	440	182	35	48.5/50/42	95	0.2/0.25mm	24" (600mm)	4"~8" THREAD
ES6600A1	610	263	35	48.5/50/42	105	0.2/0.25mm	30" (750mm)	4"~8" THREAD
ES6700A1	690	310	35	48.5/50/42	114	0.2/0.25mm	36"~42" (900~1000mm)	4"~8" THREAD
ES6800A1	930	433	35	48.5/50/42	133	0.2/0.25mm	48" (1200mm)	4"~8" THREAD

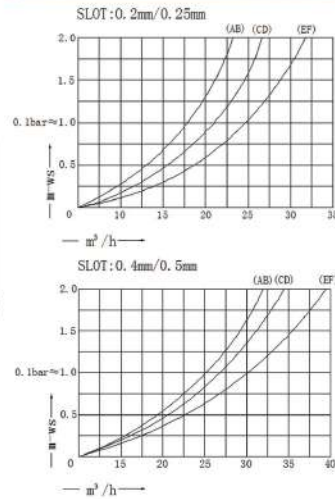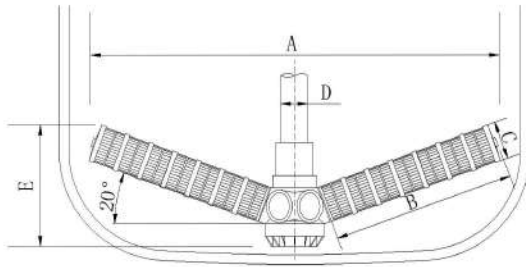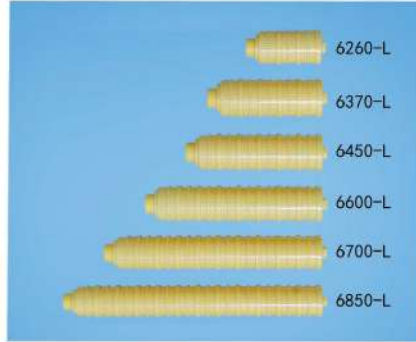

型号 (Item No)	Dimensions (mm)					支管间隙 Slot size	适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	E				
ES6260B2	296	116	53	48.5/50	110	0.2/0.25/0.5mm	13"~16" (350~400mm)	A	4"~8" THREAD
ES6370B2	416	178	53	48.5/50	125	0.2/0.25/0.5mm	18"~20" (450~500mm)	B	4"~8" THREAD
ES6450B2	455	210	53	48.5/50	135	0.2/0.25/0.5mm	24" (600mm)	C	4"~8" THREAD
ES6600B2	575	275	53	48.5/50/63	165	0.2/0.25/0.5mm	30" (750mm)	D	4"~8" THREAD
ES6700B2	710	337	53	48.5/50/63	175	0.2/0.25/0.5mm	36"~40" (900~1000mm)	E	4"~8" THREAD
ES6850B2	835	402	53	48.5/50/63	185	0.2/0.25/0.5mm	48" (1200mm)	F	4"~8" THREAD


注: B1系列支管采用卡扣式, B2系列支管采用螺纹式。
Remark: The laterals of B1 series adopt quick lock, and B2 series adopt thread.

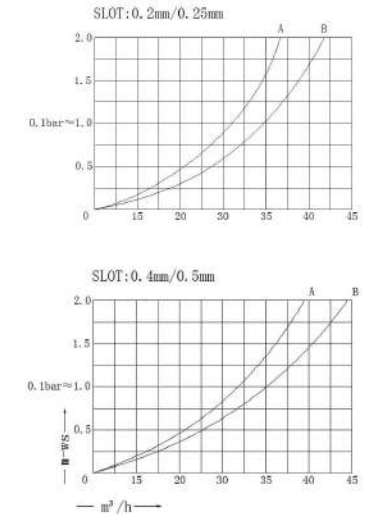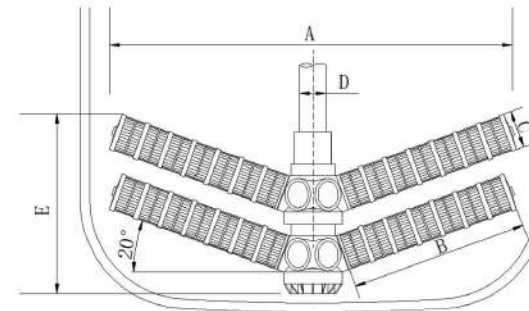

型号 (Item No)	Dimensions (mm)					支管间隙 Slot size	适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	E				
HU6700B2-2	710	337	53	60.5/63	300	0.2/0.25/0.5mm	36"~40" (900~1000mm)	A	4"~8" THREAD
HU6850B2-2	835	402	53	60.5/63	310	0.2/0.25/0.5mm	48"~60" (1200~1500mm)	B	4"~8" THREAD



E5671A (ELBOW CONNECT) E5671B (加长型弯头) (LENGTHENED ELBOW CONNECT)

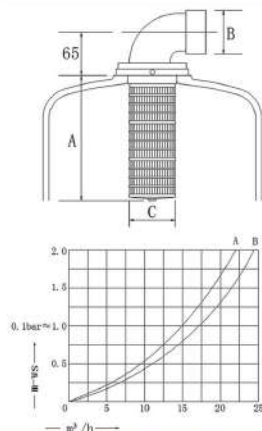

型号 (Item No)	Dimensions (mm)				适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	支管间隙 Slot size			
E5671A E5671B	225	60.3/63	85	0.2/0.25mm	12"~36" (300~900mm)	A	4"~8" THREAD
E5671AL E5671BL	330	60.3/63	85	0.2/0.25mm	36"~40" (900~1000mm)	B	4"~8" THREAD




E5671C

注：弯头可安装负压保护器 (UM1)
Remark: Elbow can be installed vacuum breaker (UM1)



E5671B-L (外螺纹2")
(External thread 2")


型号 (Item No)	Dimensions (mm)				适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	支管间隙 Slot size			
E5671C E5671B-L	225	60.3/63	85	0.2/0.25mm	12"~36" (300~900mm)	A	4"~8" THREAD
E5671CL E5671BL-L	330	60.3/63	85	0.2/0.25mm	36"~40" (900~1000mm)	B	4"~8" THREAD

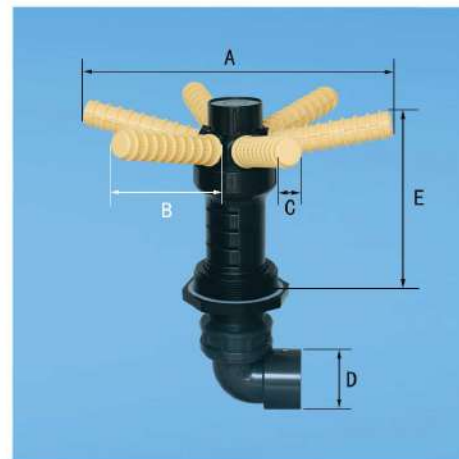


EF6260A1




EF6260A1-L




EF6260A1



EF6450A1




EF6370A1




EF6600A1

注：外螺纹2"在型号后加-L
Remark: Threaded 2" in the model plus -L


型号 (Item No)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (inches/mm)	罐体下开口 (Bottom opening)
	A	B	C	D	E			
EF6260A1	250	84	35	60.3/63	213	0.2/0.25mm	12"~16" (300~400mm)	4"~8" THREAD
EF6370A1	360	138	35	60.3/63	227	0.2/0.25mm	18"~21" (450~550mm)	4"~8" THREAD
EF6450A1	440	182	35	60.3/63	241	0.2/0.25mm	24" (600mm)	4"~8" THREAD
EF6600A1	610	263	35	60.3/63	261	0.2/0.25mm	30" (750mm)	4"~8" THREAD
EF6700A1	690	310	35	60.3/63	272	0.2/0.25mm	36"~40" (900~1000mm)	4"~8" THREAD
EF6800A1	930	433	35	60.3/63	289	0.2/0.25mm	48" (1200mm)	4"~8" THREAD

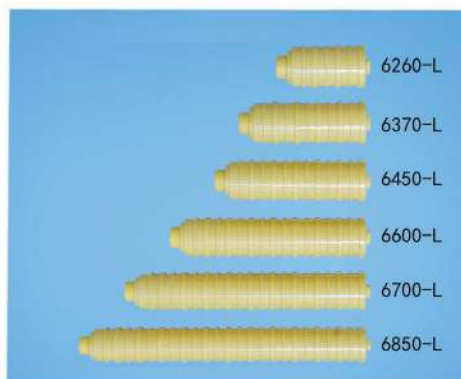


(ELBOW CONNECT)

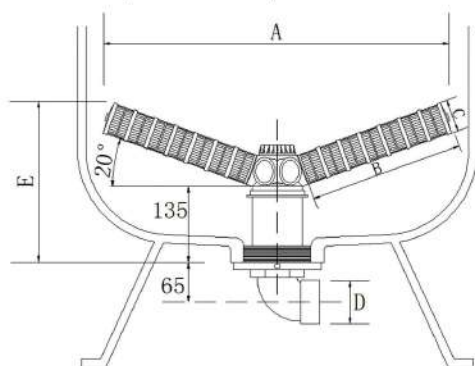


注：外管连接方式可选 1、弯头 2、直接无特殊说明，默认为弯头连接。
Remark: Connect Method of Outer Pipe with water distributor:
1, Elbow Connect 2, Straight Connect

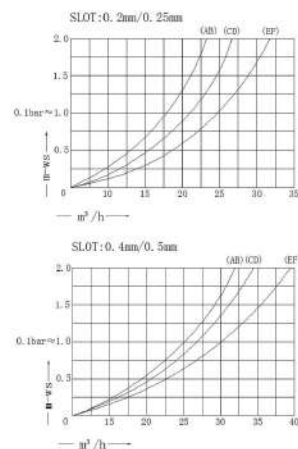

EF6260B2-X

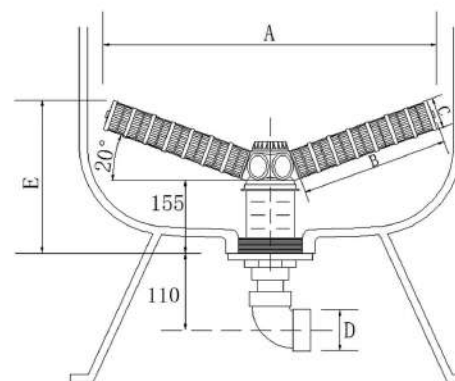

注：外螺纹2"在型号后加-L
Remark: Threaded 2" in the model plus -L

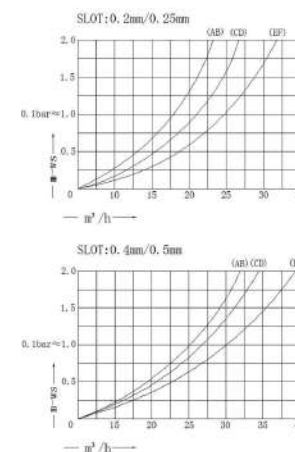

EF6260B2-X-L

型号 (Item No.)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	E				
EF6260B2	296	116	53	60.3/63	156	0.2/0.25/0.5mm	13"~16" (350~400mm)	A	4"~8" THREAD
EF6370B2	416	178	53	60.3/63	176	0.2/0.25/0.5mm	18"~20" (450~500mm)	B	4"~8" THREAD
EF6450B2	455	210	53	60.3/63	186	0.2/0.25/0.5mm	24" (600mm)	C	4"~8" THREAD
EF6600B2	575	275	53	60.3/63	203	0.2/0.25/0.5mm	30" (750mm)	D	4"~8" THREAD
EF6700B2	710	337	53	60.3/63	223	0.2/0.25/0.5mm	36"~40" (900~1000mm)	E	4"~8" THREAD
EF6850B2	835	402	53	60.3/63	233	0.2/0.25/0.5mm	48" (1200mm)	F	4"~8" THREAD

型号 (Item No.)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	E				
EF6260B2-X	296	116	53	60.3/63	179	0.2/0.25/0.5mm	13"~16" (350~400mm)	A	4"~8" THREAD
EF6370B2-X	416	178	53	60.3/63	200	0.2/0.25/0.5mm	18"~20" (450~500mm)	B	4"~8" THREAD
EF6450B2-X	455	210	53	60.3/63	210	0.2/0.25/0.5mm	24" (600mm)	C	4"~8" THREAD
EF6600B2-X	575	275	53	60.3/63	226	0.2/0.25/0.5mm	30" (750mm)	D	4"~8" THREAD
EF6700B2-X	710	337	53	60.3/63	246	0.2/0.25/0.5mm	36"~40" (900~1000mm)	E	4"~8" THREAD
EF6850B2-X	835	402	53	60.3/63	256	0.2/0.25/0.5mm	48" (1200mm)	F	4"~8" THREAD



(ELBOW CONNECT)




(STRAIGHT CONNECT)





HD6700B2-2X




HD6700B2-2X-L

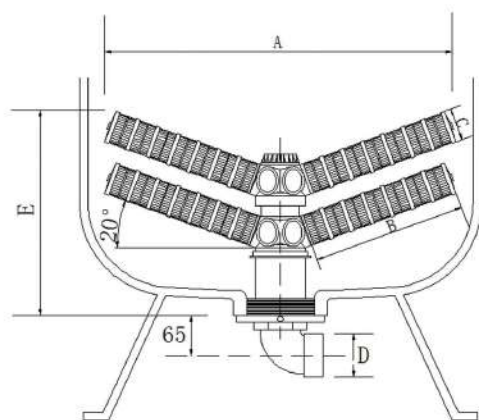

注：外管连接方式可选 1、弯头 2、直接无特殊说明，默认为弯头连接。
Remark: Connect Method of Outer Pipe with water distributor:
1、Elbow Connect 2、Straight Connect

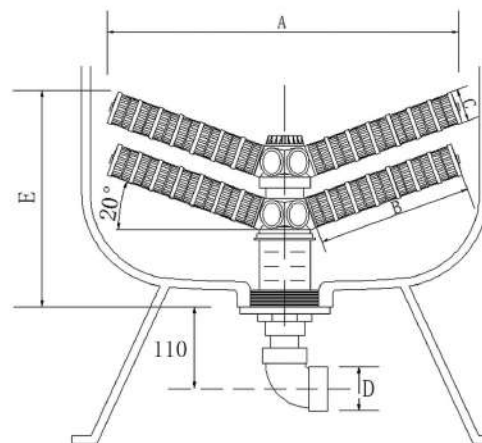
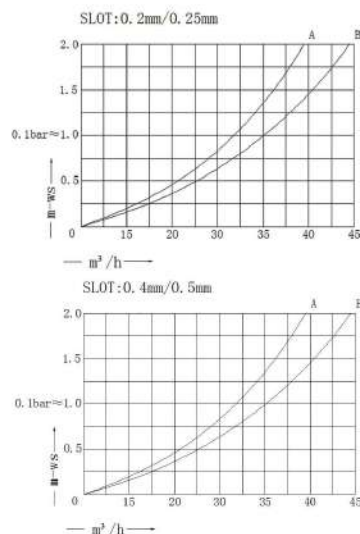


注：外螺纹2"在型号后加-L
Remark: Threaded 2" in the model plus -L

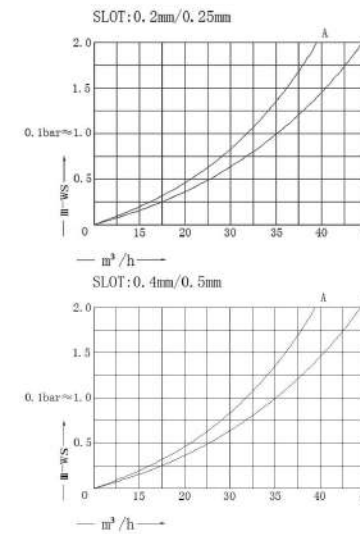

型号 (Item No)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	E				
HD6700B2-2	710	337	53	60.3/63	348	0.2/0.25/0.5mm	36"~40" (900~1000mm)	A	4"~8" THREAD
HD6850B2-2	835	402	53	60.3/63	358	0.2/0.25/0.5mm	48"~63" (1200~1600mm)	B	4"~8" THREAD



型号 (Item No)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	E				
HD6700B2-2X	710	337	53	60.3/63	373	0.2/0.25/0.5mm	36"~40" (900~1000mm)	A	4"~8" THREAD
HD6850B2-2X	835	402	53	60.3/63	383	0.2/0.25/0.5mm	48"~63" (1200~1600mm)	B	4"~8" THREAD

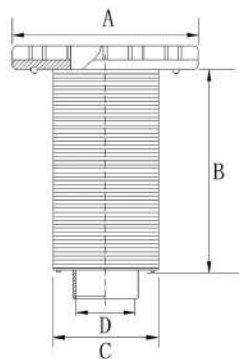


型号 (Item No)	Dimensions (mm)					适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	支管间隙 Slot size			
S436	240	325	140	90	0.25/0.5mm	36"~60" (900~1500mm)	A	6"FLG
S437	240	425	140	90	0.25/0.5mm	60"~80" (1500~2000mm)	B	6"FLG

6"法兰网套式侧装上布水器
(Top mount filter diffuser 6" flange)

6"法兰三爪侧装上布水器
(Top mount 3 laterals diffuser 6" flange)

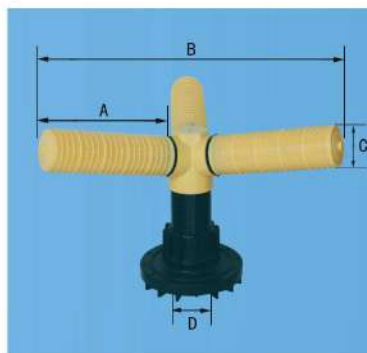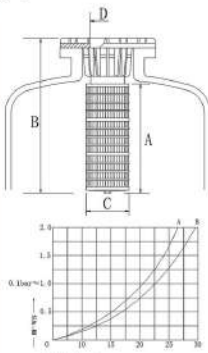


型号 (Item No)	Dimensions (mm)					适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	支管间隙 Slot size			
N176	180	325	85	90	0.2/0.25mm	24"~48" (600~800mm)	A	6"FLG
N176L-1	280	430	85	90	0.2/0.25mm	48"~63" (1000~1200mm)	B	6"FLG
S418	180	500	85	90	0.2/0.25mm	24"~48" (600~1200mm)	A	6"FLG
S419	280	700	85	90	0.2/0.25mm	48"~63" (1200~2000mm)	B	6"FLG

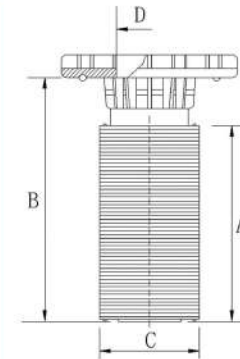


注: S415最大的反洗流量为60T/H
S416, S417最大的反洗流量为120T/H
Remart: The maxmum backwash flow for S415 is 60T/H
The maxmum backwash flow for S416, S417 is 120T/H

型号 (Item No)	Dimensions (mm)					适用罐体Diameter (Inches/mm)	罐体上开口 (Top opening)
	A	B	C	D	支管间隙 Slot size		
S415	260	340	140	90	0.25/0.5mm	40"~48" (1000~1200mm)	6"FLG
S416	310	390	140	90	0.25/0.5mm	48"~64" (1200~1600mm)	6"FLG
S417	410	440	140	90	0.25/0.5mm	64"~80" (1600~2000mm)	6"FLG

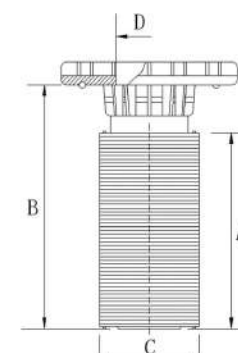


注: S420最大的反洗流量为120T/H
Remart: The maxmum backwash flow for S420 is 120T/H



型号 (Item No)	Dimensions (mm)					适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	支管间隙 Slot size			
S420	410	450	140	110	0.25/0.5mm	24"~48" (600~1200mm)	A	6"FLG

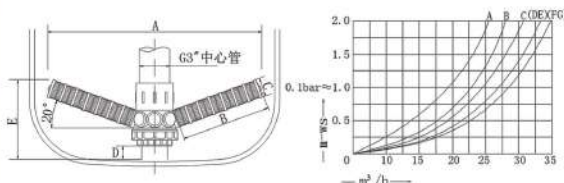




型号 (Item No.)	Dimensions (mm)					支管间隙 Slot size	适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	E				
ES5669B2-1	500	210	53	65	205	0.2/0.25/0.5mm	24" (600mm)	A	6" FLG
ES5670B2-1	630	274	53	65	225	0.2/0.25/0.5mm	30" (750mm)	B	6" FLG
ES5672B2-1	750	350	53	65	235	0.2/0.25/0.5mm	36" (900mm)	C	6" FLG
ES5673B2-1	870	420	53	65	255	0.2/0.25/0.5mm	40" (1000mm)	D	6" FLG
ES5674B2-1	985	480	53	65	275	0.2/0.25/0.5mm	48" (1200mm)	E	6" FLG
ES5675B2-1	1325	600	53	65	295	0.2/0.25/0.5mm	60" (1500mm)	F	6" FLG
ES5676B2-1	1445	670	53	65	305	0.2/0.25/0.5mm	65"~80" (1600~2000mm)	G	6" FLG

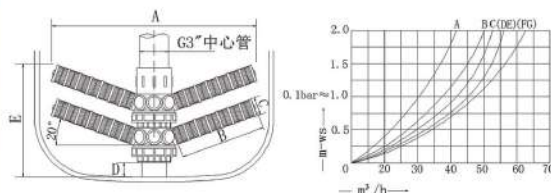



型号 (Item No.)	Dimensions (mm)					支管间隙 Slot size	适用罐体Diameter (Inches/mm)	流量 Flow	罐体上开口 (Top opening)
	A	B	C	D	E				
ES5669B2-2	500	210	53	65	342	0.2/0.25/0.5mm	24" (600mm)	A	6" FLG
ES5670B2-2	630	274	53	65	352	0.2/0.25/0.5mm	30" (750mm)	B	6" FLG
ES5672B2-2	750	350	53	65	362	0.2/0.25/0.5mm	36" (900mm)	C	6" FLG
ES5673B2-2	870	420	53	65	377	0.2/0.25/0.5mm	40" (1000mm)	D	6" FLG
ES5674B2-2	985	480	53	65	387	0.2/0.25/0.5mm	48" (1200mm)	E	6" FLG
ES5675B2-2	1325	600	53	65	397	0.2/0.25/0.5mm	60" (1500mm)	F	6" FLG
ES5676B2-2	1445	670	53	65	417	0.2/0.25/0.5mm	65"~80" (1600~2000mm)	G	6" FLG

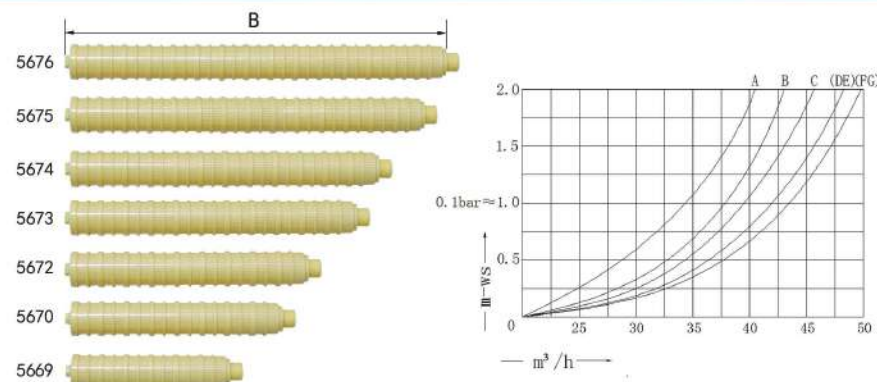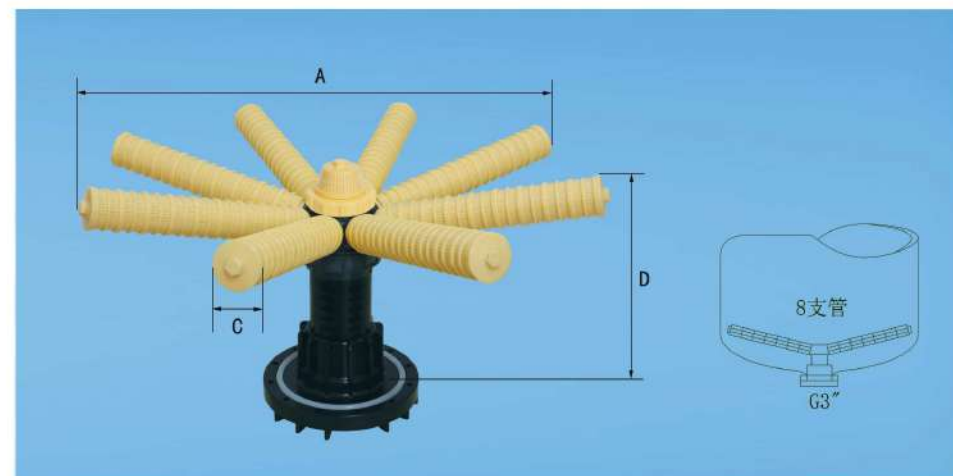




型号 (Item No.)	Dimensions (mm)					支管间隙 Slot size	适用罐体 Diameter (inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	E				
EF5669B2-1	500	210	53	320		0.2/0.25/0.5mm	24" (600mm)	A	6" FLG
EF5670B2-1	630	274	53	340		0.2/0.25/0.5mm	30" (750mm)	B	6" FLG
EF5672B2-1	750	350	53	355		0.2/0.25/0.5mm	36" (900mm)	C	6" FLG
EF5673B2-1	870	420	53	375		0.2/0.25/0.5mm	40" (1000mm)	D	6" FLG
EF5674B2-1	985	480	53	395		0.2/0.25/0.5mm	48" (1200mm)	E	6" FLG
EF5675B2-1	1325	600	53	415		0.2/0.25/0.5mm	60" (1500mm)	F	6" FLG
EF5676B2-1	1445	670	53	430		0.2/0.25/0.5mm	65"~80" (1600~2000mm)	G	6" FLG

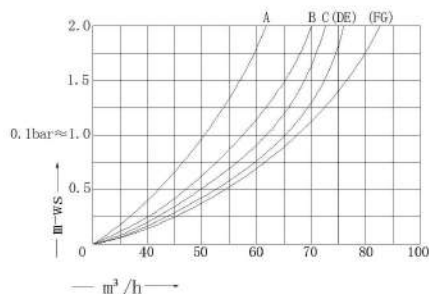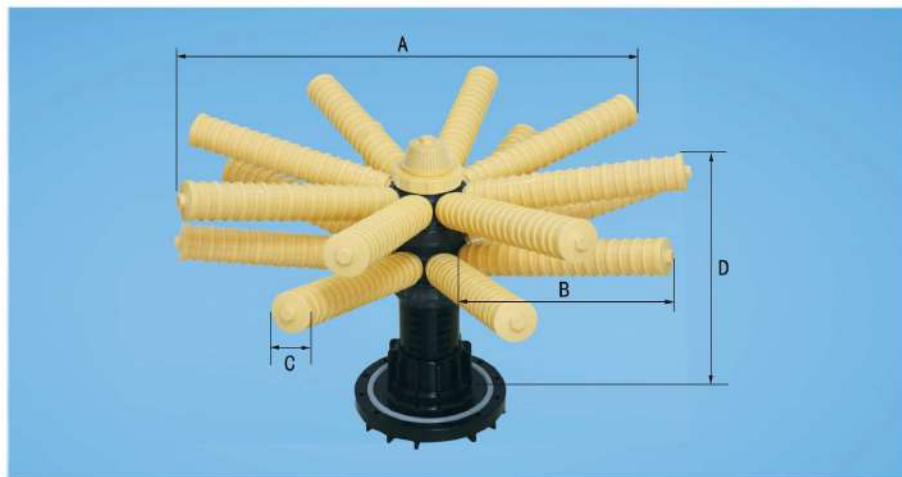

型号 (Item No)	Dimensions (mm)					适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	支管间隙 Slot size			
EF5669B2-2	500	210	53	450	0.2/0.25/0.5mm	24" (600mm)	A	6"FLG
EF5670B2-2	630	274	53	460	0.2/0.25/0.5mm	30" (750mm)	B	6"FLG
EF5672B2-2	750	350	53	465	0.2/0.25/0.5mm	36" (900mm)	C	6"FLG
EF5673B2-2	870	420	53	475	0.2/0.25/0.5mm	40" (1000mm)	D	6"FLG
EF5674B2-2	985	480	53	485	0.2/0.25/0.5mm	48" (1200mm)	E	6"FLG
EF5675B2-2	1325	600	53	495	0.2/0.25/0.5mm	60" (1500mm)	F	6"FLG
EF5676B2-2	1445	670	53	510	0.2/0.25/0.5mm	65"~80" (1600~2000mm)	G	6"FLG

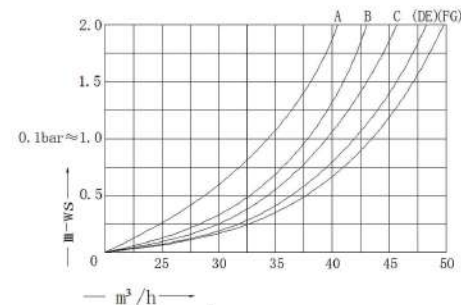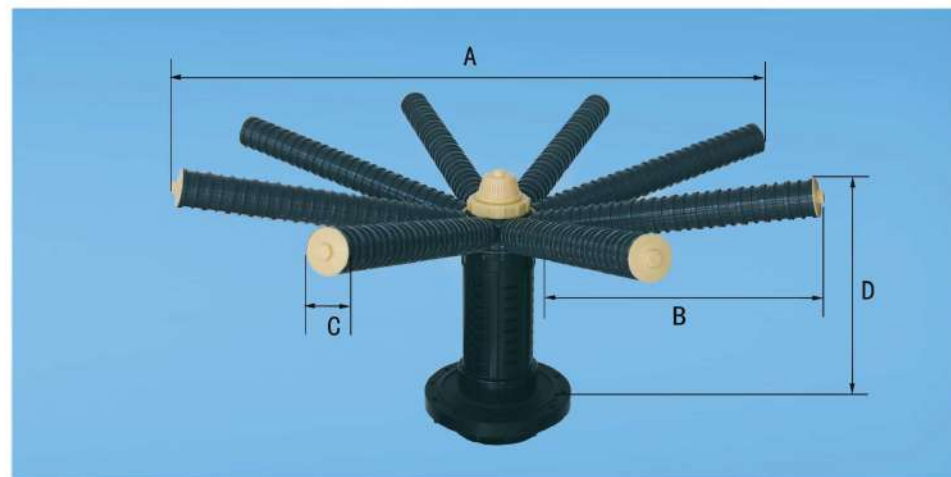


型号 (Item No)	Dimensions (mm)					适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	支管间隙 Slot size			
EF5669B-1X	500	210	53	390	0.25/0.5mm	24" (600mm)	A	6"FLG
EF5670B-1X	630	274	53	410	0.25/0.5mm	30" (750mm)	B	6"FLG
EF5672B-1X	750	350	53	425	0.25/0.5mm	36" (900mm)	C	6"FLG
EF5673B-1X	870	420	53	445	0.25/0.5mm	40" (1000mm)	D	6"FLG
EF5674B-1X	985	480	53	465	0.25/0.5mm	48" (1200mm)	E	6"FLG
EF5675B-1X	1325	600	53	485	0.25/0.5mm	60" (1500mm)	F	6"FLG
EF5676B-1X	1445	670	53	500	0.25/0.5mm	65"~80" (1600~2000mm)	G	6"FLG

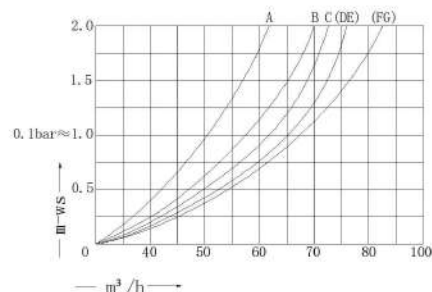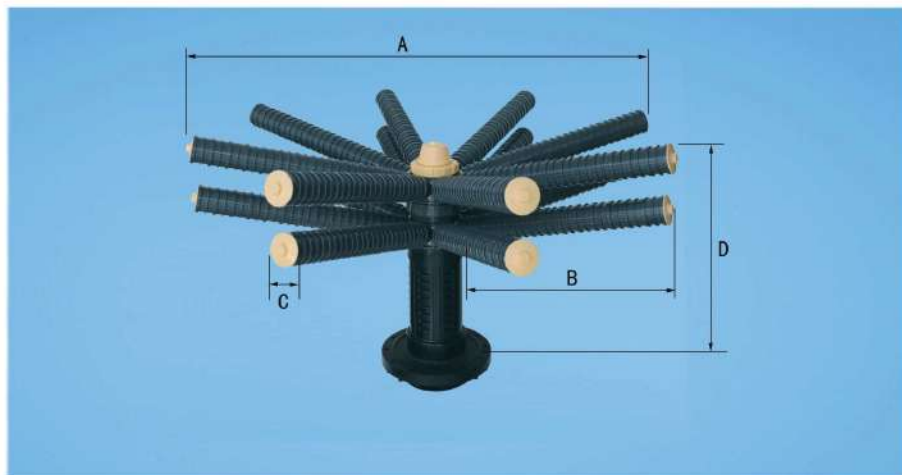

型号 (Item No)	Dimensions (mm)					适用罐体 Diameter (Inches/mm)	流量 Flow	罐体下开口 (Bottom opening)
	A	B	C	D	支管间隙 Slot size			
EF5669B-2X	500	210	53	520	0.25/0.5mm	24" (600mm)	A	6"FLG
EF5670B-2X	630	274	53	530	0.25/0.5mm	30" (750mm)	B	6"FLG
EF5672B-2X	750	350	53	535	0.25/0.5mm	36" (900mm)	C	6"FLG
EF5673B-2X	870	420	53	545	0.25/0.5mm	40" (1000mm)	D	6"FLG
EF5674B-2X	985	480	53	555	0.25/0.5mm	48" (1200mm)	E	6"FLG
EF5675B-2X	1325	600	53	565	0.25/0.5mm	60" (1500mm)	F	6"FLG
EF5676B-2X	1445	670	53	580	0.25/0.5mm	65"~80" (1600~2000mm)	G	6"FLG



布水管
(Lateral)

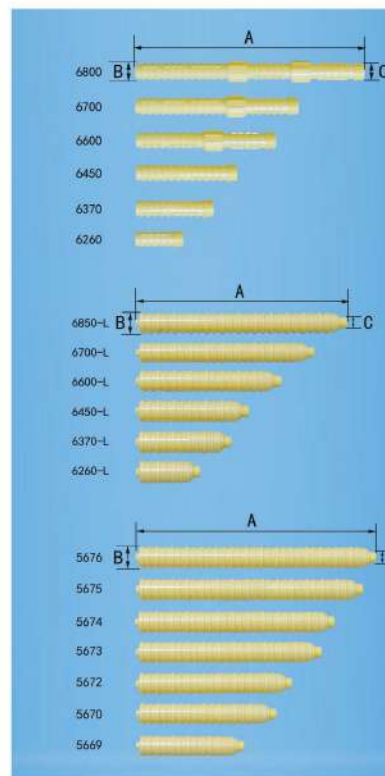


A长度	B直径	C螺纹连接尺寸	支管缝隙
100mm	35	1"	0.2/0.25mm
155mm	35	1"	0.2/0.25mm
200mm	35	1"	0.2/0.25mm
280mm	35	1"	0.2/0.25mm
328mm	35	1"	0.2/0.25mm
452mm	35	1"	0.2/0.25mm

A长度	B直径	C螺纹连接尺寸	支管缝隙
130mm	53	1"	0.2/0.25/0.4mm
200mm	53	1"	0.2/0.25/0.4mm
230mm	53	1"	0.2/0.25/0.4mm
295mm	53	1"	0.2/0.25/0.4mm
355mm	53	1"	0.2/0.25/0.4mm
420mm	53	1"	0.2/0.25/0.4mm



A长度	B直径	C螺纹连接尺寸	支管缝隙
228mm	53	1"	0.2/0.25/0.4mm
290mm	53	1"	0.2/0.25/0.4mm
350mm	53	1"	0.2/0.25/0.4mm
420mm	53	1"	0.2/0.25/0.4mm
480mm	53	1"	0.2/0.25/0.4mm
600mm	53	1"	0.2/0.25/0.4mm
670mm	53	1"	0.2/0.25/0.4mm




N9901




N9902




N9903




N9904




4"黑二通 (4"Tank head)



N9911



N9912



型号 (Item No)	名称 (Discription)	适用罐体Diameter (Inches/mm)
N9901	2.5"~4" THREAD	6"~16" (150~400mm)
N9902	2.5"~4" THREAD	6"~16" (150~400mm)
N9903	2.5"~4" THREAD	6"~16" (150~400mm)
N9904	2.5"~4" THREAD	6"~16" (150~400mm)
N9911	4"~8" THREAD	16"~36" (400~900mm)
N9912	4"~8" THREAD	16"~36" (400~900mm)


堵头(Threaded Closures)



N9912



N9913




N9913-A




N9914


N9915



N9912



N9913



N9914

型号 (Item No)	名称 (Discription)	外螺纹 (Outer Thread)	材质 (Material)
N9912	2.5"堵头 (2.5"Thread closures)	2.5"THREAD	ABS
N9913	4"堵头 (4"Thread closures)	4"THREAD	ABS
N9914	6"堵头 (6"Thread closures)	6"THREAD	ABS
N9915	6"法兰堵头 (6"Flange thread closures)		ABS

变径 (Threaded Adapters)



N9903



N9903-A




N9904

N9905


型号 (Item No)	名称 (Discription)	外螺纹 (Outer Thread)	内螺纹 (Inner Thread)
N9903	4"~2.5"变径 (4"~2.5"Thread adapter)	4"THREAD	2.5"THREAD
N9904	6"~4"变径 (6"~4"Thread adapter)	6"THREAD	4"THREAD
N9905	6"~4"法兰变径 (6"~4"Flange thread adapter)		4"THREAD



UM1




UM2




水帽 (Nozzle)




N1201



N1202



N1203



盐阀系列(Brine Valve)



其它系列(Accessories)

