

Specification

A small sized fibre optic light source powered by high quality LED's.


With a choice of monochromatic whites, it can also be customised with a twinkle wheel for decorative purposes. Coupled with DMX512 control system or a DALI dimming system it can be linked to a variety of controllers for more intricate displays.

The FP2000 is ideally used for star ceilings and varying indoor applications, its size makes it even more adaptable for small, confined spaces.

Technical Information

IP Rating	IP20
Input Voltage	100V - 240V AC
Power Consumption	20W
Control	DMX512 / DALI/ 0-10V
Min. Ambient Temp	-10°C
Max. Ambient Temp	50°C
Weight	1.5kgs
Material/Finish	Die-cast Alluminium
Dimensions	L182 x W115 x H90

Technical Data Sheet Light Sources FP-2000

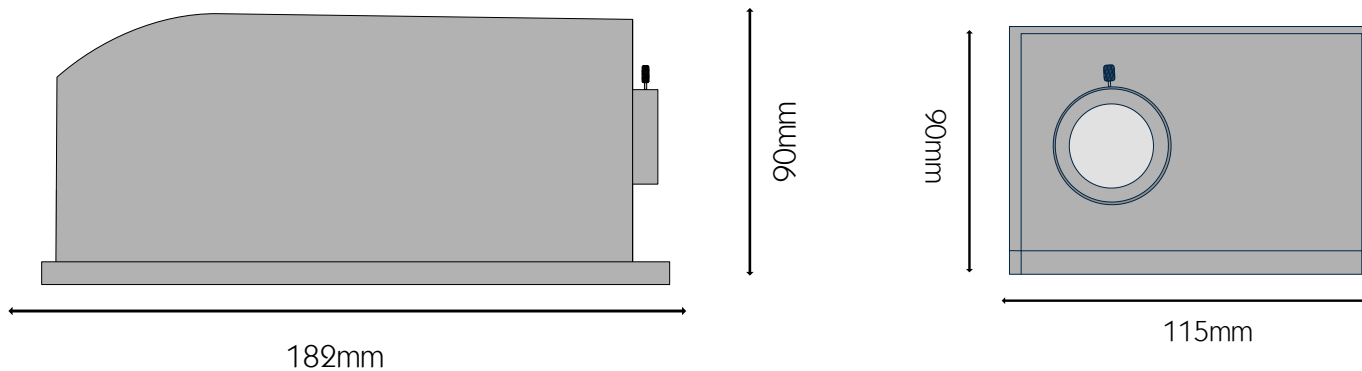

Optical Performance

Device Colour	Port Lumens*	Minimum CRI
2700K White	1300lm	80
3000K White	1350lm	80
4000K White	1400lm	80
6000K White	1200lm	80

*Typical Value at 25 °C ambient

Ordering Codes

Model	Device Colour	Fibre Port Size	Twinkle Wheel
FP-2000	2700K	30mm	Twinkle Wheel
	3000K		No Twinkle Wheel
	4000K		
	6000K		

